




# OIL ANALYSIS REPORT



Area  
**OKLAHOMA/102/EG - DOZER**  
 Machine Id  
**36.18L [OKLAHOMA^102^EG - DOZER]**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (7 GAL)**

Sample Rating Trend

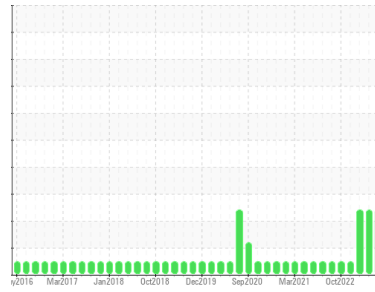

## DIAGNOSIS

### Recommendation

We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of fuel present in the oil. Elemental level of silicon (Si) above normal indicating ingress of seal material.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0873875</b>	WC0821858	WC0778252
Sample Date	Client Info	<b>17 Apr 2024</b>	09 Aug 2023	20 Mar 2023
Machine Age	hrs	<b>14259</b>	13830	13469
Oil Age	hrs	<b>429</b>	361	306
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>ABNORMAL</b>	SEVERE	SEVERE

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>49</b>	11	12
Chromium	ppm ASTM D5185m >20	<b>3</b>	0	0
Nickel	ppm ASTM D5185m >2	<b>&lt;1</b>	0	0
Titanium	ppm ASTM D5185m >2	<b>1</b>	0	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >25	<b>10</b>	2	4
Lead	ppm ASTM D5185m >40	<b>5</b>	2	1
Copper	ppm ASTM D5185m >330	<b>4</b>	<1	<1
Tin	ppm ASTM D5185m >15	<b>1</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>37</b>	27	29
Barium	ppm ASTM D5185m 0	<b>2</b>	0	0
Molybdenum	ppm ASTM D5185m 0	<b>44</b>	36	34
Manganese	ppm ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 0	<b>491</b>	445	401
Calcium	ppm ASTM D5185m	<b>1697</b>	1636	1485
Phosphorus	ppm ASTM D5185m	<b>813</b>	682	608
Zinc	ppm ASTM D5185m	<b>914</b>	826	709
Sulfur	ppm ASTM D5185m	<b>2695</b>	2688	1922

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>▲ 60</b>	5	6
Sodium	ppm ASTM D5185m	<b>&lt;1</b>	3	2
Potassium	ppm ASTM D5185m >20	<b>3</b>	0	0
Fuel	% ASTM D3524 >5	<b>▲ 7.5</b>	▲ 11.4	▲ 8.0

## INFRA-RED






method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.8</b>	0.6	0.7
Nitration	Abs/cm *ASTM D7624 >20	<b>9.4</b>	8.5	9.5
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>23.2</b>	20.9	22.2

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>21.7</b>	18.7	20.2
Base Number (BN)	mg KOH/g ASTM D2896 9.4	<b>9.5</b>	8.2	8.8







# OIL ANALYSIS REPORT

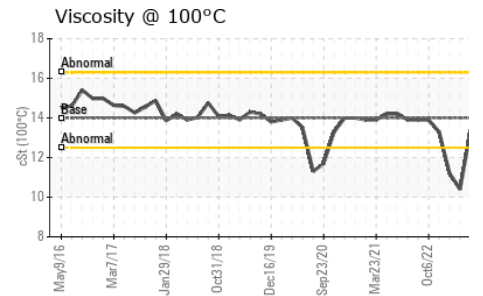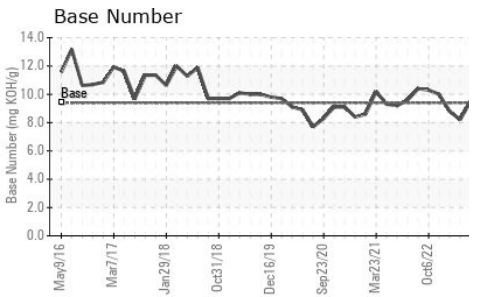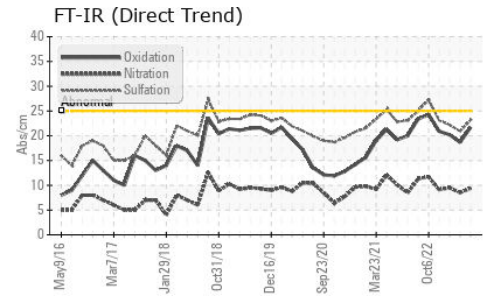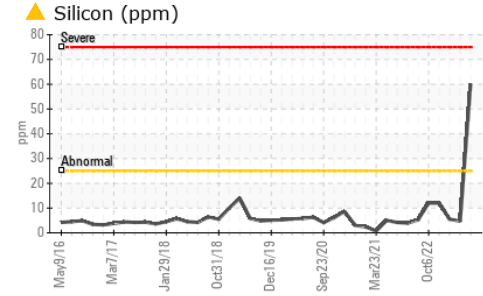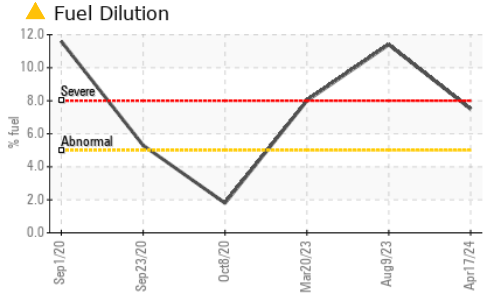

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14	13.4	10.4

## GRAPHS

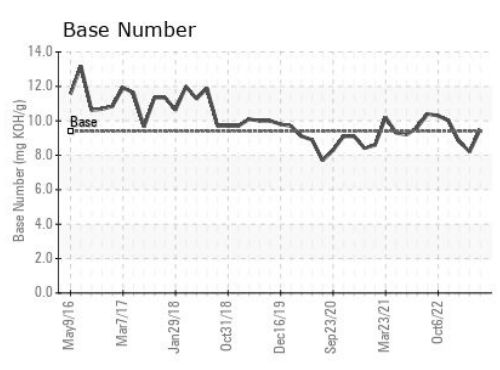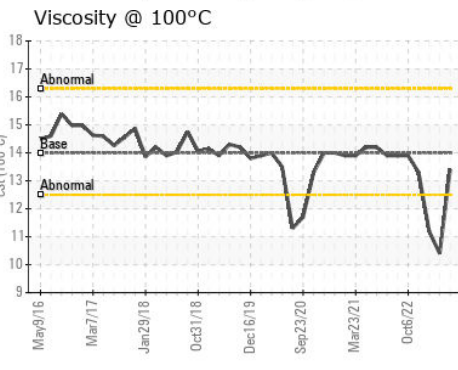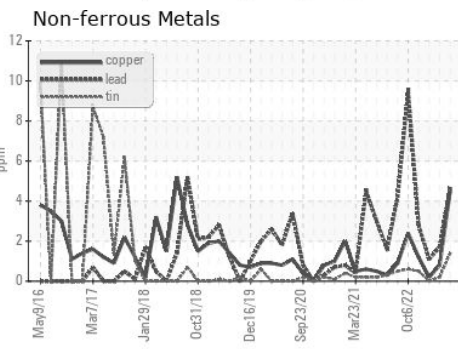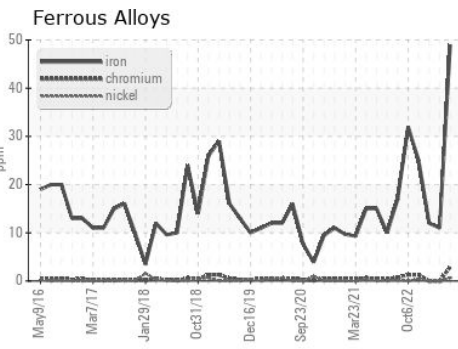

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0873875 **Received** : 10 May 2024  
**Lab Number** : 06176465 **Tested** : 15 May 2024  
**Unique Number** : 11022518 **Diagnosed** : 15 May 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: PercentFuel, TBN )

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: DOUG KING  
 doug.king@sherwood.net  
 T: (316)617-3161  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)