




# OIL ANALYSIS REPORT

## Sample Rating Trend

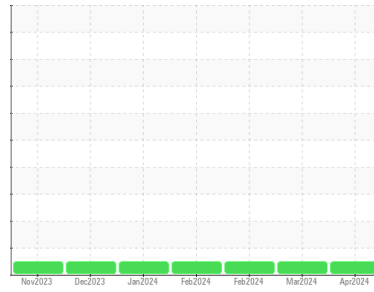

**NORMAL**



Machine Id

**1709**

Component

**Diesel Engine**

Fluid

**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0897887</b>	WC0894005	WC0893978
Sample Date	Client Info		<b>29 Apr 2024</b>	29 Mar 2024	29 Feb 2024
Machine Age	mls	Client Info	<b>0</b>	0	0
Oil Age	mls	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	Changed	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>100	<b>10</b>	7	9
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	1	<1
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>93</b>	66	70
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	250	<b>0</b>	2	0
Barium	ppm	ASTM D5185m	10	<b>2</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>59</b>	56	57
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	450	<b>876</b>	914	1021
Calcium	ppm	ASTM D5185m	3000	<b>1090</b>	1015	1087
Phosphorus	ppm	ASTM D5185m	1150	<b>1027</b>	990	1040
Zinc	ppm	ASTM D5185m	1350	<b>1165</b>	1218	1261
Sulfur	ppm	ASTM D5185m	4250	<b>2952</b>	3208	3045

### CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	<b>15</b>	8	4
Sodium	ppm	ASTM D5185m	>158	<b>2</b>	3	3
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	0	0

### INFRA-RED




	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.3	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.1</b>	7.8	7.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.9</b>	22.7	22.7

### FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>23.2</b>	23.5	22.8
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>6.9</b>	6.5	6.9











# OIL ANALYSIS REPORT

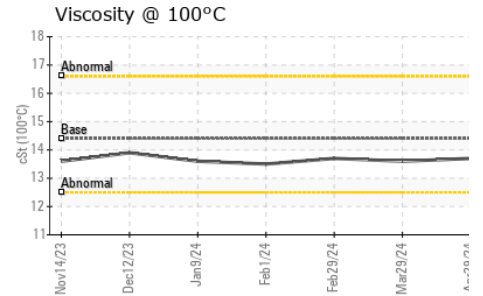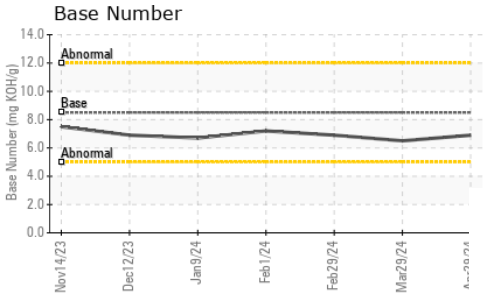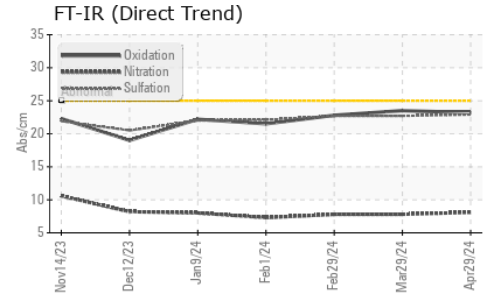

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	13.7	13.6

### GRAPHS

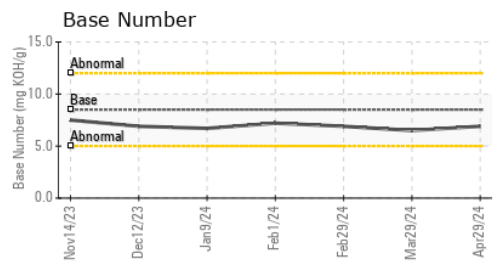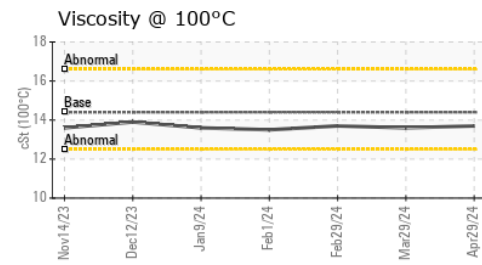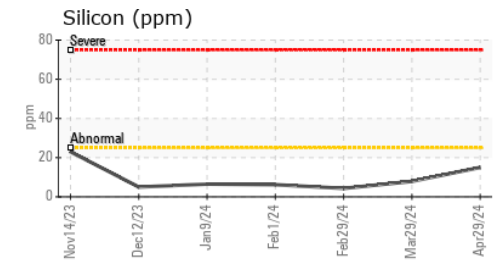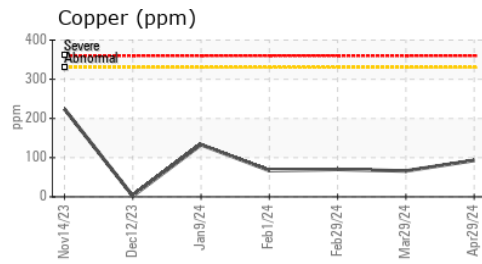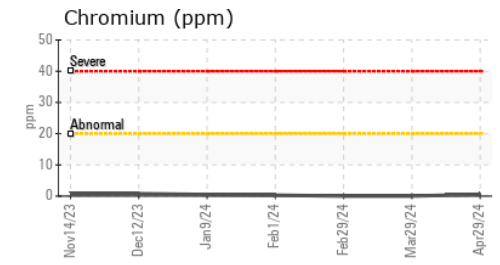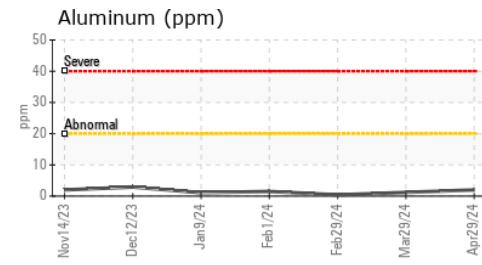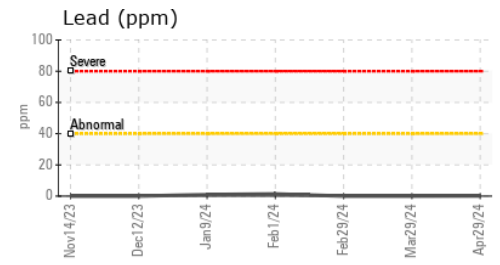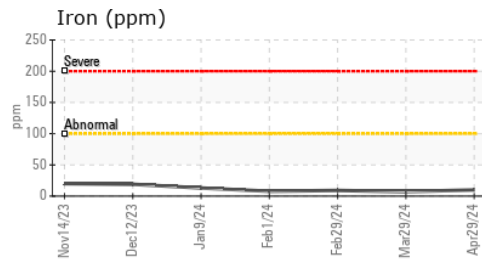

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0897887      **Received** : 13 May 2024  
**Lab Number** : 06176790      **Tested** : 14 May 2024  
**Unique Number** : 11022843      **Diagnosed** : 14 May 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**GO DURHAM - RAPT**  
 1903 FAYETTEVILLE ST  
 DURHAM, NC  
 US 27701  
 Contact: Robert Iosiniecki  
 Robert.iosiniecki@ratpdev.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)