




# OIL ANALYSIS REPORT

## Sample Rating Trend

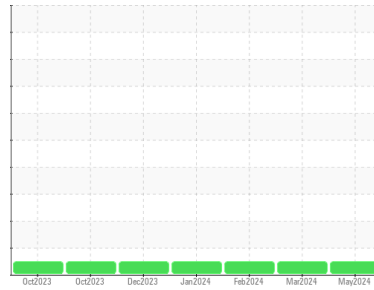

**NORMAL**



Machine Id

**1019**

Component

**Diesel Engine**

Fluid

**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0897890</b>	WC0893957	WC0894019
Sample Date	Client Info			<b>03 May 2024</b>	27 Mar 2024	26 Feb 2024
Machine Age	mls	Client Info		<b>0</b>	0	0
Oil Age	mls	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>Changed</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method		>5	<b>&lt;1.0</b>	<1.0	<1.0

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>19</b>	17	16
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	1	<1
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>2</b>	1	<1
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	<b>0</b>	2	0
Barium	ppm	ASTM D5185m	10	<b>2</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>63</b>	61	62
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	450	<b>929</b>	979	1094
Calcium	ppm	ASTM D5185m	3000	<b>1138</b>	1090	1177
Phosphorus	ppm	ASTM D5185m	1150	<b>1064</b>	1054	1131
Zinc	ppm	ASTM D5185m	1350	<b>1224</b>	1303	1348
Sulfur	ppm	ASTM D5185m	4250	<b>3111</b>	3354	3155

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>17</b>	11	4
Sodium	ppm	ASTM D5185m	>158	<b>&lt;1</b>	2	1
Potassium	ppm	ASTM D5185m	>20	<b>5</b>	<1	0
Water	%	ASTM D6304	>0.2	<b>NEG</b>	NEG	NEG
Glycol	%	*ASTM D2982		<b>NEG</b>	NEG	NEG


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>1.4</b>	1.4	1.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.0</b>	11.0	10.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>26.9</b>	24.8	22.2

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>27.0</b>	23.7	19.5
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>6.2</b>	6.5	7.1




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

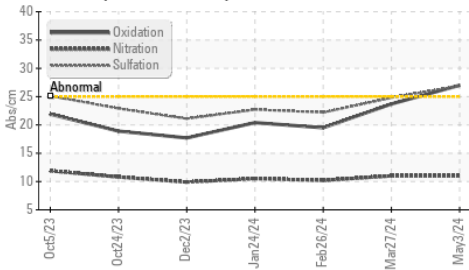


Glycol Contamination

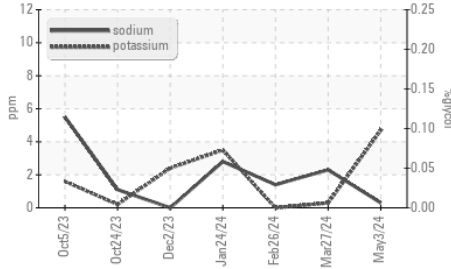


Viscosity @ 100°C

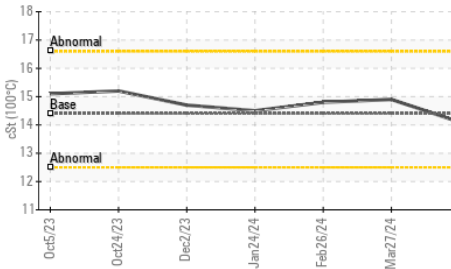

Glycol Contamination

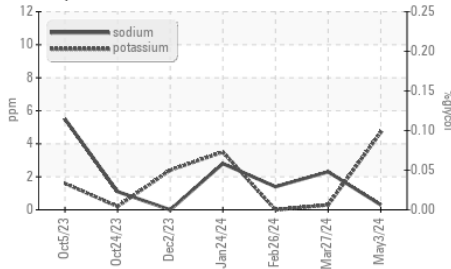


Viscosity @ 100°C



VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	14.1	14.9

## GRAPHS

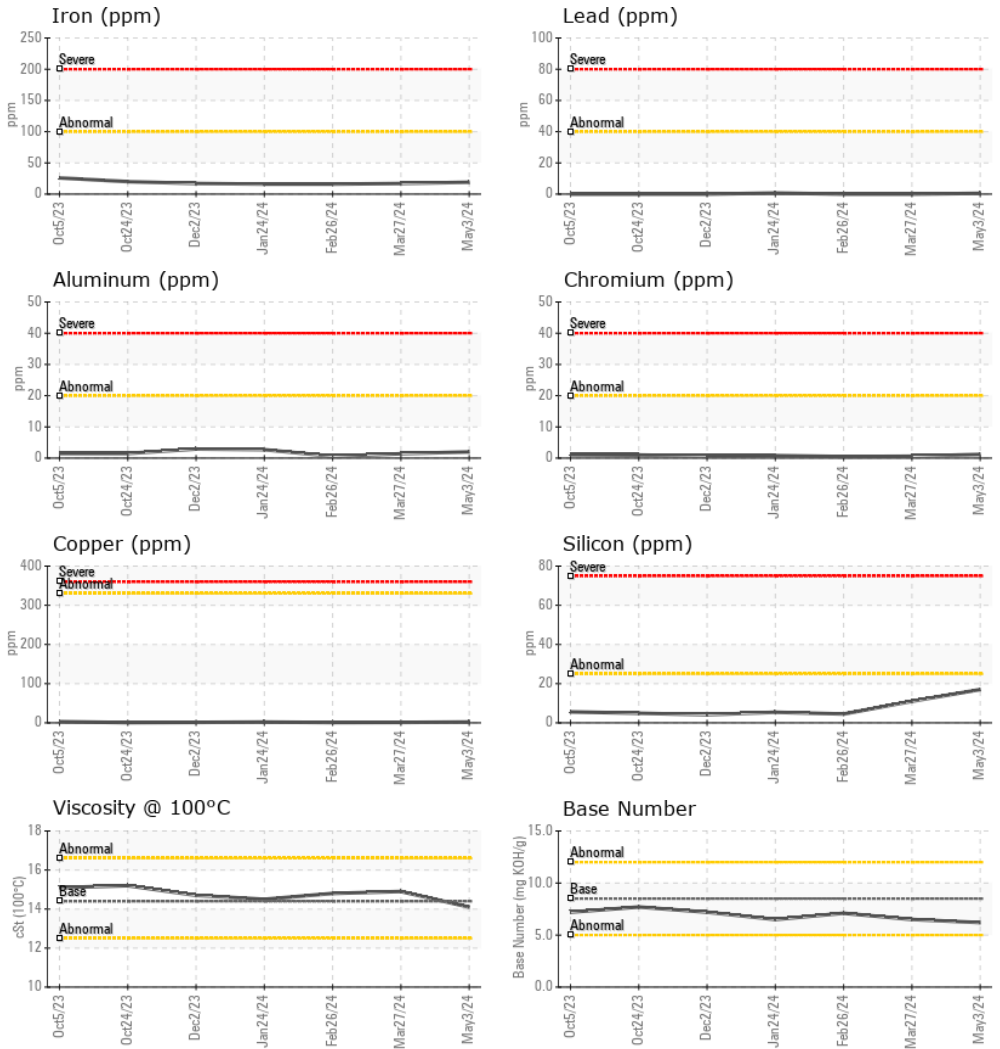

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0897890 **Received** : 13 May 2024  
**Lab Number** : 06176793 **Tested** : 15 May 2024  
**Unique Number** : 11022846 **Diagnosed** : 15 May 2024 - Sean Felton  
**Test Package** : MOB 1 ( Additional Tests: Glycol, KF, TBN )

**GO DURHAM - RAPT**  
 1903 FAYETTEVILLE ST  
 DURHAM, NC  
 US 27701

Contact: Robert Iosiniecki  
 Robert.iosiniecki@ratpdev.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: