




# OIL ANALYSIS REPORT

## Sample Rating Trend

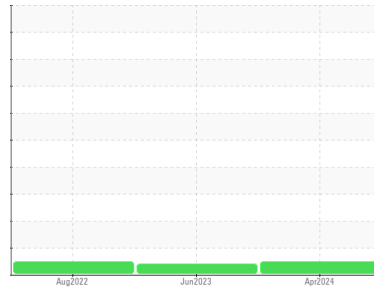

**NORMAL**



Machine Id

**22201**

Component

**Diesel Engine**

Fluid

**DIESEL ENGINE OIL SAE 10W30 (--- QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0901345</b>	WC0784078	WC0699792
Sample Date	Client Info			<b>25 Apr 2024</b>	08 Jun 2023	31 Aug 2022
Machine Age	mls	Client Info		<b>284906</b>	175247	72245
Oil Age	mls	Client Info		<b>50000</b>	50000	50000
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	ATTENTION	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	0.2	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>49</b>	46	76
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>20	<b>7</b>	9	40
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185m	>330	<b>7</b>	6	22
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	1	3
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	<b>3</b>	15	9
Barium	ppm	ASTM D5185m	10	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>70</b>	89	23
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	3
Magnesium	ppm	ASTM D5185m	450	<b>1029</b>	1164	809
Calcium	ppm	ASTM D5185m	3000	<b>1380</b>	1945	1421
Phosphorus	ppm	ASTM D5185m	1150	<b>1159</b>	1383	872
Zinc	ppm	ASTM D5185m	1350	<b>1377</b>	1729	1035
Sulfur	ppm	ASTM D5185m	4250	<b>3251</b>	4447	3301




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>15</b>	17	16
Sodium	ppm	ASTM D5185m		<b>4</b>	2	4
Potassium	ppm	ASTM D5185m	>20	<b>6</b>	14	120

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.7</b>	0.6	0.7
Nitration	Abs/cm	*ASTM D7624	>20	<b>14.0</b>	12.6	14.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>28.4</b>	27.1	30.1

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>26.8</b>	24.7	26.3
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>4.8</b>	5.5	5.9







# OIL ANALYSIS REPORT

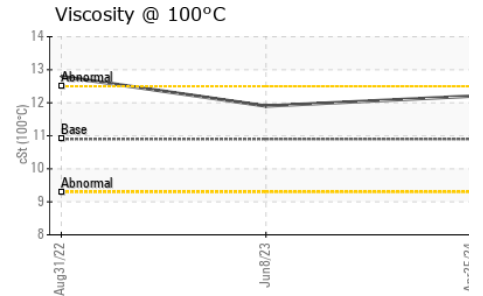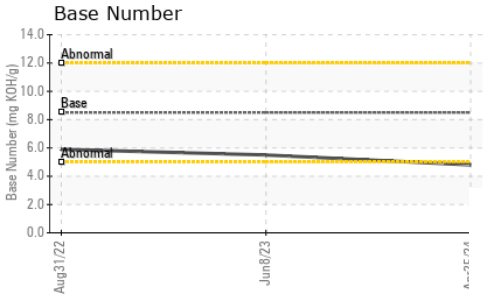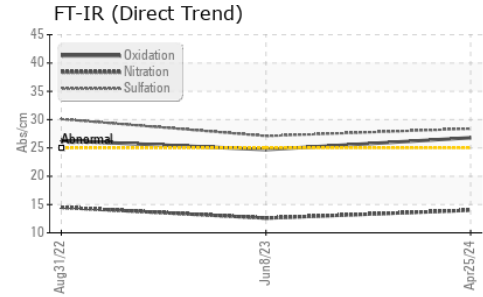

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	10.9	12.2	11.9	12.8

### GRAPHS

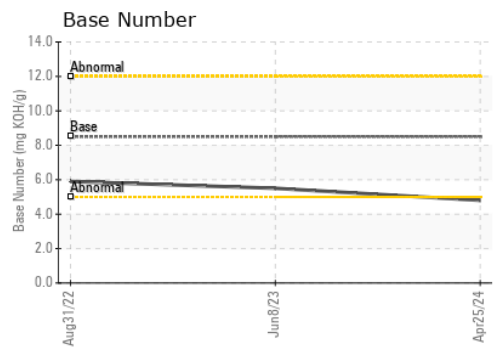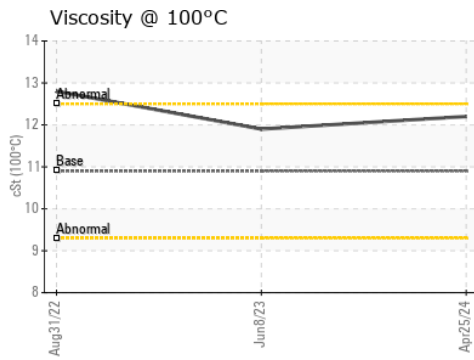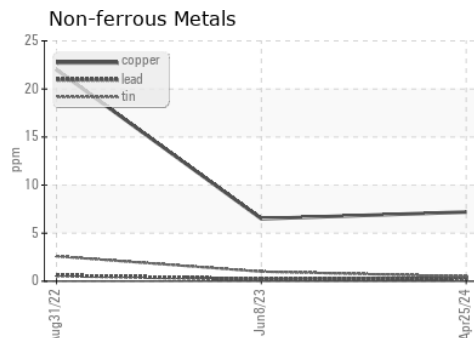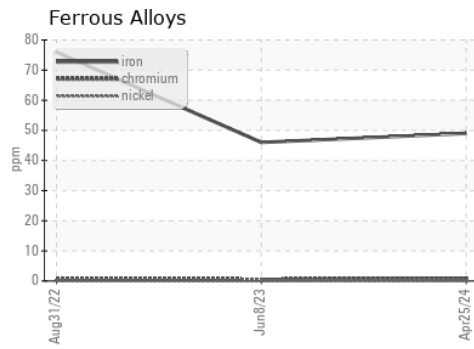

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0901345      **Received** : 13 May 2024  
**Lab Number** : 06176927      **Tested** : 14 May 2024  
**Unique Number** : 11022980      **Diagnosed** : 14 May 2024 - Don Baldrige  
**Test Package** : FLEET

**MID-ATLANTIC TRANSPORT**  
 38 IRONSIDE CT  
 WILLINGBORO, NJ  
 US 08046  
 Contact: GARY LAWYER  
 gary@midatlantictrans.com  
 T: (609)864-6948  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)