

Machine Id
FIBER BAILER BL134063
 Component
Hydraulic System
 Fluid
AW HYDRAULIC OIL ISO 46 (--- GAL)

DIAGNOSIS
Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

Wear

All component wear rates are normal.

Contamination

Moderate concentration of visible dirt/debris present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oils additive package is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			JR0206171	JR0188557	JR0188558
Sample Date	Client Info			07 May 2024	06 Apr 2024	08 Mar 2024
Machine Age	hrs	Client Info		30040	29773	29533
Oil Age	hrs	Client Info		0	0	0
Oil Changed	Client Info			Changed	N/A	Changed
Sample Status				ABNORMAL	SEVERE	SEVERE

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	NEG	NEG	NEG




WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		19	19	20
Iron	ppm	ASTM D5185m	>20	4	4	0
Chromium	ppm	ASTM D5185m	>10	<1	1	<1
Nickel	ppm	ASTM D5185m	>10	0	<1	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	1	0
Lead	ppm	ASTM D5185m	>10	0	1	0
Copper	ppm	ASTM D5185m	>75	3	1	0
Tin	ppm	ASTM D5185m	>10	<1	1	0
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	<1	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0	0	0
Barium	ppm	ASTM D5185m	5	0	0	0
Molybdenum	ppm	ASTM D5185m	5	0	1	0
Manganese	ppm	ASTM D5185m		1	<1	0
Magnesium	ppm	ASTM D5185m	25	<1	2	0
Calcium	ppm	ASTM D5185m	200	42	54	36
Phosphorus	ppm	ASTM D5185m	300	345	368	341
Zinc	ppm	ASTM D5185m	370	427	411	433
Sulfur	ppm	ASTM D5185m	2500	998	971	960

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<1	<1	<1
Sodium	ppm	ASTM D5185m		1	0	0
Potassium	ppm	ASTM D5185m	>20	0	<1	0

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	---	▲ 52230	▲ 80468
Particles >6µm		ASTM D7647	>1300	---	▲ 9305	▲ 24506
Particles >14µm		ASTM D7647	>160	---	● 283	▲ 1749
Particles >21µm		ASTM D7647	>40	---	● 63	▲ 429
Particles >38µm		ASTM D7647	>10	---	3	14
Particles >71µm		ASTM D7647	>3	---	0	1
Oil Cleanliness		ISO 4406 (c)	>19/17/14	---	▲ 23/20/15	▲ 24/22/18

OIL ANALYSIS REPORT

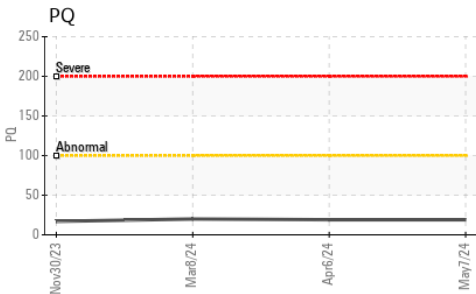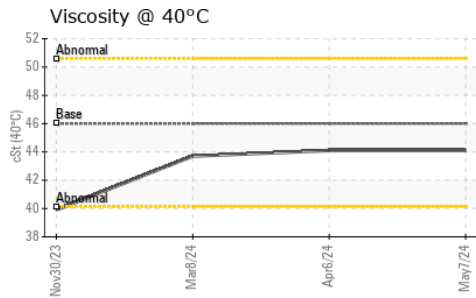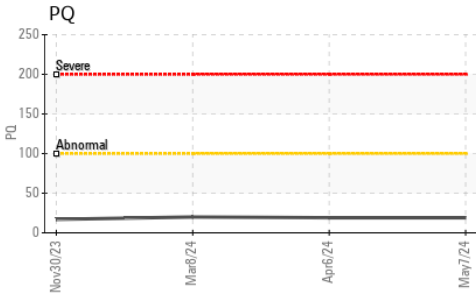


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.34	0.38	0.34





VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	▲ MODER	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.1	44.1	43.7

SAMPLE IMAGES

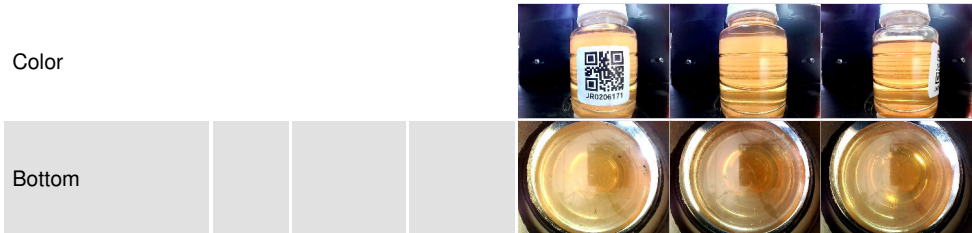

GRAPHS

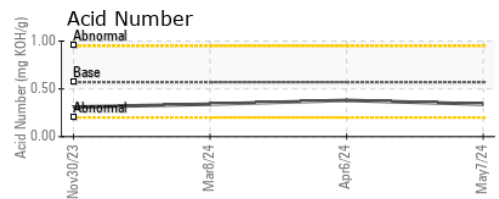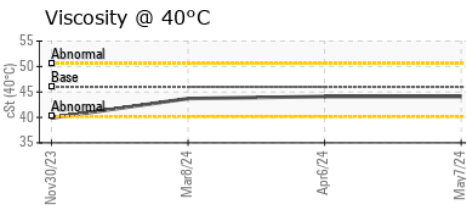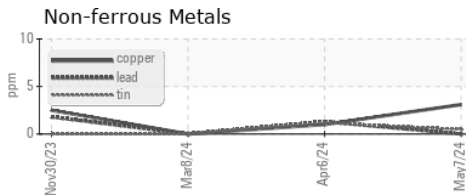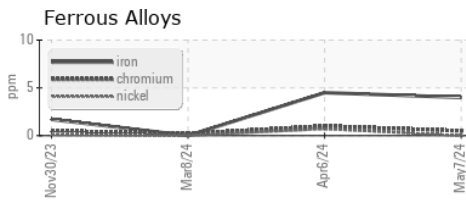

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0206171 **Received** : 13 May 2024
Lab Number : **06177030** **Tested** : 17 May 2024
Unique Number : 11023083 **Diagnosed** : 17 May 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: PQ)

MECKLENBURG COUNTY
 8007 PENCE RD
 CHARLOTTE, NC
 US 28215
 Contact: DOYLE TYSON
 WALTER.TYSON@MECKLENBURGCOUNTYNC.GOV

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (704)587-0748