

Area

**Drills**

Machine Id


**122002**

Component

**1 Left Hydrostatic**

Fluid

**CONOCO MEGAFLOW AW 32 (--- GAL)**

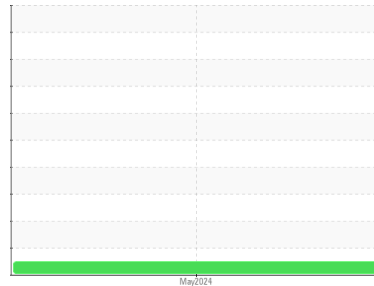

**DIAGNOSIS**

**Recommendation**

Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

**Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

**SAMPLE INFORMATION**

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>KOH0000013</b>	---	---
Sample Date	Client Info	<b>06 May 2024</b>	---	---
Machine Age	hrs Client Info	<b>0</b>	---	---
Oil Age	hrs Client Info	<b>3</b>	---	---
Oil Changed	Client Info	<b>Not Changed</b>	---	---
Sample Status		<b>NORMAL</b>	---	---

**CONTAMINATION**

method	limit/base	current	history1	history2
Water	WC Method >0.1	<b>NEG</b>	---	---

**WEAR METALS**

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >200	<b>0</b>	---	---
Chromium	ppm ASTM D5185m >10	<b>0</b>	---	---
Nickel	ppm ASTM D5185m	<b>0</b>	---	---
Titanium	ppm ASTM D5185m	<b>0</b>	---	---
Silver	ppm ASTM D5185m	<b>0</b>	---	---
Aluminum	ppm ASTM D5185m >50	<b>0</b>	---	---
Lead	ppm ASTM D5185m >50	<b>0</b>	---	---
Copper	ppm ASTM D5185m >200	<b>3</b>	---	---
Tin	ppm ASTM D5185m >10	<b>&lt;1</b>	---	---
Vanadium	ppm ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm ASTM D5185m	<b>0</b>	---	---

**ADDITIVES**

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>0</b>	---	---
Barium	ppm ASTM D5185m 0	<b>0</b>	---	---
Molybdenum	ppm ASTM D5185m 0	<b>0</b>	---	---
Manganese	ppm ASTM D5185m	<b>1</b>	---	---
Magnesium	ppm ASTM D5185m 0	<b>1</b>	---	---
Calcium	ppm ASTM D5185m 80	<b>86</b>	---	---
Phosphorus	ppm ASTM D5185m 365	<b>353</b>	---	---
Zinc	ppm ASTM D5185m 500	<b>466</b>	---	---
Sulfur	ppm ASTM D5185m 1000	<b>1081</b>	---	---

**CONTAMINANTS**

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >50	<b>2</b>	---	---
Sodium	ppm ASTM D5185m	<b>2</b>	---	---
Potassium	ppm ASTM D5185m >20	<b>0</b>	---	---





**FLUID CLEANLINESS**

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >10000	<b>1711</b>	---	---
Particles >6µm	ASTM D7647 >2500	<b>359</b>	---	---
Particles >14µm	ASTM D7647 >320	<b>26</b>	---	---
Particles >21µm	ASTM D7647 >80	<b>7</b>	---	---
Particles >38µm	ASTM D7647 >20	<b>1</b>	---	---
Particles >71µm	ASTM D7647 >4	<b>1</b>	---	---
Oil Cleanliness	ISO 4406 (c) >20/18/15	<b>18/16/12</b>	---	---

**FLUID DEGRADATION**

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045 0.38	<b>0.49</b>	---	---

# OIL ANALYSIS REPORT

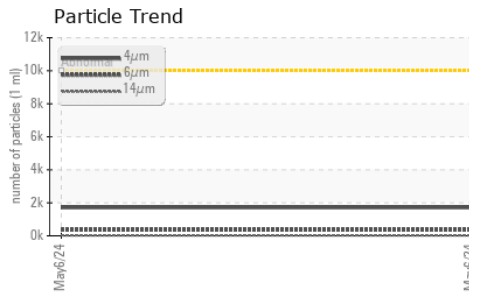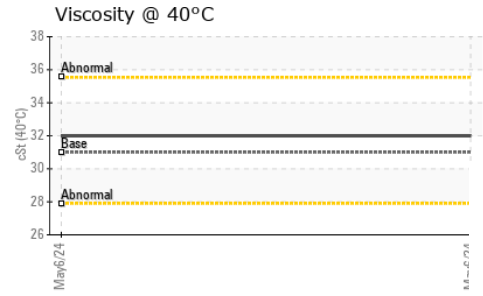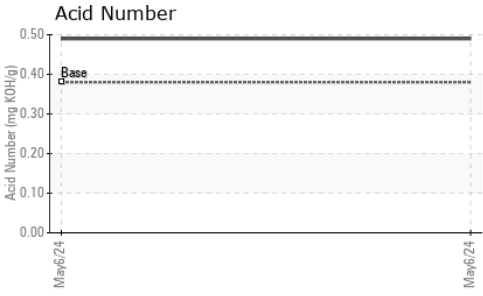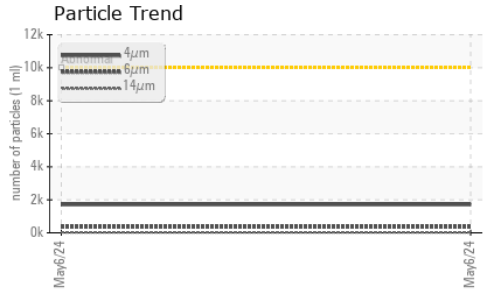





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	31.0	<b>32.0</b>	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

### GRAPHS

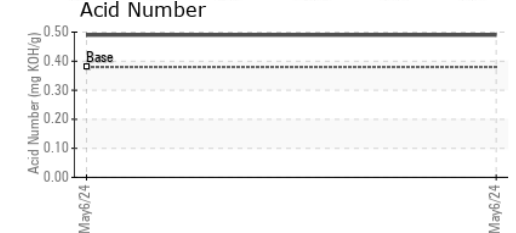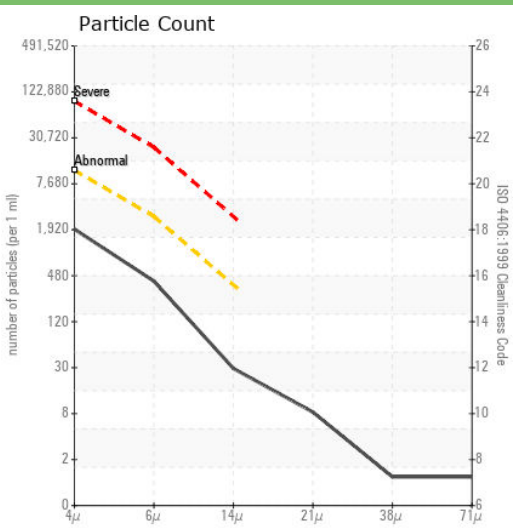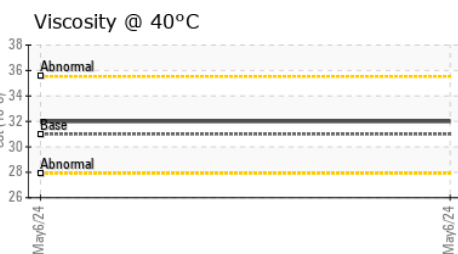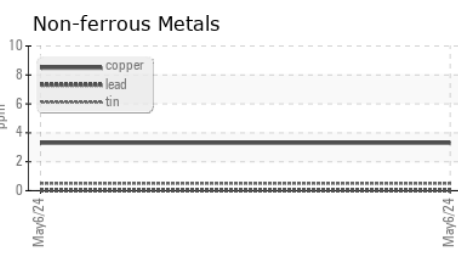

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KOH0000013      **Received** : 13 May 2024  
**Lab Number** : **06177083**      **Tested** : 14 May 2024  
**Unique Number** : 11023136      **Diagnosed** : 14 May 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests : PrtCount )

**KOMATSU HYDRAULICS**  
 401 E GREENFIELD AVENUE  
 MILWAUKEE, WI  
 US 53204-2941  
 Contact: JOHN GATES  
 john.gates@global.komatsu  
 T: (414)670-5932  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)