

OIL ANALYSIS REPORT

Area Drills 122002

Circulating Hydraulic System

CONOCO MEGAFLOW AW 32 (--- GAL)

Sample Rating Trend ISO

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a light amount of silt (particulates < 14 microns in size) present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| | | | | May2024 | | |
|---|--|---|--|---|----------------------------------|------------------------------|
| | | | | | | |
| SAMPLE INFORM | MATION | | | | | history2 |
| Sample Number | | Client Info | | KOH0000018 | | |
| Sample Date | | Client Info | | 06 May 2024 | | |
| Machine Age | hrs | Client Info | | 0 | | |
| Oil Age | hrs | Client Info | | 3 | | |
| Oil Changed | | Client Info | | Not Changd | | |
| Sample Status | | | | ATTENTION | | |
| CONTAMINATION | V | method | limit/base | current | history1 | history2 |
| Water | | WC Method | | NEG | | |
| | | | | | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >20 | 0 | | |
| Chromium | ppm | ASTM D5185m | >10 | 0 | | |
| Nickel | ppm | ASTM D5185m | >10 | 0 | | |
| Titanium | ppm | ASTM D5185m | | 0 | | |
| Silver | ppm | ASTM D5185m | | 0 | | |
| Aluminum | ppm | ASTM D5185m | >10 | 0 | | |
| Lead | ppm | ASTM D5185m | >10 | 0 | | |
| Copper | ppm | ASTM D5185m | >75 | 3 | | |
| Tin | ppm | ASTM D5185m | >10 | <1 | | |
| Vanadium | ppm | ASTM D5185m | | 0 | | |
| Cadmium | ppm | ASTM D5185m | | 0 | | |
| | | | | | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| ADDITIVES Boron | nnm | | | | history1 | history2 |
| Boron | ppm | ASTM D5185m | 0 | 0 | | |
| Boron Barium | ppm | ASTM D5185m ASTM D5185m | 0 | 0 0 | | |
| Boron Barium Molybdenum | ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m | 0 | 0 0 0 | | |
| Boron Barium Molybdenum Manganese | ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 0 0 0 | 0 0 0 1 | | |
| Boron Barium Molybdenum Manganese Magnesium | ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 0 0 0 | 0 0 0 1 | | |
| Boron Barium Molybdenum Manganese Magnesium Calcium | ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 0 0 0 0 | 0 0 0 1 0 59 | | |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus | ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 0 0 0 0 0 80 365 | 0 0 0 1 0 59 348 | | |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc | ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 0 0 0 0 80 365 500 | 0 0 0 1 0 59 348 459 | | |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur | ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 0 0 0 0 80 365 500 1000 | 0 0 0 1 0 59 348 | | |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc | ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 0 0 0 0 80 365 500 | 0 0 0 1 0 59 348 459 | | |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur | ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 0 0 0 0 80 365 500 1000 | 0 0 0 1 0 59 348 459 | | |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS | ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m | 0 0 0 0 80 365 500 1000 limit/base | 0 0 0 1 0 59 348 459 1031 | history1 | history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS | ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m | 0 0 0 0 80 365 500 1000 limit/base | 0 0 0 1 0 59 348 459 1031 current | history 1 | history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium | ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m | 0 0 0 0 80 365 500 1000 limit/base | 0 0 0 1 0 59 348 459 1031 current 2 | | history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium | ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m | 0 0 0 0 80 365 500 1000 limit/base >20 | 0 0 0 1 0 59 348 459 1031 current 2 1 | | history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN | ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m | 0 0 0 0 80 365 500 1000 limit/base >20 | 0 0 0 1 0 59 348 459 1031 current 2 1 0 | history1 history1 | history2 history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm | ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m method ASTM D5185m | 0 0 0 0 80 365 500 1000 limit/base >20 | 0 0 0 1 0 59 348 459 1031 current 2 1 0 | history1 history1 | history2 history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm | ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m method ASTM D5185m | 0 0 0 0 80 365 500 1000 limit/base >20 >20 limit/base >5000 >1300 | 0 0 0 1 0 59 348 459 1031 current 2 1 0 current 6310 2030 | history1 history1 | history2 history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm | ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647 | 0 0 0 0 80 365 500 1000 limit/base >20 >20 limit/base >5000 >1300 >160 | 0 0 0 1 0 59 348 459 1031 current 2 1 0 current 6310 2030 175 | history1 history1 | history2 history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >14µm Particles >21µm | ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m Method ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647 | 0 0 0 0 80 365 500 1000 limit/base >20 >20 limit/base >5000 >1300 >160 >40 | 0 0 0 1 0 59 348 459 1031 current 2 1 0 current 6310 2030 175 46 | history1 history1 | history2 history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >14µm Particles >21µm Particles >38µm | ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 | 0 0 0 0 80 365 500 1000 limit/base >20 >20 limit/base >5000 >1300 >160 >40 >10 | 0 0 0 1 0 59 348 459 1031 current 2 1 0 current 6310 2030 175 46 3 | history1 history1 | history2 history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium FLUID CLEANLIN Particles >4µm Particles >6µm Particles >21µm Particles >38µm Particles >71µm | ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m Method ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 | 0 0 0 0 80 365 500 1000 limit/base >20 >20 limit/base >5000 >1300 >160 >40 >10 | 0 0 0 1 0 59 348 459 1031 current 2 1 0 current 6310 2030 175 46 3 0 | | history2 history2 |



OIL ANALYSIS REPORT

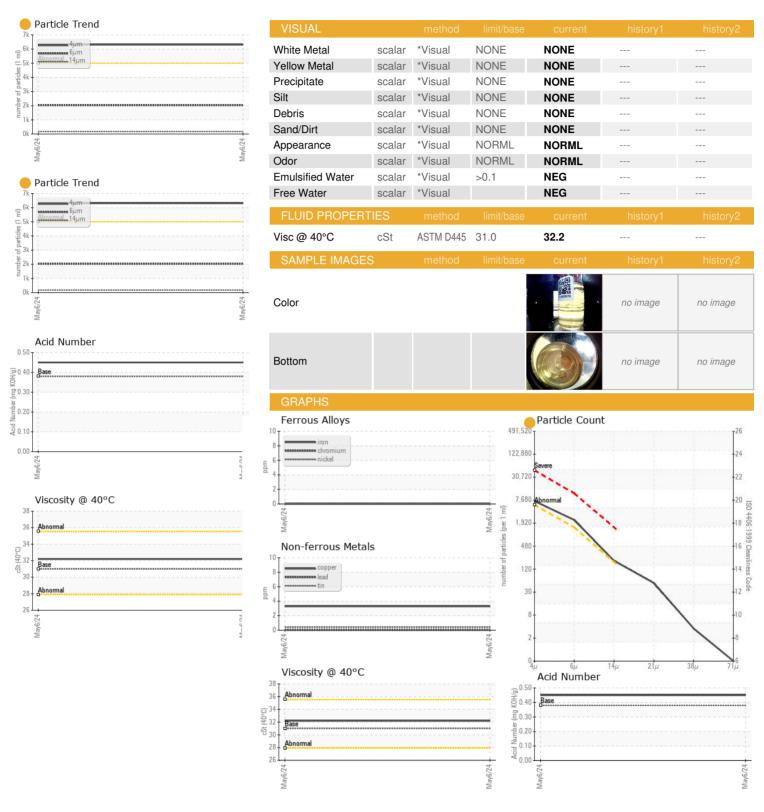





Certificate 12367

Laboratory Sample No.

Lab Number : 06177085 Unique Number : 11023138

: KOH0000018 Test Package : CONST

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 13 May 2024 **Tested** : 14 May 2024

Diagnosed

: 14 May 2024 - Wes Davis To discuss this sample report, contact Customer Service at 1-800-237-1369.

US 53204-2941 Contact: JOHN GATES john.gates@global.komatsu T: (414)670-5932

Submitted By: JOHN GATES

401 E GREENFIELD AVENUE

KOMATSU HYDRAULICS

MILWAUKEE, WI

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)