KOMATSU

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

Area Drills 122002 Component 2 Right Hydrostatic Fluid CONOCO MEGAFLOW AW 32 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	NATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KOH0000014		
Sample Date		Client Info		06 May 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		3		
Oil Changed		Client Info		Not Changd		
Sample Status				NORMAL		
CONTAMINATION	N	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	0		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m		0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>50	0		
Lead	ppm	ASTM D5185m	>50	0		
Copper	ppm	ASTM D5185m	>200	3		
Tin	ppm	ASTM D5185m	>10	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	0	0		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m		1		
Magnesium	ppm	ASTM D5185m	0	0		
Calcium	ppm	ASTM D5185m	80	59		
Phosphorus	ppm	ASTM D5185m	365	360		
Zinc	ppm	ASTM D5185m	500	462		
Sulfur	ppm	ASTM D5185m	1000	1050		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m		2		
Sodium	ppm	ASTM D5185m		1		
Potassium	ppm		>20	0		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	2467		
Particles >6µm		ASTM D7647	>2500	697		
Particles >14µm		ASTM D7647	>320	58		
Particles >21µm		ASTM D7647		15		
Particles >38µm		ASTM D7647	>20	0		
Particles >71µm		ASTM D7647		0		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	18/17/13		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.38	0.46		
-12-14) Pov: 1					Culture itte al Du	


Report Id: KOMMIL [WUSCAR] 06177089 (Generated: 05/14/2024 15:13:14) Rev: 1


Submitted By: JOHN GATES Page 1 of 2




OIL ANALYSIS REPORT

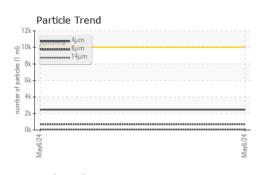



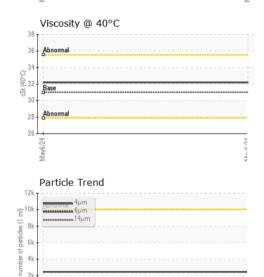

n,

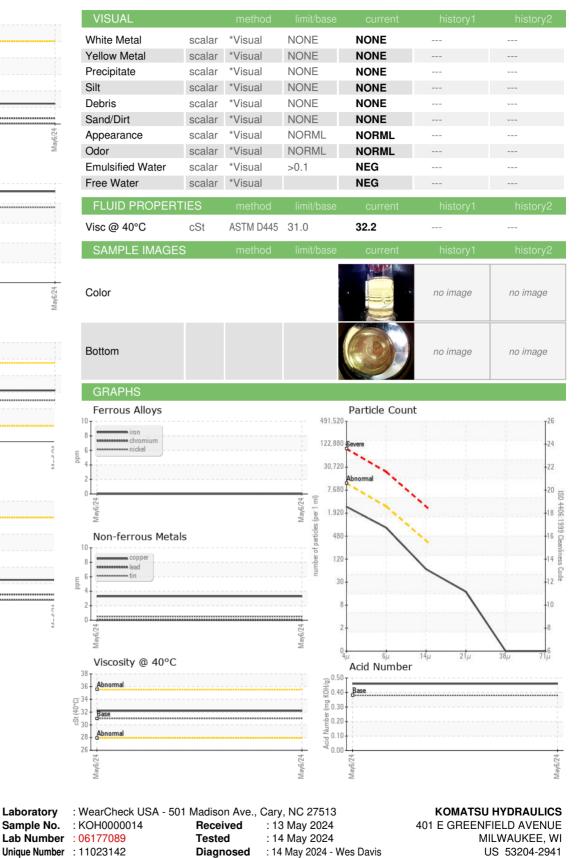

Test Package : CONST (Additional Tests: PrtCount) Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: KOMMIL [WUSCAR] 06177089 (Generated: 05/14/2024 15:13:15) Rev: 1

Laboratory

Sample No.

Submitted By: JOHN GATES

john.gates@global.komatsu

Contact: JOHN GATES

T: (414)670-5932

Page 2 of 2

E: