




# OIL ANALYSIS REPORT

## Sample Rating Trend

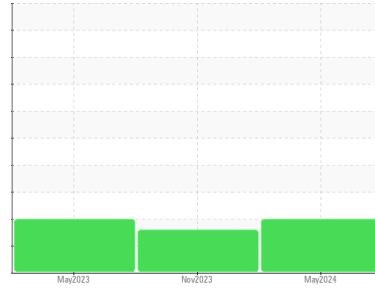

ISO



Machine Id  
**49498**  
 Component  
**Hydraulic System**  
 Fluid  
**SUN 32 (400 GAL)**

### DIAGNOSIS

#### Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PH0001902</b>	PH0000408	PH05857217
Sample Date	Client Info			<b>09 May 2024</b>	08 Nov 2023	08 May 2023
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.05	<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<b>2</b>	2	2
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	<1
Lead	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m	>20	<b>14</b>	12	12
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	0
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	<1
Manganese	ppm	ASTM D5185m		<b>1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>0</b>	0	<1
Calcium	ppm	ASTM D5185m		<b>42</b>	20	44
Phosphorus	ppm	ASTM D5185m		<b>339</b>	309	341
Zinc	ppm	ASTM D5185m		<b>398</b>	389	408
Sulfur	ppm	ASTM D5185m		<b>1025</b>	745	1108

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<b>1</b>	1	<1
Sodium	ppm	ASTM D5185m		<b>2</b>	<1	2
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	<1	0

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>640	<b>▲ 8982</b>	▲ 9086	▲ 10619	
Particles >6µm	ASTM D7647	>80	<b>▲ 2095</b>	▲ 988	▲ 2754	
Particles >14µm	ASTM D7647	>20	<b>▲ 106</b>	● 21	▲ 123	
Particles >21µm	ASTM D7647	>4	<b>▲ 23</b>	5	▲ 13	
Particles >38µm	ASTM D7647	>3	<b>1</b>	1	0	
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	0	
Oil Cleanliness	ISO 4406 (c)	>16/13/11	<b>▲ 20/18/14</b>	▲ 20/17/12	▲ 21/19/14	





FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.469</b>	0.37	0.33

Particle Filter (Magn: 200 x)

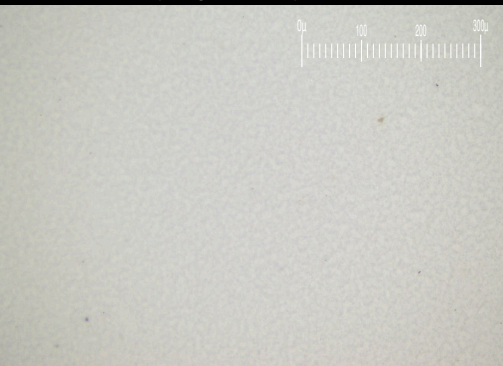




# OIL ANALYSIS REPORT

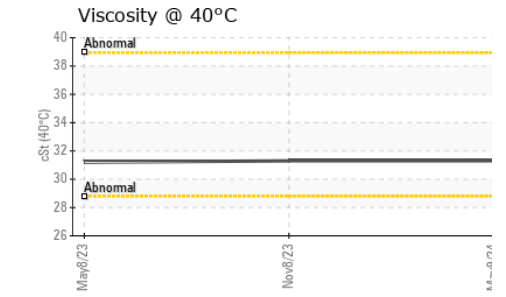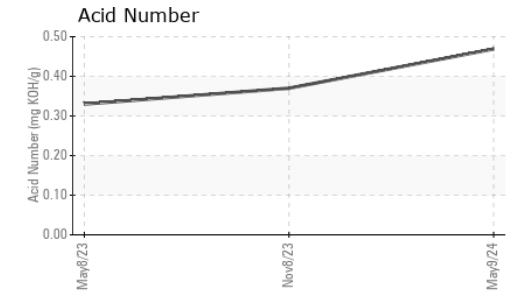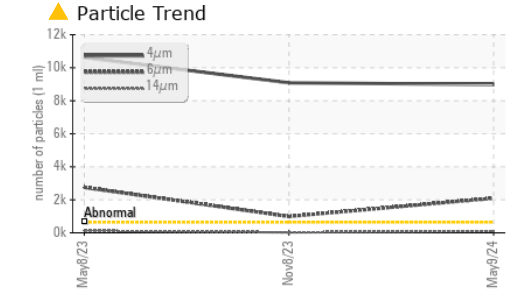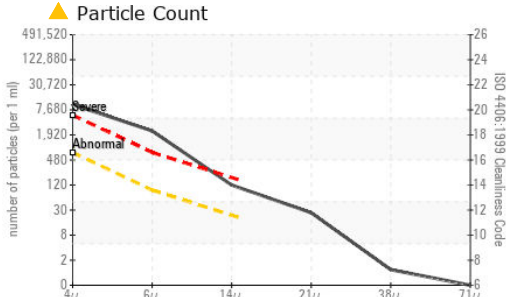






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	31.3	31.3	31.2

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

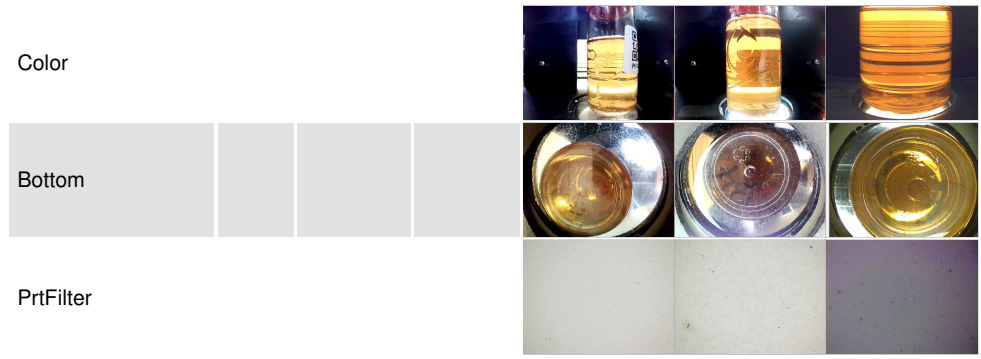

## GRAPHS

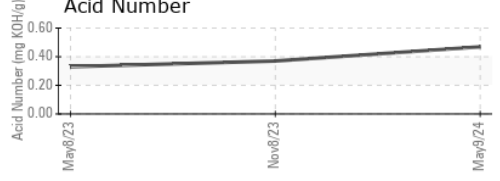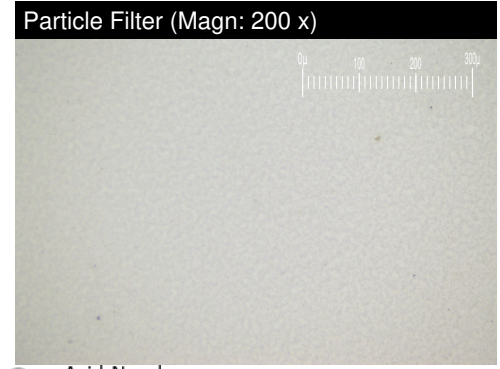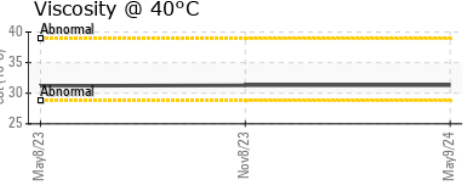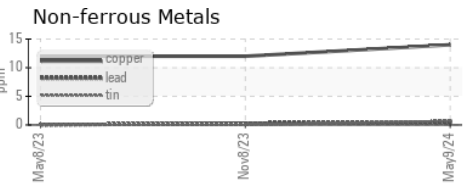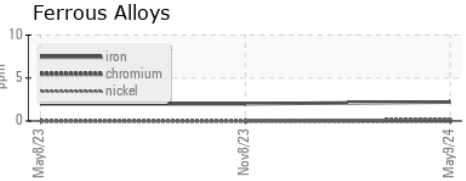

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PH0001902      **Received** : 13 May 2024  
**Lab Number** : 06177101      **Tested** : 16 May 2024  
**Unique Number** : 11023154      **Diagnosed** : 16 May 2024 - Angela Borella  
**Test Package** : PLANT ( Additional Tests: PrtFilter )

**JERSEY SHORE STEEL CO**  
 2800 CANFIELDS LN  
 MONTOURSVILLE, PA  
 US 17754  
 Contact: RICK ZINCK  
 rzinck@jssteel.com  
 T: (570)368-2601  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)