




# OIL ANALYSIS REPORT

## Sample Rating Trend

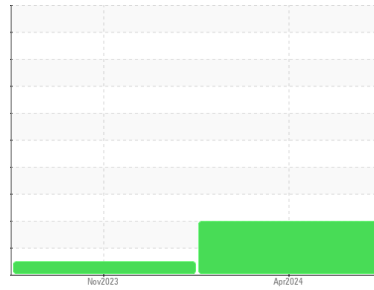

ISO



Machine Id  
**8915962 (S/N 1403)**  
 Component  
**Compressor**  
 Fluid  
**KAESER SIGMA (OEM) S-460 (--- QTS)**

### DIAGNOSIS

#### ▲ Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### ▲ Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KC121865</b>	KC124267	---
Sample Date	Client Info			<b>02 Apr 2024</b>	04 Nov 2023	---
Machine Age	hrs	Client Info		<b>7726</b>	0	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed	Client Info			<b>N/A</b>	N/A	---
Sample Status				<b>ABNORMAL</b>	NORMAL	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>0</b>	0	---
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Nickel	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>10	<b>0</b>	1	---
Lead	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m	>50	<b>13</b>	4	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	---
Barium	ppm	ASTM D5185m	90	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	---
Manganese	ppm	ASTM D5185m		<b>1</b>	0	---
Magnesium	ppm	ASTM D5185m	90	<b>0</b>	8	---
Calcium	ppm	ASTM D5185m	2	<b>0</b>	0	---
Phosphorus	ppm	ASTM D5185m		<b>2</b>	6	---
Zinc	ppm	ASTM D5185m		<b>0</b>	10	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>1</b>	0	---
Sodium	ppm	ASTM D5185m		<b>1</b>	6	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	2	---
Water	%	ASTM D6304	>0.05	<b>0.006</b>	0.008	---
ppm Water	ppm	ASTM D6304	>500	<b>66</b>	82	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>5224</b>	502	---
Particles >6µm		ASTM D7647	>1300	▲ <b>1855</b>	152	---
Particles >14µm		ASTM D7647	>80	▲ <b>306</b>	22	---
Particles >21µm		ASTM D7647	>20	▲ <b>119</b>	8	---
Particles >38µm		ASTM D7647	>4	▲ <b>11</b>	0	---
Particles >71µm		ASTM D7647	>3	<b>1</b>	0	---
Oil Cleanliness		ISO 4406 (c)	>--/17/13	▲ <b>20/18/15</b>	16/14/12	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	<b>0.40</b>	0.33	---


# OIL ANALYSIS REPORT

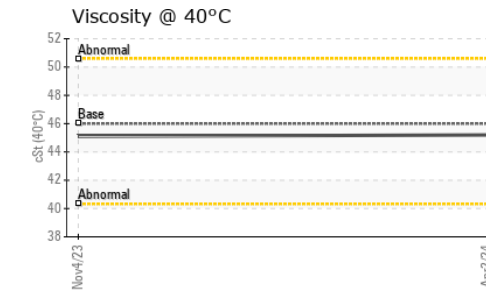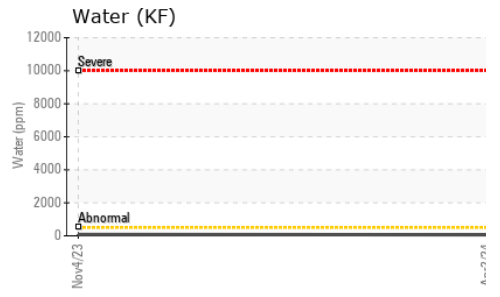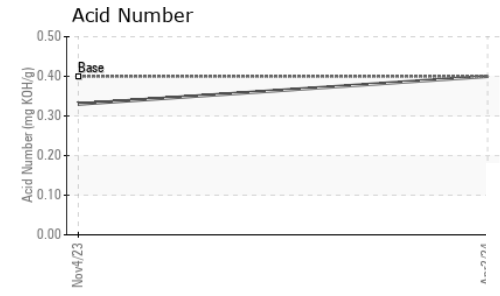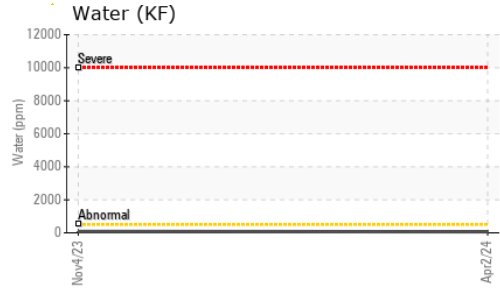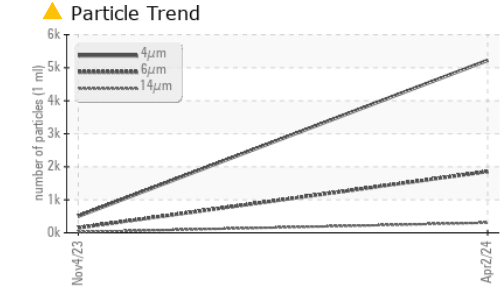






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	45.2	45.1

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

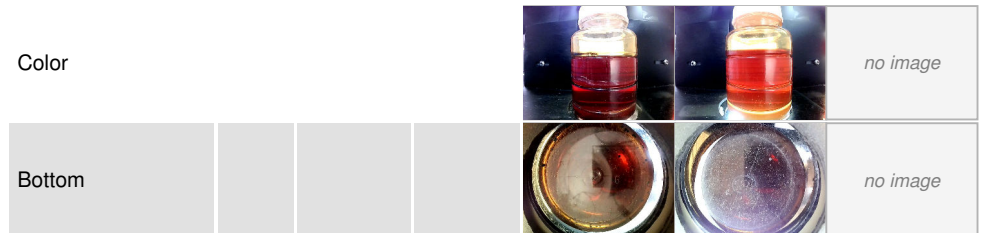

## GRAPHS

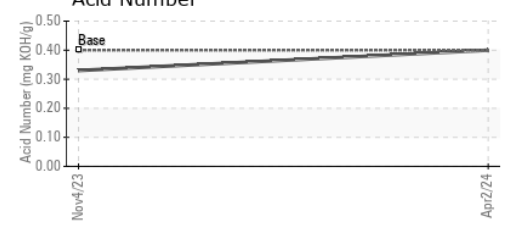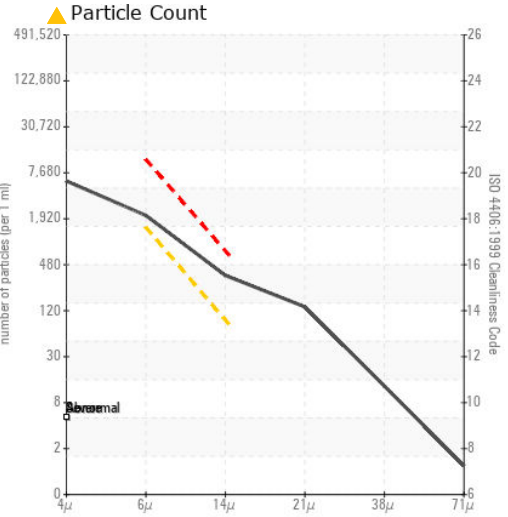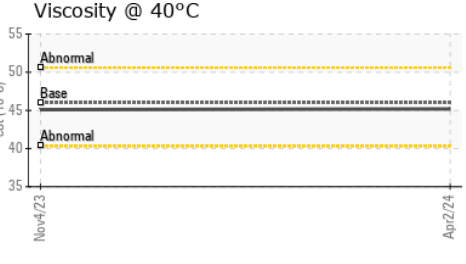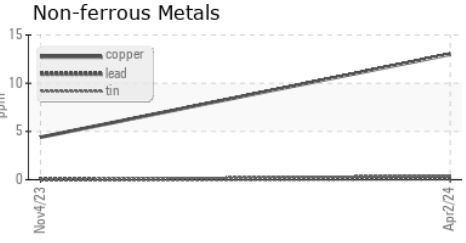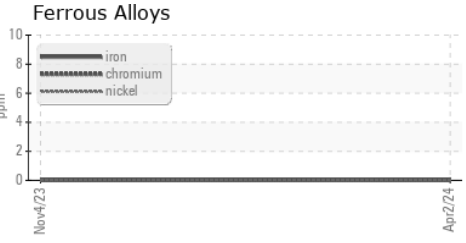

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KC121865  
**Lab Number** : 06177160  
**Unique Number** : 11023213  
**Test Package** : IND 2

**Received** : 13 May 2024  
**Tested** : 21 May 2024  
**Diagnosed** : 21 May 2024 - Jonathan Hester

**METEM - A GE POWER CO**  
 404 UNION BLVD  
 ALLENTOWN, PA  
 US 18109  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)