

OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id

FES TYSROGCNQ 13 (S/N B1402)

Refrigeration Compressor

USPI ALT-68 SC (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		ry2015 Jul201	6 Oct2017 Sep2018	Nov2019 Dec2020 Feb2022 Ma	Ž023 MayŽ0	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0011386	USP0005402	USP0003209
Sample Date		Client Info		06 May 2024	23 Jan 2024	09 Oct 2023
Machine Age	hrs	Client Info		32389	31489	30393
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	0	0	0
Chromium	ppm	ASTM D5185m	>2	<1	0	0
Nickel	ppm	ASTM D5185m		0	<1	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>3	0	<1	<1
Lead	ppm	ASTM D5185m	>2	<1	<1	0
Copper	ppm	ASTM D5185m	>8	<1	0	<1
Tin	ppm	ASTM D5185m	>4	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		1	0	0
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m		<1	0	0
Calcium	ppm	ASTM D5185m		0	1	0
Phosphorus	ppm	ASTM D5185m		0	0	0
Zinc	ppm	ASTM D5185m		2	0	0
Sulfur	ppm	ASTM D5185m	50	0	14	0
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	2	1	<1
Sodium	ppm	ASTM D5185m	0.0	0	<1	<1
Potassium	ppm	ASTM D5185m		1	2	2
Water	%	ASTM D6304		0.008	0.004	0.007
ppm Water	ppm	ASTM D6304		83	45	75.9
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647		703	685	226
Particles >6µm		ASTM D7647		189	139	73
Particles >14µm		ASTM D7647	>320	19	23	10
Particles >21µm		ASTM D7647	>80	4	9	3
Particles >38µm		ASTM D7647	>20	0	1	0
Particles >71μm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/18/15	17/15/11	17/14/12	15/13/10
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974	0.005	0.014	0.015	0.014





OIL ANALYSIS REPORT












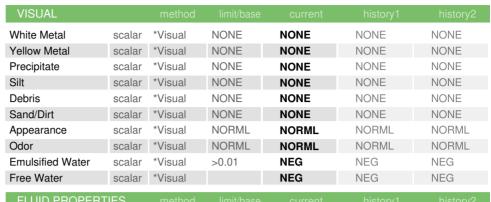


I LOID I HOI LITT	ILO	method			HISTOLAL	Thistory Z
Visc @ 40°C	cSt	ASTM D445	65.6	65.0	64.3	64.9


SAMPI	LE IMAGES

Color

Bottom





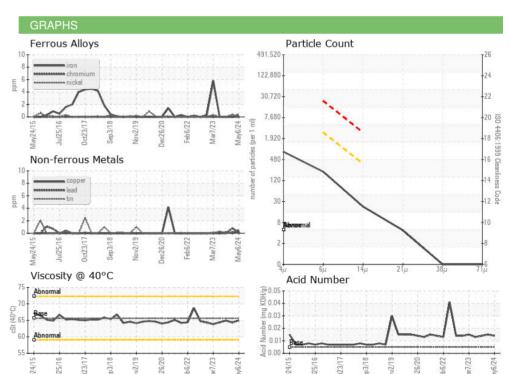

: 14 May 2024 - Doug Bogart





Laboratory Lab Number

Sample No.

: USP0011386 : 06177243 Unique Number : 11023296

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 13 May 2024 **Tested** : 14 May 2024

Diagnosed

TYSON CNQ -ROGERS-USP

ROGERS, AR LIS

Contact: SERVICE MANAGER

Certificate 12367

Test Package : IND 2

To discuss this sample report, contact Customer Service at 1-800-237-1369. st - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: SERVICE MANAGER - TYSROGCNQ

T:

F: