

# **OIL ANALYSIS REPORT**

Sample Rating Trend





## Area **{UNASSIGNED}** [2] **CARRIER** WSU Mott Ch 2 (S/N 1702Q66939) Component Centrifugal Compressor

Fluid CARRIER 68 (3 GAL)

### DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: Routine maintenance )

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


#### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0827234		
Sample Date		Client Info		01 May 2024		
Machine Age	hrs	Client Info		44242		
Oil Age	hrs	Client Info		44242		
Oil Changed		Client Info		Not Changd		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1		
Chromium	ppm	ASTM D5185m		<1		
Nickel	ppm	ASTM D5185m	210	0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum		ASTM D5185m	>25	2		
Lead	ppm	ASTM D5185m	>25	2 <1		
	ppm	ASTM D5185m		<1		
Copper Tin	ppm	ASTM D5185m		5		
Vanadium	ppm	ASTM D5185m	>10	5 <1		
Cadmium	ppm	ASTM D5185m		<1		
	ppm			<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	0	1		
Molybdenum	ppm	ASTM D5185m	0	<1		
Manganese	ppm	ASTM D5185m	0	0		
Magnesium	ppm	ASTM D5185m	0	0		
Calcium	ppm	ASTM D5185m	0	3		
Phosphorus	ppm	ASTM D5185m	1350	1204		
Zinc	ppm	ASTM D5185m	10	2		
Sulfur	ppm	ASTM D5185m	200	0		
CONTAMINANTS	1	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	7		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	2		
Water	%	ASTM D6304	>0.030	0.002		
ppm Water	ppm	ASTM D6304	>300	25		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	1063		
Particles >6µm		ASTM D7647	>2500	245		
Particles >14µm		ASTM D7647	>320	11		
Particles >21µm		ASTM D7647	>80	2		
Particles >38µm		ASTM D7647	>20	0		
Particles >71µm		ASTM D7647	>4	0		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	17/15/11		
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.07	0.026		





# **OIL ANALYSIS REPORT**





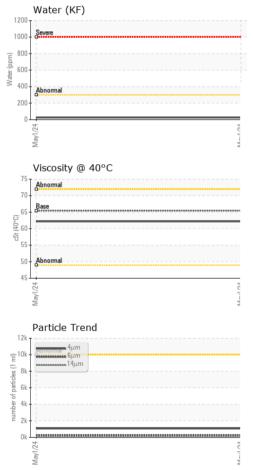

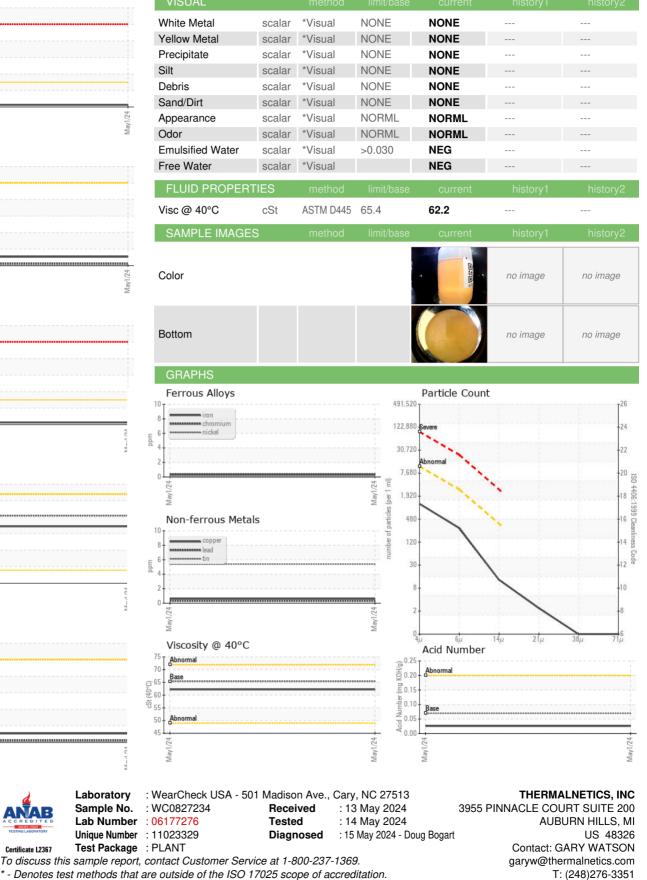



Report Id: THEAUB [WUSCAR] 06177276 (Generated: 05/15/2024 20:33:39) Rev: 1

Certificate 12367

Submitted By: SHELLY MANN

Page 2 of 2

E: