

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

7867954 (S/N 1693)

Component Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA017219		
Sample Date		Client Info		07 May 2024		
Machine Age	hrs	Client Info		5910		
Oil Age	hrs	Client Info		5910		
Oil Changed		Client Info		Changed		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	<1		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	2		
Lead	ppm	ASTM D5185m	>10	<1		
Copper	ppm	ASTM D5185m	>50	8		
Tin	ppm	ASTM D5185m	>10	2		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	90	2		
Molybdenum	ppm	ASTM D5185m	0	- <1		
Manganese	ppm	ASTM D5185m	U	0		
Magnesium	ppm	ASTM D5185m	100	15		
Calcium	ppm	ASTM D5185m	0	4		
Phosphorus	ppm	ASTM D5185m	0	7		
Zinc	ppm	ASTM D5185m	0	10		
Sulfur	ppm	ASTM D5185m	23500	22512		
CONTAMINANTS	le le	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	2		
Sodium	ppm	ASTM D5185m	00	0		
Potassium	ppm	ASTM D5185m	>20	2		
Water	%	ASTM D6304	>0.05	0.009		
ppm Water	ppm	ASTM D6304	>500	99		
	ppm			99 current	 history1	history2
ppm Water FLUID CLEANLIN	ppm	ASTM D6304	>500	99		 history2
ppm Water FLUID CLEANLIN Particles >4µm	ppm	ASTM D6304 method	>500	99 current	 history1	
ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm	ppm	ASTM D6304 method ASTM D7647	>500 limit/base	99 current 11646	 history1 	
ppm Water FLUID CLEANLIN Particles >4μm Particles >6μm Particles >14μm	ppm	ASTM D6304 method ASTM D7647 ASTM D7647	>500 limit/base >1300	99 current 11646 ▲ 2825	 history1 	
ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm	ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647	>500 limit/base >1300 >80	99 current 11646 ▲ 2825 ▲ 144	 history1 	
ppm Water	ppm	ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>500 limit/base >1300 >80 >20 >4	99 current 11646 ▲ 2825 ▲ 144 ▲ 31	 history1 	



OIL ANALYSIS REPORT

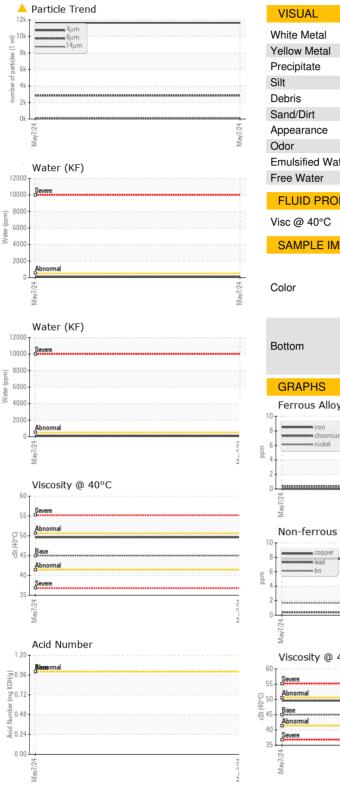

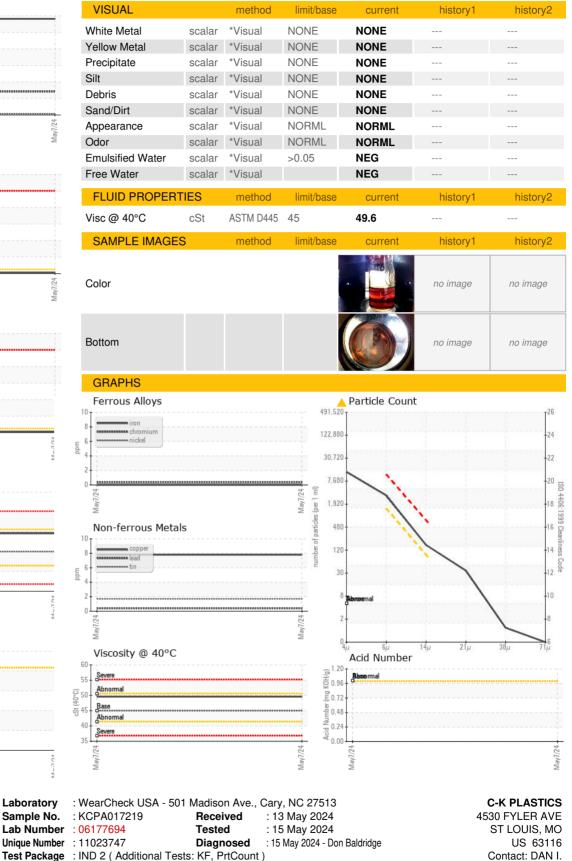

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: CKPSTL [WUSCAR] 06177694 (Generated: 05/15/2024 17:53:50) Rev: 1

Certificate 12367

Laboratory

Sample No.

Contact/Location: DAN I. - CKPSTL Page 2 of 2

dani@ckplastics.com

T:

F: