



# OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id  
**KAESER SM 11 1971040 (S/N 1160)**  
 Component  
**Compressor**  
 Fluid  
**KAESER SIGMA (OEM) M-460 (--- GAL)**

## DIAGNOSIS

### Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>KCP61250</b>	---	---
Sample Date	Client Info	<b>24 Apr 2024</b>	---	---
Machine Age	hrs Client Info	<b>17534</b>	---	---
Oil Age	hrs Client Info	<b>1949</b>	---	---
Oil Changed	Client Info	<b>Changed</b>	---	---
Sample Status		<b>ABNORMAL</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185m	>50	<b>0</b>	---	---
Chromium ppm ASTM D5185m	>10	<b>&lt;1</b>	---	---
Nickel ppm ASTM D5185m	>3	<b>0</b>	---	---
Titanium ppm ASTM D5185m	>3	<b>&lt;1</b>	---	---
Silver ppm ASTM D5185m	>2	<b>0</b>	---	---
Aluminum ppm ASTM D5185m	>10	<b>2</b>	---	---
Lead ppm ASTM D5185m	>10	<b>&lt;1</b>	---	---
Copper ppm ASTM D5185m	>50	<b>8</b>	---	---
Tin ppm ASTM D5185m	>10	<b>&lt;1</b>	---	---
Vanadium ppm ASTM D5185m		<b>&lt;1</b>	---	---
Cadmium ppm ASTM D5185m		<b>&lt;1</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185m	0	<b>0</b>	---	---
Barium ppm ASTM D5185m	90	<b>1</b>	---	---
Molybdenum ppm ASTM D5185m	0	<b>&lt;1</b>	---	---
Manganese ppm ASTM D5185m		<b>0</b>	---	---
Magnesium ppm ASTM D5185m	100	<b>&lt;1</b>	---	---
Calcium ppm ASTM D5185m	0	<b>3</b>	---	---
Phosphorus ppm ASTM D5185m	0	<b>12</b>	---	---
Zinc ppm ASTM D5185m	0	<b>2</b>	---	---
Sulfur ppm ASTM D5185m	23500	<b>21304</b>	---	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185m	>25	<b>&lt;1</b>	---	---
Sodium ppm ASTM D5185m		<b>0</b>	---	---
Potassium ppm ASTM D5185m	>20	<b>2</b>	---	---
Water % ASTM D6304	>0.05	<b>0.006</b>	---	---
ppm Water ppm ASTM D6304	>500	<b>66</b>	---	---






## FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm ASTM D7647		<b>7618</b>	---	---
Particles >6µm ASTM D7647	>1300	<b>▲ 3291</b>	---	---
Particles >14µm ASTM D7647	>80	<b>▲ 528</b>	---	---
Particles >21µm ASTM D7647	>20	<b>▲ 146</b>	---	---
Particles >38µm ASTM D7647	>4	<b>3</b>	---	---
Particles >71µm ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness ISO 4406 (c)	>--/17/13	<b>▲ 20/19/16</b>	---	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g ASTM D8045	1.0	<b>0.49</b>	---	---


# OIL ANALYSIS REPORT

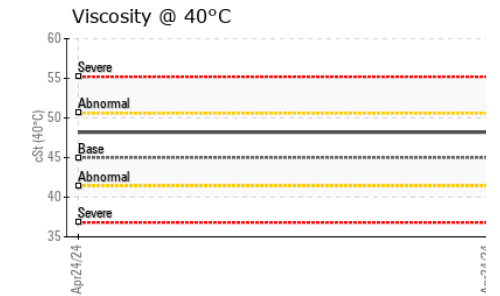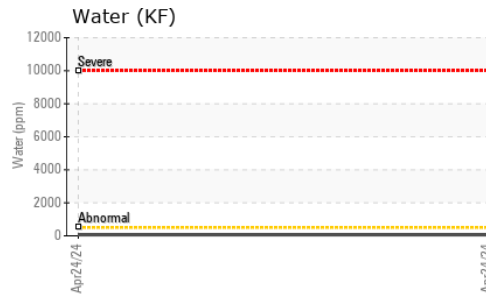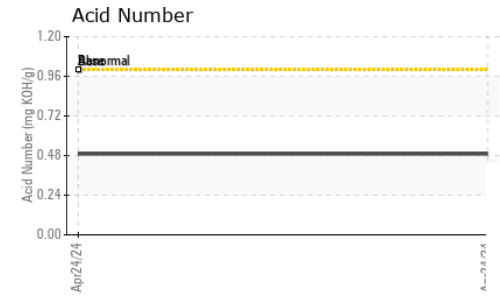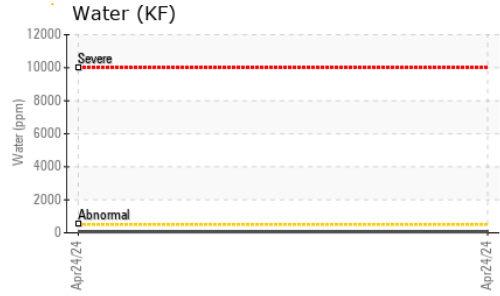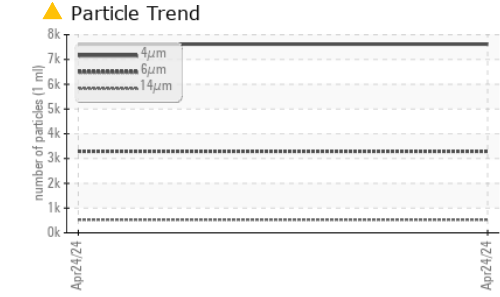





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>LIGHT</b>	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---
Emulsified Water	scalar	*Visual	>0.05	<b>NEG</b>	---
Free Water	scalar	*Visual		<b>NEG</b>	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	<b>48.2</b>	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

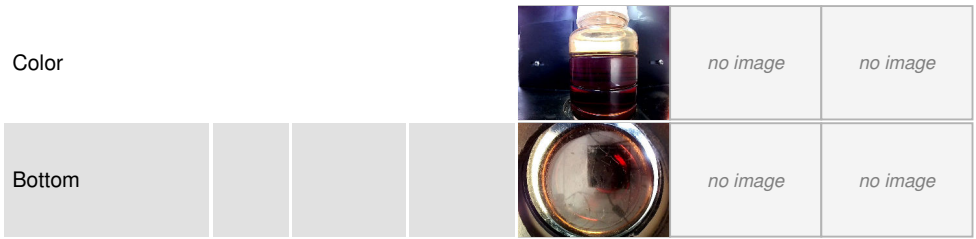

## GRAPHS

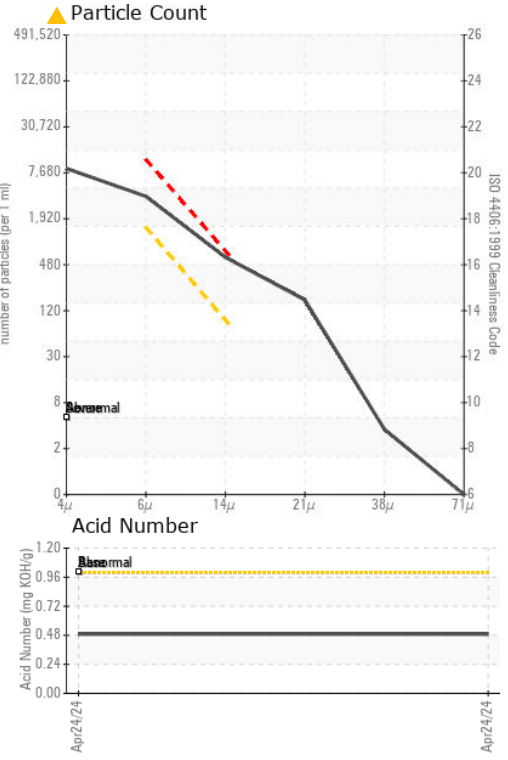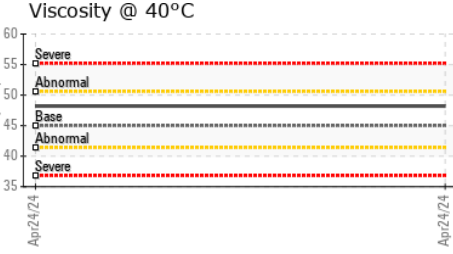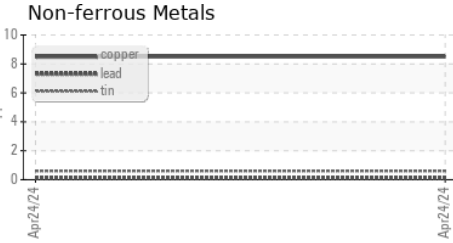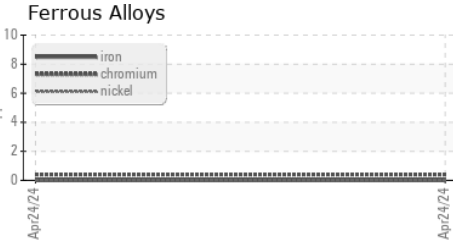

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KCP61250 **Received** : 13 May 2024  
**Lab Number** : 06177726 **Tested** : 14 May 2024  
**Unique Number** : 11023779 **Diagnosed** : 15 May 2024 - Angela Borella  
**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )

**BOSTON BOATWORKS**  
 333 TERMINAL ST  
 CHARLESTOWN, MA  
 US 02129  
 Contact: Service Manager  
 skrivelon@bostonboatworks.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)