


OIL ANALYSIS REPORT



Machine Id
CATERPILLAR 980M 6161 (S/N MK210767)
Component
Diesel Engine
Fluid
TULCO LUBSOIL CK-4 15W40 (--- GAL)

Sample Rating Trend

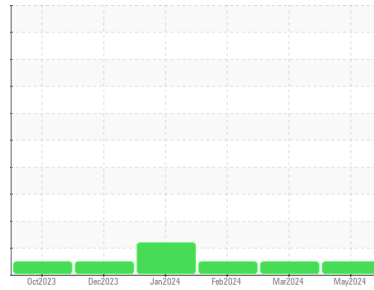

NORMAL

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			TO10002059	TO10003352	TO10003123
Sample Date	Client Info			08 May 2024	31 Mar 2024	24 Feb 2024
Machine Age	hrs	Client Info		9857	9552	9267
Oil Age	hrs	Client Info		305	562	277
Oil Changed	Client Info			Not Chngd	Changed	Not Chngd
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	6	19	5
Chromium	ppm	ASTM D5185m	>20	<1	<1	0
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m	>2	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>25	<1	<1	2
Lead	ppm	ASTM D5185m	>40	0	<1	<1
Copper	ppm	ASTM D5185m	>330	1	4	2
Tin	ppm	ASTM D5185m	>15	<1	<1	1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		4	5	6
Barium	ppm	ASTM D5185m		1	0	0
Molybdenum	ppm	ASTM D5185m	65	61	66	61
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	1060	944	987	927
Calcium	ppm	ASTM D5185m	1140	1099	1118	1063
Phosphorus	ppm	ASTM D5185m	1170	1132	1096	1050
Zinc	ppm	ASTM D5185m	1230	1272	1320	1285
Sulfur	ppm	ASTM D5185m	3130	3979	3488	3287


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	3	3	3
Sodium	ppm	ASTM D5185m		10	24	14
Potassium	ppm	ASTM D5185m	>20	2	4	4

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.2	0.4	0.2
Nitration	Abs/cm	*ASTM D7624	>20	9.5	12.0	8.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.1	23.4	20.5


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.2	22.3	17.1
Base Number (BN)	mg KOH/g	ASTM D2896	10.8	10.27	8.55	10.20

OIL ANALYSIS REPORT


FT-IR (Direct Trend)

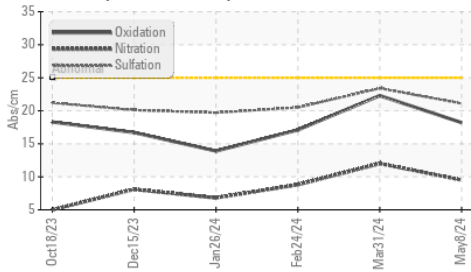


Viscosity @ 40°C

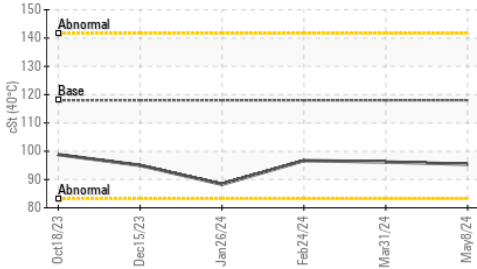

Viscosity @ 100°C

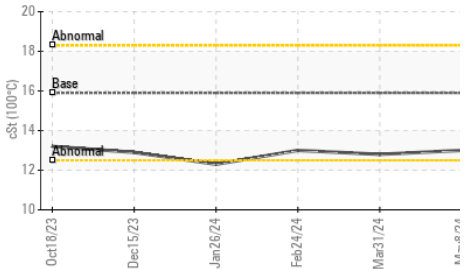

Viscosity @ 40°C

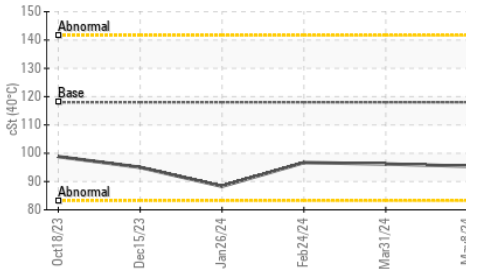


Viscosity @ 100°C



VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	118	95.4	96.2
Visc @ 100°C	cSt	ASTM D445	15.9	13.0	12.8
Viscosity Index (VI)	Scale	ASTM D2270	143	133	129

GRAPHS

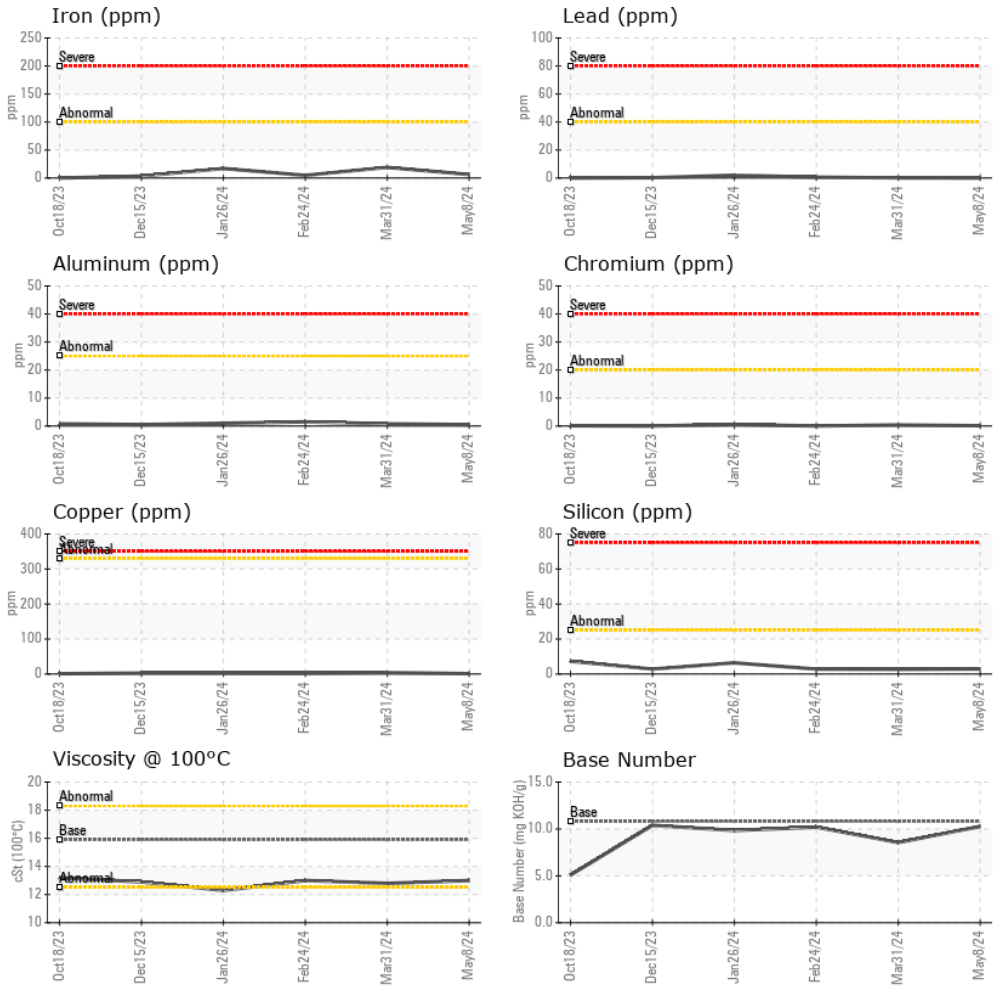

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO10002059 **Received** : 13 May 2024
Lab Number : 06177873 **Tested** : 14 May 2024
Unique Number : 11029199 **Diagnosed** : 14 May 2024 - Wes Davis
Test Package : MOB 2 (Additional Tests: KV40, VI)

ANCHOR STONE TULSA ROCK
 TULSA ROCK QUARRY, 66TH ST N 145TH AVENUE
 TULSA, OK
 US 74137
 Contact: SKIP SAENGERHAUSEN
 skip@anchorstoneco.com
 T: (918)928-4575
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)