


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

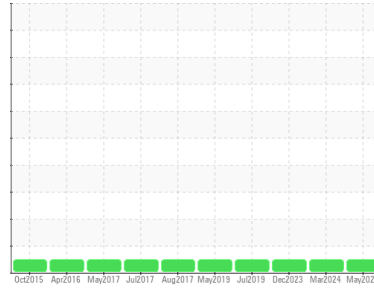

Area
DE Samples - CAT LAB
 Machine Id
KOMATSU 605 HAUL TRUCK 6524 (S/N 10126)
 Component
Diesel Engine
 Fluid
TULCO LUBSOIL CK-4 15W40 (--- GAL)

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			TO10002061	TO10003358	TO10002835
Sample Date	Client Info			08 May 2024	22 Mar 2024	04 Dec 2023
Machine Age	hrs Client Info			33163	32318	32318
Oil Age	hrs Client Info			294	574	496
Oil Changed	Client Info			Not Chngd	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	1	10	9
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	<1	0
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	<1	2	<1
Lead	ppm	ASTM D5185m	>40	<1	3	2
Copper	ppm	ASTM D5185m	>330	0	<1	1
Tin	ppm	ASTM D5185m	>15	<1	<1	0
Antimony	ppm	ASTM D5185m		---	---	---
Vanadium	ppm	ASTM D5185m		0	<1	<1
Cadmium	ppm	ASTM D5185m		0	<1	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		6	9	14
Barium	ppm	ASTM D5185m		1	0	0
Molybdenum	ppm	ASTM D5185m	65	58	64	60
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	1060	938	987	951
Calcium	ppm	ASTM D5185m	1140	1105	1182	1113
Phosphorus	ppm	ASTM D5185m	1170	1134	1120	938
Zinc	ppm	ASTM D5185m	1230	1252	1292	1300
Sulfur	ppm	ASTM D5185m	3130	4024	3822	3576


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	3	4	3
Sodium	ppm	ASTM D5185m		0	0	<1
Potassium	ppm	ASTM D5185m	>20	<1	2	0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.5	0.7	0.7
Nitration	Abs/cm	*ASTM D7624	>20	5.9	6.7	6.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.2	20.0	19.9


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.7	14.4	14.2
Base Number (BN)	mg KOH/g	ASTM D2896	10.8	10.41	10.23	10.07

OIL ANALYSIS REPORT


FT-IR (Direct Trend)

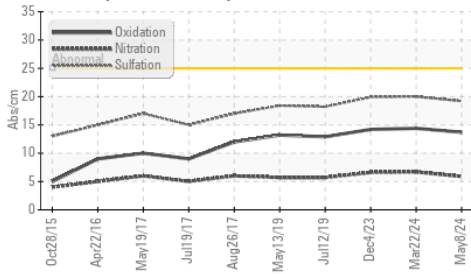


Viscosity @ 40°C

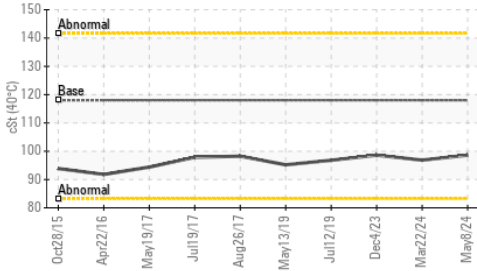

Viscosity @ 100°C

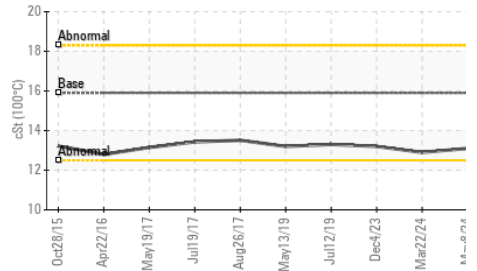

Viscosity @ 40°C

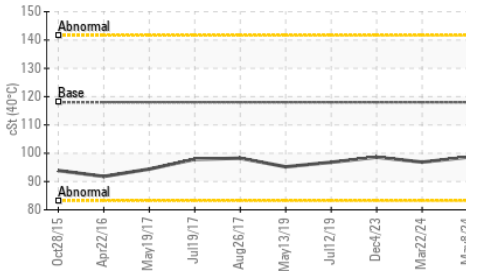

Viscosity @ 100°C




VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	118	98.6	96.85
Visc @ 100°C	cSt	ASTM D445	15.9	13.1	12.9
Viscosity Index (VI)	Scale	ASTM D2270	143	130	129

GRAPHS


Iron (ppm)

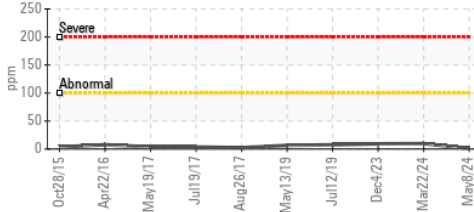


Lead (ppm)

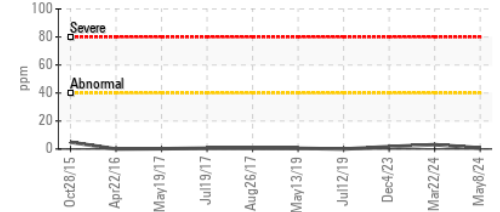


Aluminum (ppm)

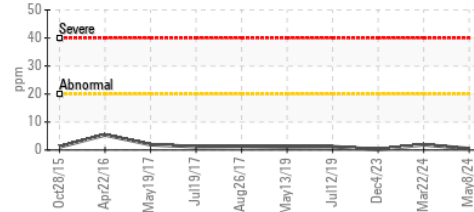


Chromium (ppm)

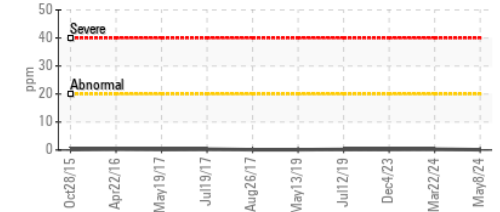


Copper (ppm)

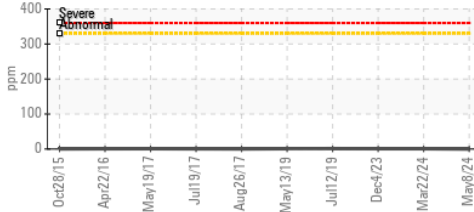


Silicon (ppm)

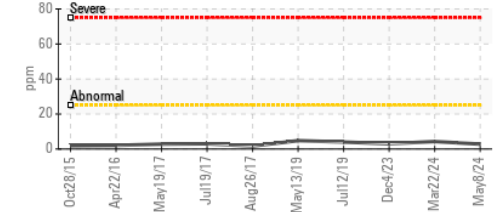

Viscosity @ 100°C

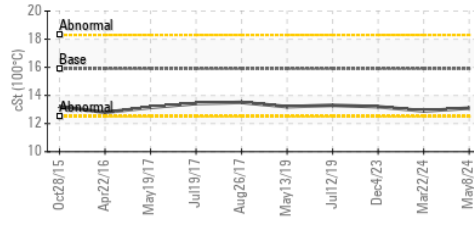

Base Number

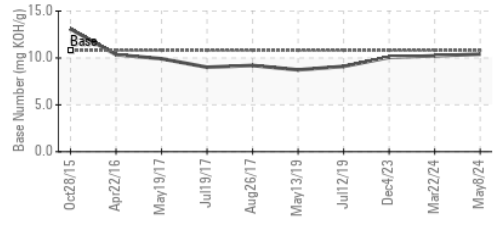

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO10002061
Lab Number : 06177874
Unique Number : 11029200
Test Package : MOB 2 (Additional Tests: KV40, VI)

Received : 13 May 2024

Tested : 14 May 2024

Diagnosed : 14 May 2024 - Wes Davis

ANCHOR STONE TULSA ROCK

TULSA ROCK QUARRY, 66TH ST N 145TH AVENUE

TULSA, OK

US 74137

Contact: DAVID MORRIS

dorris@anchorstoneco.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)