




OIL ANALYSIS REPORT

Area
CONSTRUCTORS, INC
 Machine Id
1717
 Component
Right Conveyor
 Fluid
MOBIL MOBILUBE HD 85W140 (--- GAL)

Sample Rating Trend

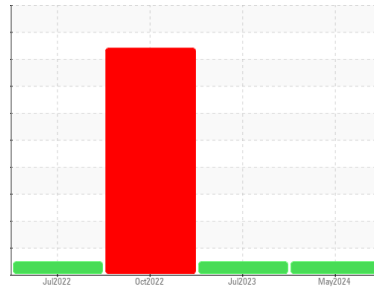

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		SBP0007160	SBP0004549	SBP0002078
Sample Date	Client Info		09 May 2024	14 Jul 2023	10 Oct 2022
Machine Age	hrs	Client Info	9370	8806	7957
Oil Age	hrs	Client Info	564	849	624
Oil Changed	Client Info		N/A	N/A	Changed
Sample Status			NORMAL	NORMAL	SEVERE

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >150	36	39	▲ 1793
Chromium	ppm	ASTM D5185m >10	<1	<1	▲ 18
Nickel	ppm	ASTM D5185m >10	0	0	0
Titanium	ppm	ASTM D5185m	0	0	<1
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >25	0	<1	6
Lead	ppm	ASTM D5185m >100	0	0	<1
Copper	ppm	ASTM D5185m >50	0	<1	3
Tin	ppm	ASTM D5185m >10	<1	0	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	203	193	241
Barium	ppm	ASTM D5185m	1	0	1
Molybdenum	ppm	ASTM D5185m	0	3	12
Manganese	ppm	ASTM D5185m	<1	<1	13
Magnesium	ppm	ASTM D5185m	0	2	2
Calcium	ppm	ASTM D5185m	18	67	59
Phosphorus	ppm	ASTM D5185m	1120	1021	864
Zinc	ppm	ASTM D5185m	8	42	28
Sulfur	ppm	ASTM D5185m	34264	30208	22550

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	10	4	32
Sodium	ppm	ASTM D5185m	<1	0	0
Potassium	ppm	ASTM D5185m >20	0	<1	3

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	NONE	NONE
Debris	scalar	*Visual NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >0.1	NEG	NEG	▲ 0.2%
Free Water	scalar	*Visual	NEG	NEG	NEG



OIL ANALYSIS REPORT

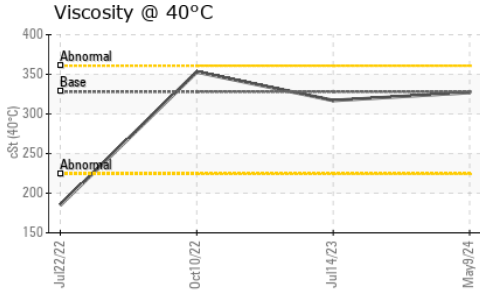





FLUID PROPERTIES	method	limit/base	current	history1	history2
------------------	--------	------------	---------	----------	----------

Visc @ 40°C	cSt	ASTM D445	328	327	317	353
-------------	-----	-----------	-----	------------	-----	-----

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color			no image	no image	no image
Bottom			no image	no image	no image

GRAPHS

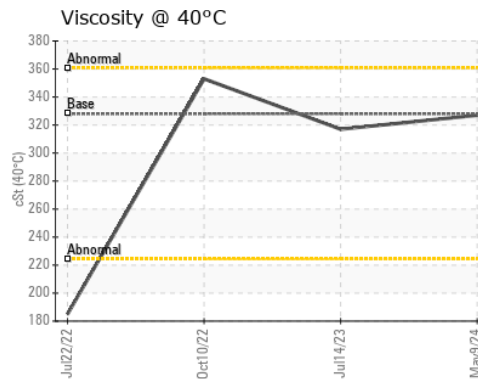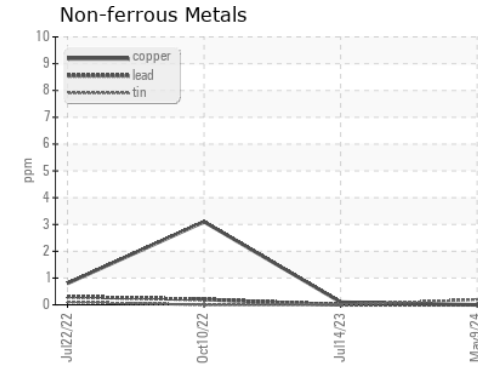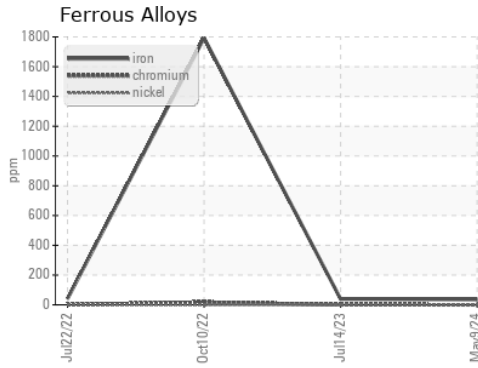

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : SBP0007160 **Received** : 13 May 2024
Lab Number : 06177942 **Tested** : 14 May 2024
Unique Number : 11029268 **Diagnosed** : 15 May 2024 - Sean Felton
Test Package : FLEET

Constructors Inc. - 603659
 1815 Y Street
 Lincoln, NE
 US 68508
 Contact: Loren Michael
 LorenM@constructorslincoln.com
 T: (402)434-2157
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)