




# OIL ANALYSIS REPORT

Sample Rating Trend

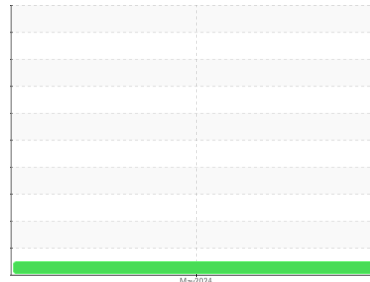

**NORMAL**



Machine Id  
**1467**  
 Component  
**Front Differential**  
 Fluid  
**GEAR OIL SAE 75W90 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: 75 90 gear oil front diff )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0858146</b>	---	---
Sample Date	Client Info			<b>10 May 2024</b>	---	---
Machine Age	hrs	Client Info		<b>12847</b>	---	---
Oil Age	hrs	Client Info		<b>3300</b>	---	---
Oil Changed	Client Info			<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>.2	<b>NEG</b>	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>1200	<b>741</b>	---	---
Chromium	ppm	ASTM D5185m	>8	<b>4</b>	---	---
Nickel	ppm	ASTM D5185m	>20	<b>33</b>	---	---
Titanium	ppm	ASTM D5185m	>4	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>30	<b>2</b>	---	---
Lead	ppm	ASTM D5185m	>25	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m	>50	<b>3</b>	---	---
Tin	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---





ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	400	<b>74</b>	---	---
Barium	ppm	ASTM D5185m	200	<b>2</b>	---	---
Molybdenum	ppm	ASTM D5185m	12	<b>2</b>	---	---
Manganese	ppm	ASTM D5185m		<b>8</b>	---	---
Magnesium	ppm	ASTM D5185m	12	<b>11</b>	---	---
Calcium	ppm	ASTM D5185m	150	<b>23</b>	---	---
Phosphorus	ppm	ASTM D5185m	1650	<b>925</b>	---	---
Zinc	ppm	ASTM D5185m	125	<b>50</b>	---	---
Sulfur	ppm	ASTM D5185m	22500	<b>26150</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>230	<b>118</b>	---	---
Sodium	ppm	ASTM D5185m		<b>6</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>5</b>	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	---	---
Free Water	scalar	*Visual		<b>NEG</b>	---	---







# OIL ANALYSIS REPORT

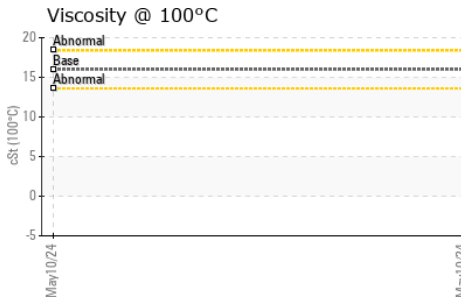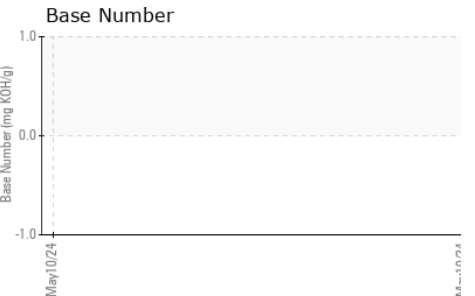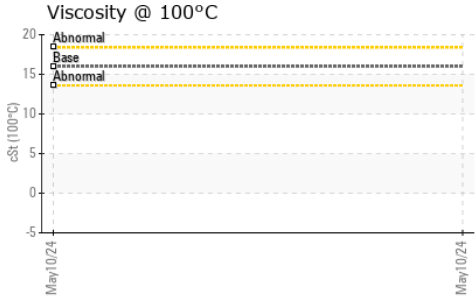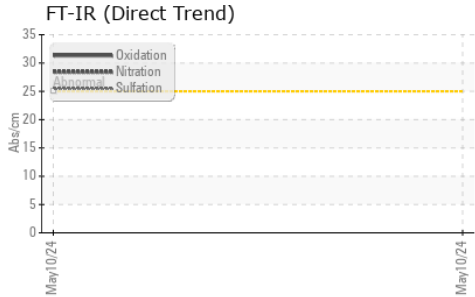

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	109	<b>97.49</b>	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2	
Color				no image	no image	no image
Bottom				no image	no image	no image

## GRAPHS

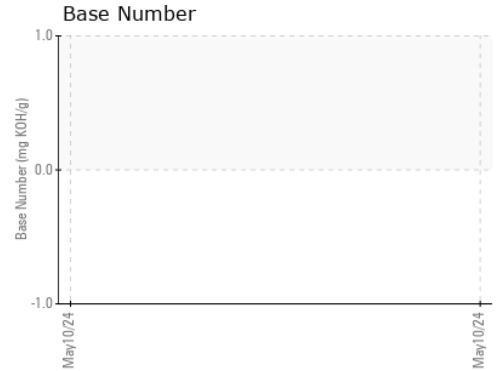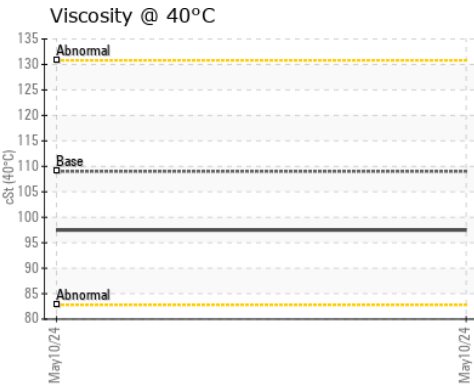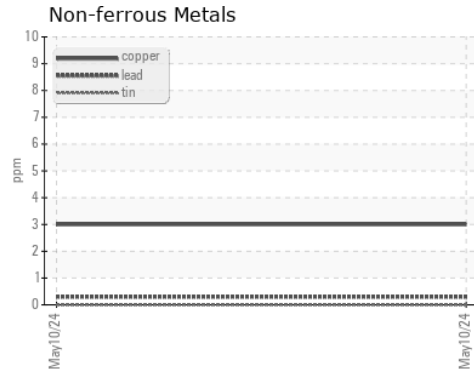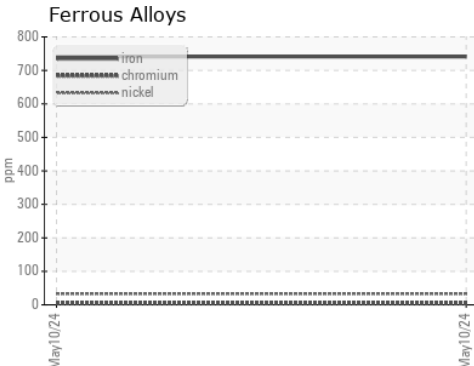

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0858146      **Received** : 13 May 2024  
**Lab Number** : **06178055**      **Tested** : 16 May 2024  
**Unique Number** : 11029381      **Diagnosed** : 17 May 2024 - Jonathan Hester  
**Test Package** : CONST ( Additional Tests: FT-IR, KV100, TBN )

**Apple Valley Waste - Hometown Location**  
 155 Airport Road  
 Selinsgrove, PA  
 US 17870  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: