




OIL ANALYSIS REPORT

Sample Rating Trend

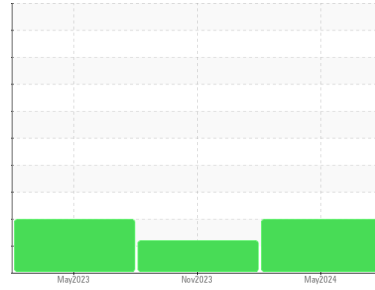

ISO



Machine Id
42981
 Component
Hydraulic System
 Fluid
SUN 32 (175 GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PH0001903	PH0000415	PH05857213
Sample Date	Client Info			09 May 2024	08 Nov 2023	08 May 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed	Client Info			N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.05	NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0	0	<1
Chromium	ppm	ASTM D5185m	>20	<1	0	0
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	0	0	<1
Lead	ppm	ASTM D5185m	>20	0	0	0
Copper	ppm	ASTM D5185m	>20	0	<1	0
Tin	ppm	ASTM D5185m	>20	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		3	3	4
Barium	ppm	ASTM D5185m		1	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	1
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m		6	0	5
Calcium	ppm	ASTM D5185m		57	35	59
Phosphorus	ppm	ASTM D5185m		344	313	346
Zinc	ppm	ASTM D5185m		425	423	437
Sulfur	ppm	ASTM D5185m		839	726	981

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0	<1	0
Sodium	ppm	ASTM D5185m		<1	<1	1
Potassium	ppm	ASTM D5185m	>20	0	<1	0

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>640	▲ 11607	▲ 4330	▲ 10019	
Particles >6µm	ASTM D7647	>80	▲ 1859	▲ 683	▲ 2303	
Particles >14µm	ASTM D7647	>20	▲ 86	16	▲ 60	
Particles >21µm	ASTM D7647	>4	▲ 23	4	▲ 5	
Particles >38µm	ASTM D7647	>3	1	1	0	
Particles >71µm	ASTM D7647	>3	0	0	0	
Oil Cleanliness	ISO 4406 (c)	>16/13/11	▲ 21/18/14	▲ 19/17/11	▲ 21/18/13	





FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.40	0.37	0.35

Particle Filter (Magn: 200 x)

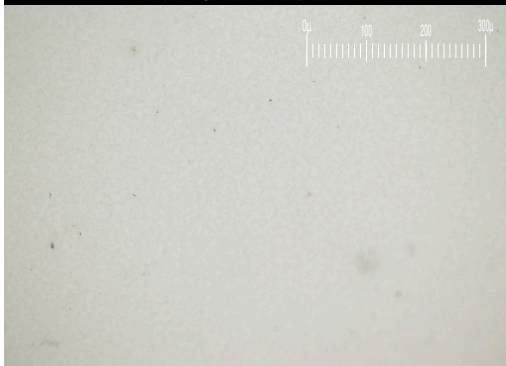



OIL ANALYSIS REPORT

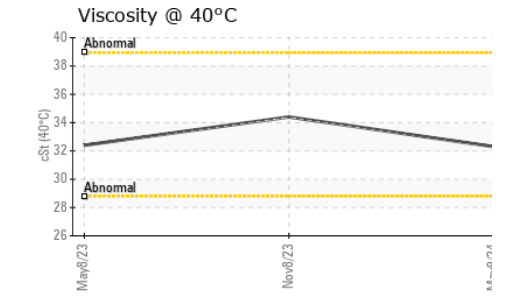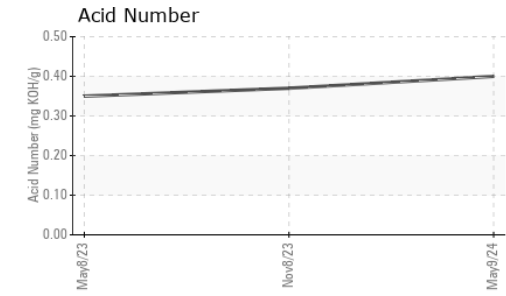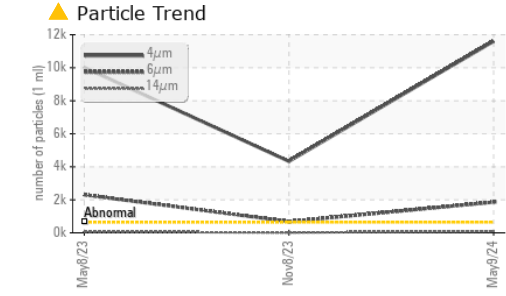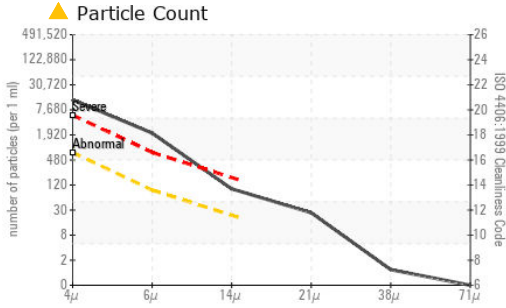

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PH0001903 **Received** : 14 May 2024
Lab Number : **06178668** **Tested** : 16 May 2024
Unique Number : 11029994 **Diagnosed** : 16 May 2024 - Angela Borella
Test Package : PLANT (Additional Tests: PrtFilter)


JERSEY SHORE STEEL CO
 2800 CANFIELDS LN
 MONTOURSVILLE, PA
 US 17754
 Contact: RICK ZINCK
 rzinck@jssteel.com
 T: (570)368-2601
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	32.3	34.4	32.4

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

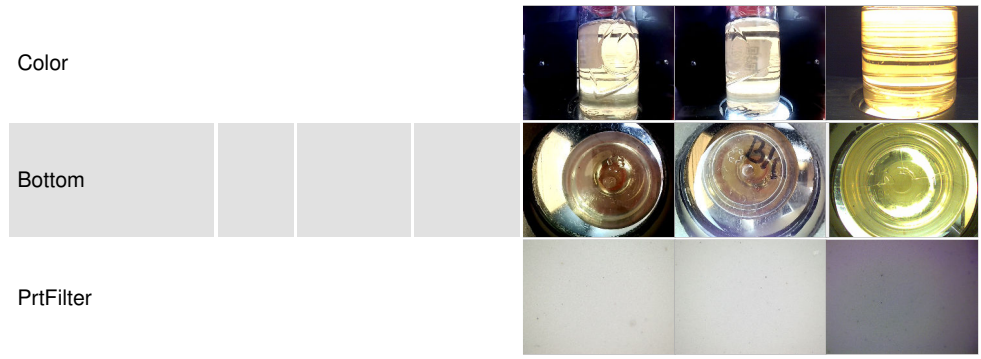

GRAPHS

