




# OIL ANALYSIS REPORT



Machine Id  
**CATERPILLAR D10T 15105050 (S/N CATOD10TCRJG01497)**  
 Component  
**Right Final Drive**  
 Fluid  
**CHEVRON 50WT (--- GAL)**

### Sample Rating Trend

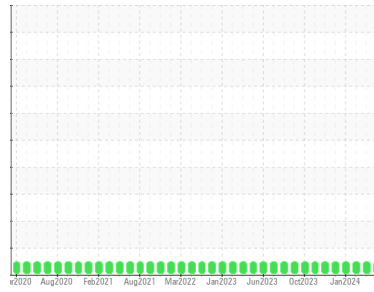

### DIAGNOSIS

**Recommendation**  
 Resample at the next service interval to monitor.  
 NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

**Wear**  
 All component wear rates are normal.

**Contamination**  
 The water content is negligible. There is no indication of any contamination in the oil.

**Fluid Condition**  
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>RP0036876</b>	RP0036961	RP0037016
Sample Date	Client Info		<b>09 May 2024</b>	12 Apr 2024	14 Feb 2024
Machine Age	hrs	Client Info	<b>77687</b>	77404	77070
Oil Age	hrs	Client Info	<b>2276</b>	1993	1659
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >800	<b>26</b>	19	9
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >75	<b>2</b>	1	2
Lead	ppm	ASTM D5185m >10	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >75	<b>2</b>	4	<1
Tin	ppm	ASTM D5185m >8	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>&lt;1</b>	1	1
Barium	ppm	ASTM D5185m	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m	<b>4</b>	4	3
Manganese	ppm	ASTM D5185m	<b>0</b>	2	0
Magnesium	ppm	ASTM D5185m	<b>17</b>	18	18
Calcium	ppm	ASTM D5185m	<b>3498</b>	3578	3434
Phosphorus	ppm	ASTM D5185m	<b>1043</b>	931	894
Zinc	ppm	ASTM D5185m	<b>1192</b>	1094	1105

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >400	<b>18</b>	16	18
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	1	0
Potassium	ppm	ASTM D5185m >20	<b>3</b>	0	2
Water	%	ASTM D6304 >0.2	<b>0.065</b>	0.063	0.040
ppm Water	ppm	ASTM D6304 >2000	<b>659</b>	637	401




### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>1.20</b>	1.22	1.05

### VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG

# OIL ANALYSIS REPORT


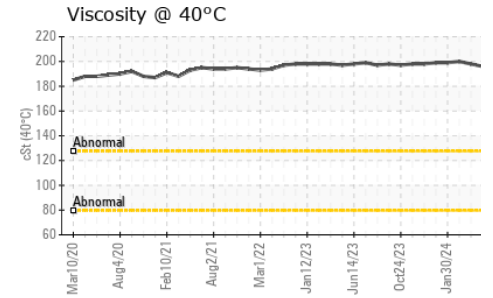
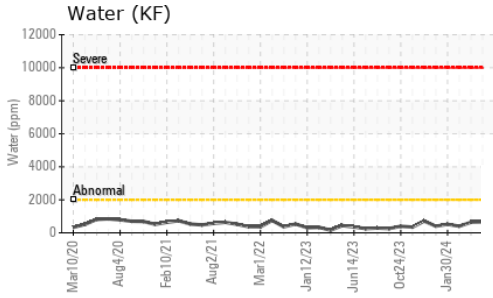
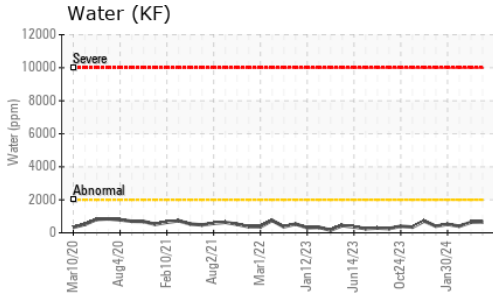


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		196	198	200

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

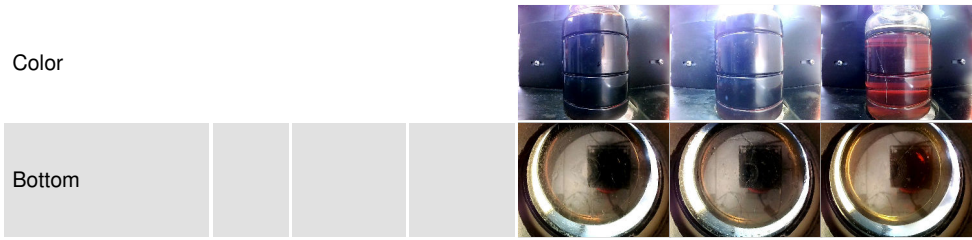

## GRAPHS

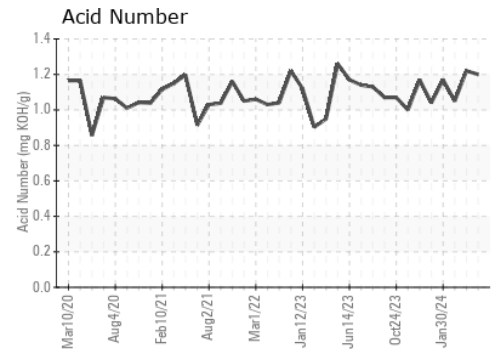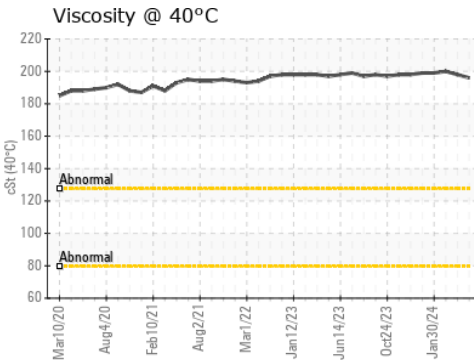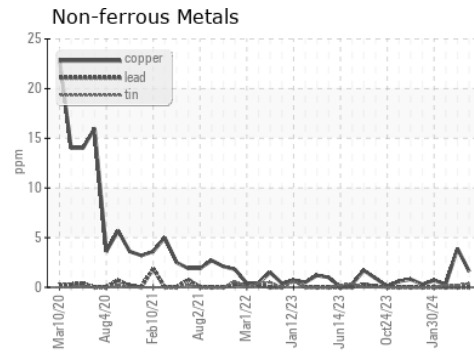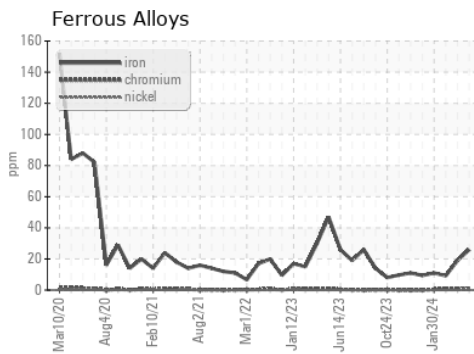

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RP0036876  
**Lab Number** : 06178857  
**Unique Number** : 11030183  
**Test Package** : IND 2

**Received** : 14 May 2024  
**Tested** : 15 May 2024  
**Diagnosed** : 15 May 2024 - Wes Davis

**NRG TEXAS LLC**  
 3784 FM 39 SOUTH  
 JEWETT, TX  
 US 75846

Contact: JURGEN THOMPSON  
 JThompson@ecomaterial.com

T: (903)626-9528  
 F: (903)626-9772

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)