OIL ANALYSIS REPORT

Sample Rating Trend

DEGRADATION

Machine Id
4549-2
Component
2 Gearbox
Fluid
OPTIGEAR RMO 150 (--- GAL)

DIAGNOSIS

Recommendation
The oil is near the end of it`s useful service life, recommend schedule an oil change. Resample at the next service interval to monitor. Please note that this is a corrected copy for diagnostic comment updates per supplied limits.

Wear
The lead level is abnormal. All other component wear rates are normal.

Contamination
There is no indication of any contamination in the oil.

Fluid Condition
The AN level is above the recommended limit.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**WC0920082**	---	---
Sample Date		Client Info		**24 Apr 2024**	---	---
Machine Age	mls	Client Info		**10380**	---	---
Oil Age	mls	Client Info		**10380**	---	---
Oil Changed		Client Info		**Not Changd**	---	---
Sample Status				**ABNORMAL**	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water		WC Method	>0.2	**NEG**	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	**39**	---	---
Chromium	ppm	ASTM D5185m	>10	**<1**	---	---
Nickel	ppm	ASTM D5185m	>10	**<1**	---	---
Titanium	ppm	ASTM D5185m		**<1**	---	---
Silver	ppm	ASTM D5185m		**0**	---	---
Aluminum	ppm	ASTM D5185m	>25	**10**	---	---
Lead	ppm	ASTM D5185m	>50	▲ **9**	---	---
Copper	ppm	ASTM D5185m	>200	**81**	---	---
Tin	ppm	ASTM D5185m	>10	**<1**	---	---
Vanadium	ppm	ASTM D5185m		**<1**	---	---
Cadmium	ppm	ASTM D5185m		**<1**	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		**7**	---	---
Barium	ppm	ASTM D5185m		**30**	---	---
Molybdenum	ppm	ASTM D5185m		**917**	---	---
Manganese	ppm	ASTM D5185m		**1**	---	---
Magnesium	ppm	ASTM D5185m		**21**	---	---
Calcium	ppm	ASTM D5185m		**126**	---	---
Phosphorus	ppm	ASTM D5185m		**1886**	---	---
Zinc	ppm	ASTM D5185m		**348**	---	---
Sulfur	ppm	ASTM D5185m		**20026**	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	**13**	---	---
Sodium	ppm	ASTM D5185m		**6**	---	---
Potassium	ppm	ASTM D5185m	>20	**3**	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		▲ **2.52**	---	---

OIL ANALYSIS REPORT

Non-ferrous Metals

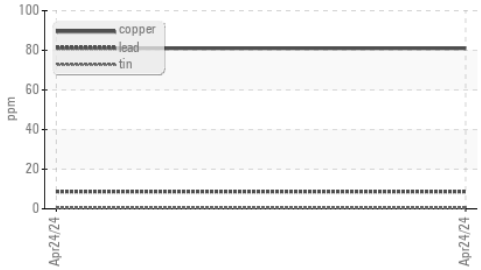

Non-ferrous Metals

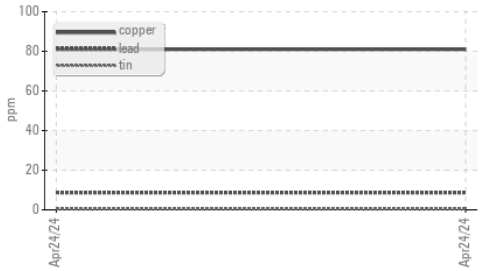

Viscosity @ 40°C

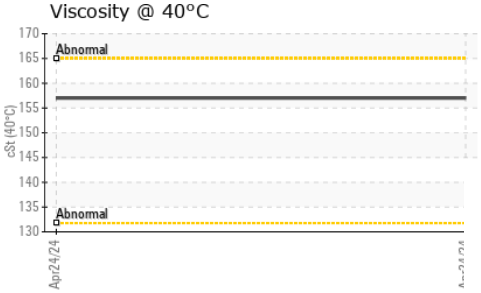

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	**NONE**	---	---
Yellow Metal	scalar	*Visual	NONE	**NONE**	---	---
Precipitate	scalar	*Visual	NONE	**NONE**	---	---
Silt	scalar	*Visual	NONE	**NONE**	---	---
Debris	scalar	*Visual	NONE	**LIGHT**	---	---
Sand/Dirt	scalar	*Visual	NONE	**NONE**	---	---
Appearance	scalar	*Visual	NORML	**NORML**	---	---
Odor	scalar	*Visual	NORML	**NORML**	---	---
Emulsified Water	scalar	*Visual	>0.2	**NEG**	---	---
Free Water	scalar	*Visual		**NEG**	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		**157**	---	---

SAMPLE IMAGES				current	history1	history2
Color				*no image*	*no image*	*no image*
Bottom				*no image*	*no image*	*no image*

GRAPHS

Iron (ppm)

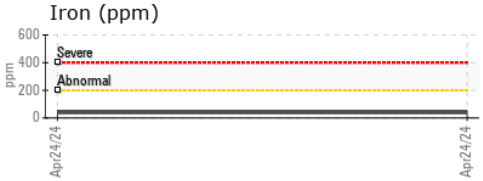

Lead (ppm)

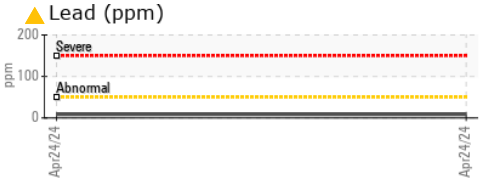

Aluminum (ppm)

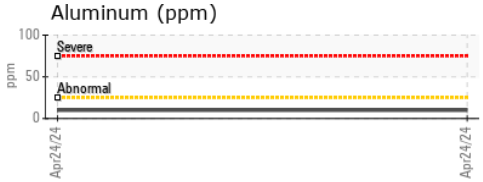

Chromium (ppm)

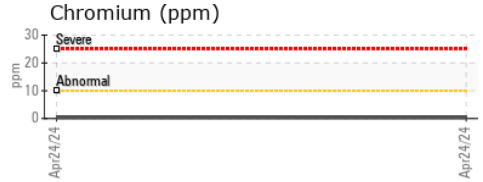

Copper (ppm)

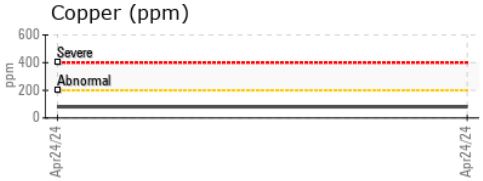

Silicon (ppm)

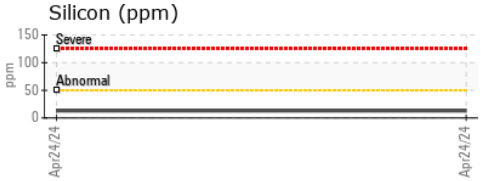

Viscosity @ 40°C

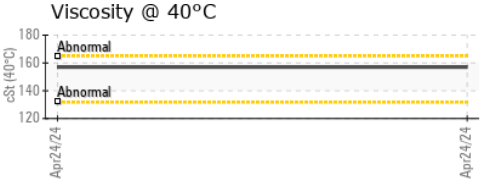

Acid Number

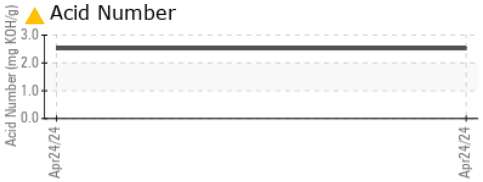

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0920082
Lab Number : 06178974
Unique Number : 11030300
Test Package : MOB 2

Received : 14 May 2024
Tested : 15 May 2024
Diagnosed : 20 Jun 2024 - Doug Bogart

ALSTOM C/O NEW JERSEY TRANSIT
1148 NEWARK TURNPIKE
KEARNY, NJ
US 07032
Contact: DAVE GILBERT
david.gilbert@alstomgroup.com
T:
F: (973)277-0826

To discuss this sample report, contact Customer Service at 1-800-237-1369.
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)