



OIL ANALYSIS REPORT

Sample Rating Trend



VISCOSITY



Machine Id
VOLVO A30G 752004
 Component
Front Axle
 Fluid
GEAR OIL SAE 80W90 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The oil viscosity is lower than normal. Confirm oil type.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		ML0001954	---	---
Sample Date	Client Info		09 May 2024	---	---
Machine Age	hrs	Client Info	4233	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed	Client Info		Not Changed	---	---
Sample Status			ATTENTION	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >900	321	---	---
Chromium	ppm	ASTM D5185m >20	7	---	---
Nickel	ppm	ASTM D5185m >10	4	---	---
Titanium	ppm	ASTM D5185m	0	---	---
Silver	ppm	ASTM D5185m	0	---	---
Aluminum	ppm	ASTM D5185m >30	<1	---	---
Lead	ppm	ASTM D5185m >50	0	---	---
Copper	ppm	ASTM D5185m >150	23	---	---
Tin	ppm	ASTM D5185m >20	<1	---	---
Vanadium	ppm	ASTM D5185m	<1	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 400	209	---	---
Barium	ppm	ASTM D5185m 200	1	---	---
Molybdenum	ppm	ASTM D5185m 12	11	---	---
Manganese	ppm	ASTM D5185m	25	---	---
Magnesium	ppm	ASTM D5185m 12	1	---	---
Calcium	ppm	ASTM D5185m 150	320	---	---
Phosphorus	ppm	ASTM D5185m 1650	1324	---	---
Zinc	ppm	ASTM D5185m 125	144	---	---
Sulfur	ppm	ASTM D5185m 22500	24503	---	---


CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	5	---	---
Sodium	ppm	ASTM D5185m >170	4	---	---
Potassium	ppm	ASTM D5185m >20	3	---	---

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	---	---
Yellow Metal	scalar	*Visual NONE	NONE	---	---
Precipitate	scalar	*Visual NONE	NONE	---	---
Silt	scalar	*Visual NONE	LIGHT	---	---
Debris	scalar	*Visual NONE	NONE	---	---
Sand/Dirt	scalar	*Visual NONE	NONE	---	---
Appearance	scalar	*Visual NORML	NORML	---	---
Odor	scalar	*Visual NORML	NORML	---	---
Emulsified Water	scalar	*Visual >0.2	NEG	---	---
Free Water	scalar	*Visual	NEG	---	---




OIL ANALYSIS REPORT

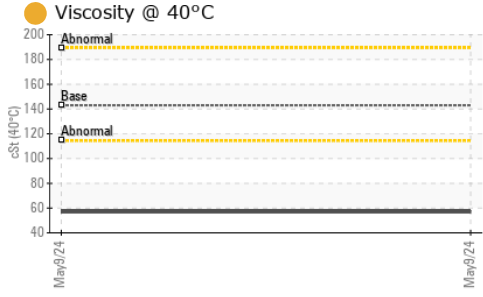

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 143	● 57.0	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

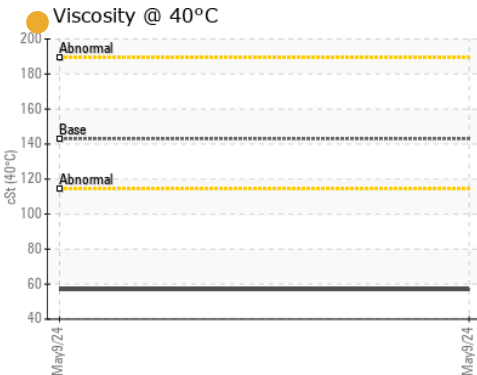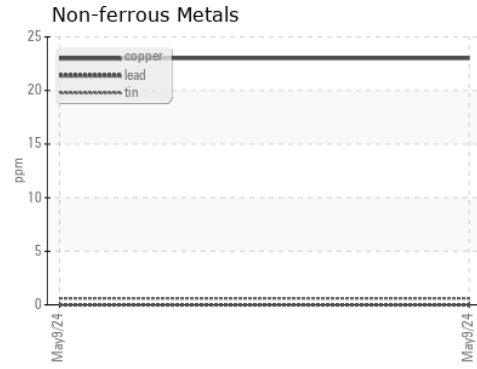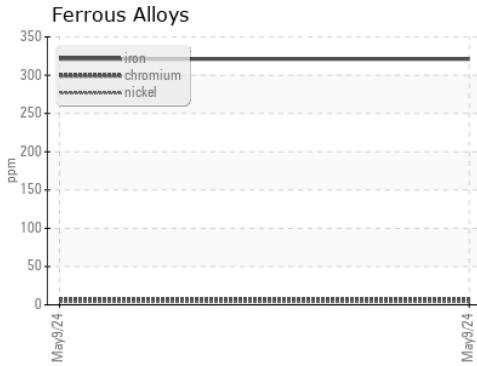

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0001954
Lab Number : 06179220
Unique Number : 11030546
Test Package : CONST

MCCLUNG-LOGAN EQUIPMENT CO - WINCHESTER
 160 KENTMERE COURT
 WINCHESTER, VA
 US 22603
 Contact: DAKOTA HARTLEY
 dhartley@mcclung-logan.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)