


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

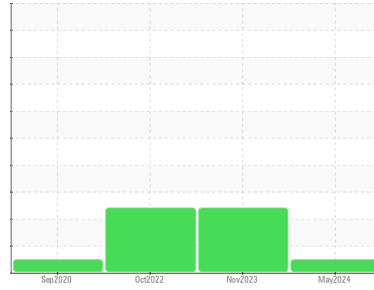

Machine Id
VOLVO A35G 342028
 Component
Front Axle
 Fluid
VOLVO SUPER GEAR OIL 75W-80-GO102 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			ML0001943	VCP407241	VCP389088
Sample Date	Client Info			09 May 2024	30 Nov 2023	27 Oct 2022
Machine Age	hrs	Client Info		9138	8454	7328
Oil Age	hrs	Client Info		684	0	800
Oil Changed	Client Info			N/A	Changed	Not Chngd
Sample Status				NORMAL	ATTENTION	ATTENTION

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	NEG	NEG	NEG


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>900	88	143	270
Chromium	ppm	ASTM D5185m	>20	1	1	4
Nickel	ppm	ASTM D5185m	>10	0	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>30	0	2	2
Lead	ppm	ASTM D5185m	>50	0	0	0
Copper	ppm	ASTM D5185m	>150	<1	4	2
Tin	ppm	ASTM D5185m	>20	0	0	0
Antimony	ppm	ASTM D5185m	>5	---	---	---
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		353	260	255
Barium	ppm	ASTM D5185m		0	2	2
Molybdenum	ppm	ASTM D5185m		1	2	4
Manganese	ppm	ASTM D5185m		3	5	10
Magnesium	ppm	ASTM D5185m		<1	4	3
Calcium	ppm	ASTM D5185m		13	41	26
Phosphorus	ppm	ASTM D5185m		2373	2285	2403
Zinc	ppm	ASTM D5185m		10	25	21
Sulfur	ppm	ASTM D5185m		31027	40894	32700

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	2	2	4
Sodium	ppm	ASTM D5185m		2	4	3
Potassium	ppm	ASTM D5185m	>20	<1	0	1

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	VLITE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

OIL ANALYSIS REPORT

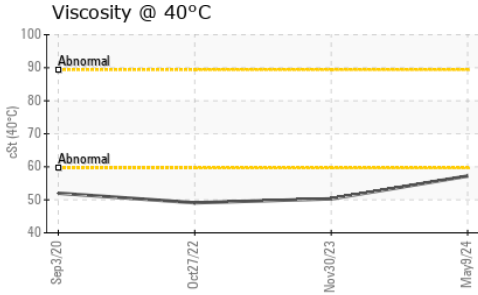




FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445	57.2	50.3	49.1

SAMPLE IMAGES

method	limit/base	current	history1	history2
Color		no image	no image	no image
Bottom		no image	no image	no image

GRAPHS

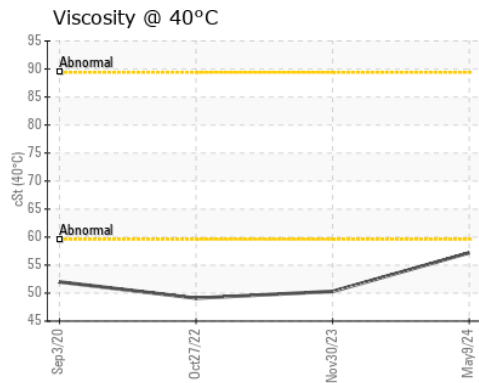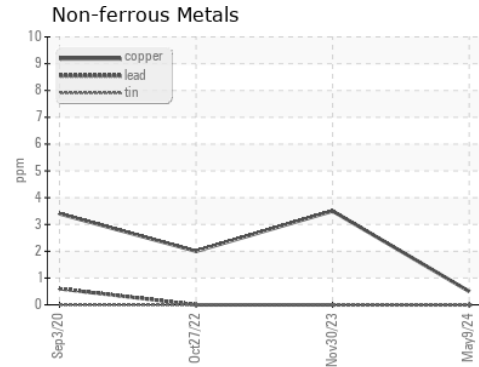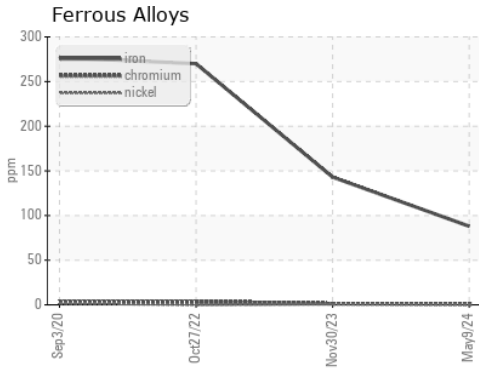

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0001943
Lab Number : 06179229
Unique Number : 11030555
Test Package : CONST

Received : 14 May 2024
Tested : 15 May 2024
Diagnosed : 16 May 2024 - Don Baldrige

McCLUNG-LOGAN EQUIPMENT CO - RICHMOND
 1345 MOUNTAIN ROAD
 GLEN ALLEN, VA
 US 23060
 Contact: KYLE RATLIFF
 KRATLIFFE@McCLUNG-LOGAN.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (804)266-1611