

## **OIL ANALYSIS REPORT**

### HOTLINE/120 MILL Machine to 120 STAND 2A GEN EAST BRG 1415-034-0181 Component

Bearing

Fluid ROYAL PURPLE SYNFILM GT 68 (25 GAL)

### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### 📥 Wear


The lead level is abnormal. All other component wear rates are normal.

#### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

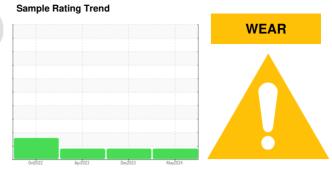


SAMPLE INFORM	<b>IATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		KFS0004801	KFS0002497	KFS0003480
Sample Date		Client Info		10 May 2024	20 Dec 2023	17 Apr 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method		NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>20	2	1	1
Chromium	ppm	ASTM D5185m	>20	0	<1	0
Nickel	ppm	ASTM D5185m	>20	<1	0	0
Titanium	ppm	ASTM D5185m	-	0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	<1	2	<1
Lead	ppm	ASTM D5185m	>20	▲ 55	60	▲ 51
Copper	ppm	ASTM D5185m		2	2	2
Tin	ppm		>20	- <1	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES	1.15	method	limit/base	current	history1	history2
Boron	nom	ASTM D5185m		0	0	0
Barium	ppm ppm	ASTM D5185m		<1	0	0
Volybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	0	1
Vagnesium		ASTM D5185m	90	39	42	45
Calcium	ppm	ASTM D5185m	90	2	42	<1
	ppm				32	3
Phosphorus	ppm	ASTM D5185m		3		
Zinc	ppm	ASTM D5185m		0	0	2
Sulfur	ppm	ASTM D5185m		22046	21075	22130
CONTAMINANTS	5	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m		<1	1	<1
Sodium	ppm	ASTM D5185m		3	3	4
Potassium	ppm	ASTM D5185m	>20	2	2	<1
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	1150	2380	1208
Particles >6µm		ASTM D7647	>2500	188	387	250
Particles >14µm		ASTM D7647	>160	23	23	17
Particles >21µm		ASTM D7647	>40	9	9	4
Particles >38µm		ASTM D7647	>10	1	0	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/14	17/15/12	18/16/12	17/15/11
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.44	0.41	0.43
:57:25) Rev: 1	0 - 0			Submitted By: COLD MILL - Josh Edwards		


Submitted By: COLD MILL - Josh Edwards Page 1 of 2





particles (per 1


# **OIL ANALYSIS REPORT**

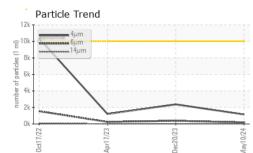


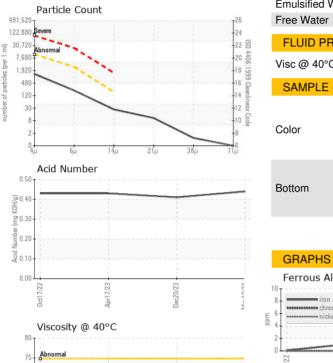






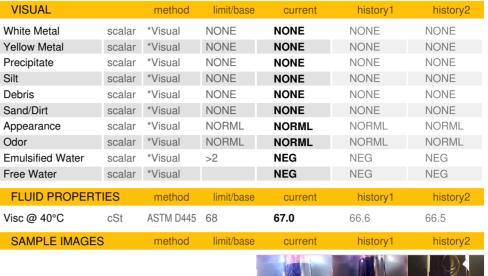



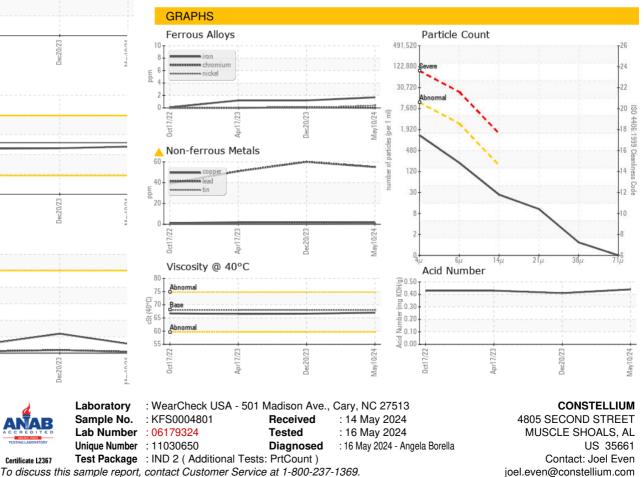

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: CONMUSAL [WUSCAR] 06179324 (Generated: 05/16/2024 18:57:25) Rev: 1

Certificate 12367

Submitted By: COLD MILL - Josh Edwards

E:

T: (256)740-7490