




OIL ANALYSIS REPORT

Sample Rating Trend

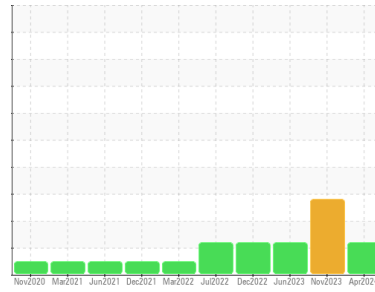

ISO



Area
DICK LAVY
 Machine Id
DICK LAVY 4825
 Component
Front Differential
 Fluid
GEAR OIL SAE 75W90 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the fluid.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0900745	WC0853968	WC0828757
Sample Date	Client Info		21 Apr 2024	04 Nov 2023	03 Jun 2023
Machine Age	mls	Client Info	463407	402624	347036
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	212	231	207
Chromium	ppm	ASTM D5185m >10	<1	2	1
Nickel	ppm	ASTM D5185m >10	1	<1	0
Titanium	ppm	ASTM D5185m	<1	<1	<1
Silver	ppm	ASTM D5185m	<1	0	0
Aluminum	ppm	ASTM D5185m >25	2	2	1
Lead	ppm	ASTM D5185m >25	0	0	0
Copper	ppm	ASTM D5185m >100	1	2	2
Tin	ppm	ASTM D5185m >10	<1	<1	0
Vanadium	ppm	ASTM D5185m	0	0	<1
Cadmium	ppm	ASTM D5185m	<1	<1	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 400	222	277	262
Barium	ppm	ASTM D5185m 200	2	0	0
Molybdenum	ppm	ASTM D5185m 12	0	<1	0
Manganese	ppm	ASTM D5185m	13	14	13
Magnesium	ppm	ASTM D5185m 12	5	2	3
Calcium	ppm	ASTM D5185m 150	10	8	4
Phosphorus	ppm	ASTM D5185m 1650	1281	1345	1292
Zinc	ppm	ASTM D5185m 125	16	7	18
Sulfur	ppm	ASTM D5185m 22500	23552	23255	24929

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	71	▲ 86	67
Sodium	ppm	ASTM D5185m	5	4	5
Potassium	ppm	ASTM D5185m >20	3	3	2
Water	%	ASTM D6304 >.2	0.035	0.021	0.033
ppm Water	ppm	ASTM D6304 >2000	353	215	332.2

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	▲ 147767	▲ 96356	▲ 103514
Particles >6µm	ASTM D7647	>5000	▲ 18659	▲ 20250	▲ 16909
Particles >14µm	ASTM D7647	>640	68	58	37
Particles >21µm	ASTM D7647	>160	13	7	4
Particles >38µm	ASTM D7647	>40	1	1	0
Particles >71µm	ASTM D7647	>10	0	0	0
Oil Cleanliness	ISO 4406 (c)	>21/19/16	▲ 24/21/13	▲ 24/22/13	▲ 24/21/12


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 2.00	2.30	2.01	2.28




OIL ANALYSIS REPORT


Particle Trend

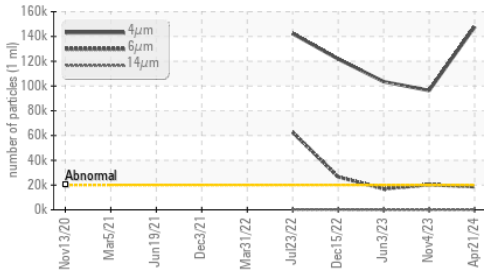


Water (KF)

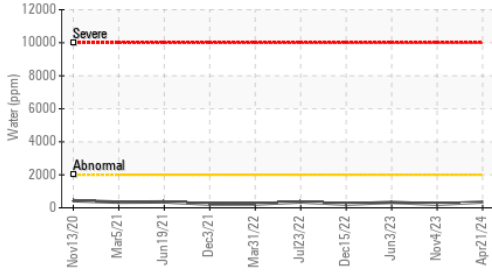


Viscosity @ 100°C

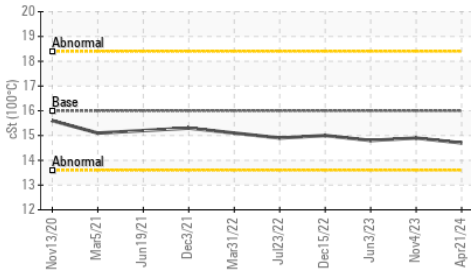

Water (KF)

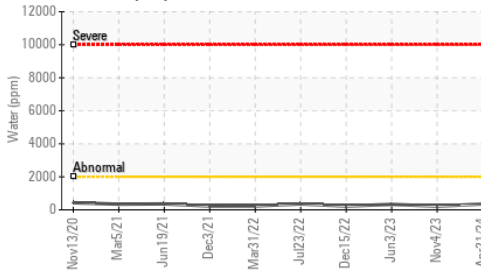

Viscosity @ 100°C

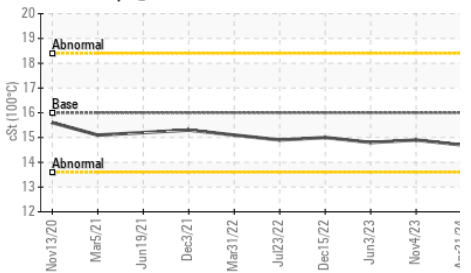


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	109	109	110
Visc @ 100°C	cSt	ASTM D445	16.0	14.9	14.8
Viscosity Index (VI)	Scale	ASTM D2270	157	141	139

SAMPLE IMAGES


Color

Bottom

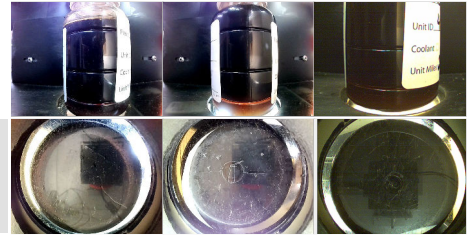


GRAPHS


Ferrous Alloys

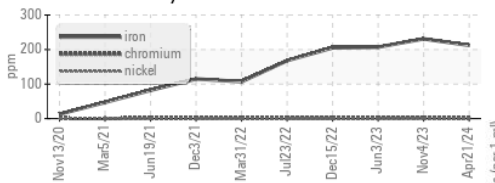


Non-ferrous Metals

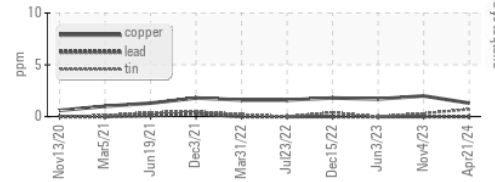


Viscosity @ 40°C

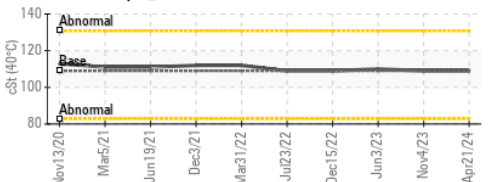

Particle Count

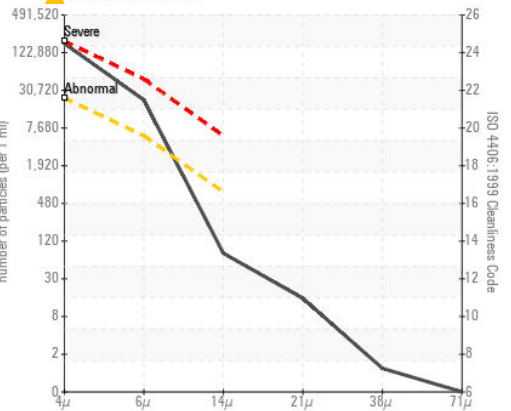

Acid Number

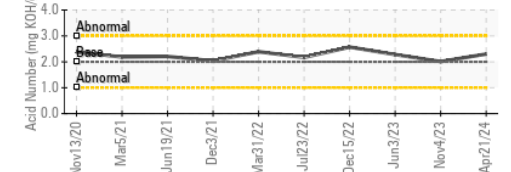

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0900745 Received : 14 May 2024
 Lab Number : 06179358 Tested : 16 May 2024
 Unique Number : 11030684 Diagnosed : 16 May 2024 - Angela Borella
 Test Package : MOB 2 (Additional Tests: KF, KV100, PrtCount, VI)

BASF - GIANNA CREDAROLI
 500 WHITE PLAINS RD
 TARRYTOWN, NY
 US 10591
 Contact: GIANNA CREDAROLI
 gianna.credaroli@basf.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: