




OIL ANALYSIS REPORT

Sample Rating Trend

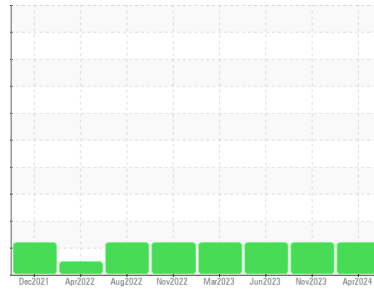

Area
DICK LAVY
 Machine Id
DICK LAVY 4858
 Component
Front Differential
 Fluid
GEAR OIL SAE 75W90 (--- GAL)

DIAGNOSIS

Recommendation
 No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is a high amount of silt (particulates < 14 microns in size) present in the fluid.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0900741	WC0876041	WC0828769
Sample Date	Client Info		08 Apr 2024	13 Nov 2023	13 Jun 2023
Machine Age	mls	Client Info	375323	318544	260004
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	359	345	287
Chromium	ppm	ASTM D5185m >10	2	2	1
Nickel	ppm	ASTM D5185m >10	1	0	0
Titanium	ppm	ASTM D5185m	<1	0	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >25	3	2	2
Lead	ppm	ASTM D5185m >25	0	0	0
Copper	ppm	ASTM D5185m >100	2	2	2
Tin	ppm	ASTM D5185m >10	<1	0	0
Vanadium	ppm	ASTM D5185m	0	<1	<1
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 400	151	138	157
Barium	ppm	ASTM D5185m 200	2	0	0
Molybdenum	ppm	ASTM D5185m 12	0	0	0
Manganese	ppm	ASTM D5185m	16	16	14
Magnesium	ppm	ASTM D5185m 12	6	0	2
Calcium	ppm	ASTM D5185m 150	30	19	25
Phosphorus	ppm	ASTM D5185m 1650	1103	1078	1038
Zinc	ppm	ASTM D5185m 125	19	6	9
Sulfur	ppm	ASTM D5185m 22500	28873	24241	25056

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	47	43	30
Sodium	ppm	ASTM D5185m	7	6	5
Potassium	ppm	ASTM D5185m >20	3	<1	3
Water	%	ASTM D6304 >.2	0.040	0.028	0.035
ppm Water	ppm	ASTM D6304 >2000	401	289	353.9

FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	▲ 139491	▲ 132222	▲ 144891
Particles >6µm	ASTM D7647	>5000	▲ 17604	▲ 20606	▲ 41778
Particles >14µm	ASTM D7647	>640	69	88	179
Particles >21µm	ASTM D7647	>160	3	10	11
Particles >38µm	ASTM D7647	>40	0	0	0
Particles >71µm	ASTM D7647	>10	0	0	0
Oil Cleanliness	ISO 4406 (c)	>21/19/16	▲ 24/21/13	▲ 24/22/14	▲ 24/23/15

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 2.00	2.68	3.31	2.68



OIL ANALYSIS REPORT

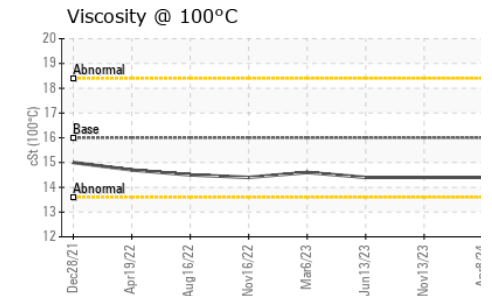
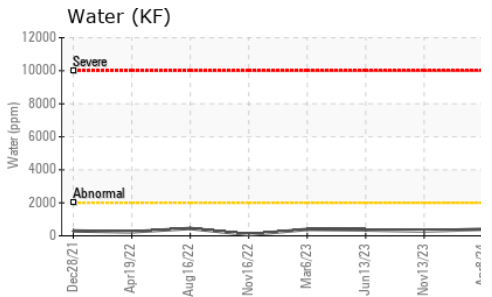
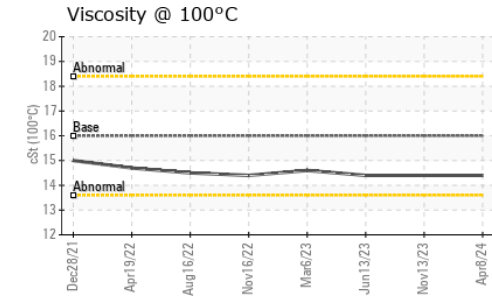
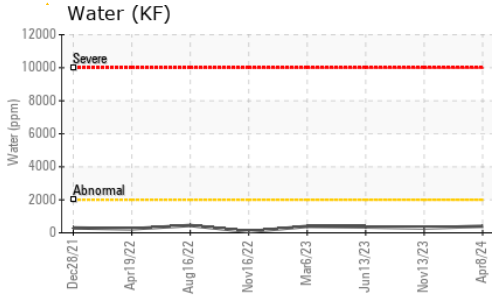
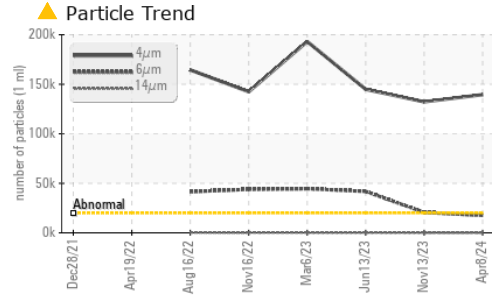


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	LIGHT	LIGHT
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	109	96.8	96.3
Visc @ 100°C	cSt	ASTM D445	16.0	14.4	14.4
Viscosity Index (VI)	Scale	ASTM D2270	157	153	154

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

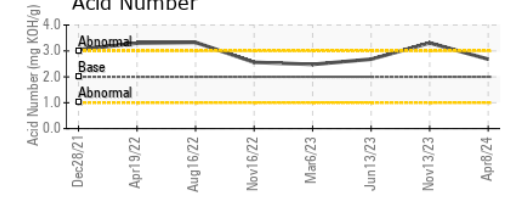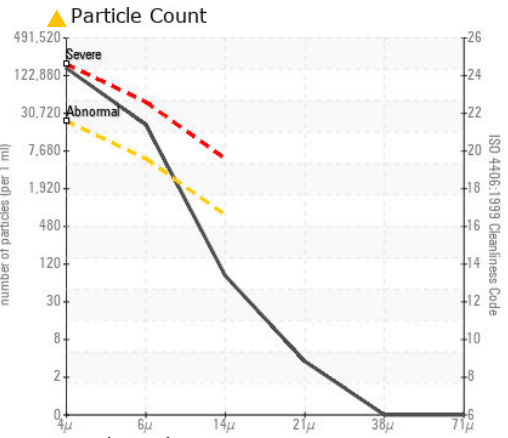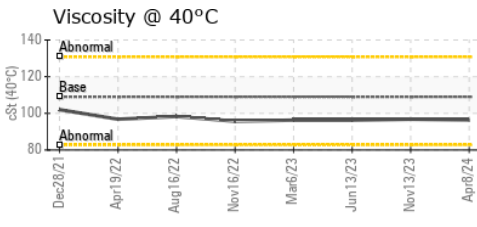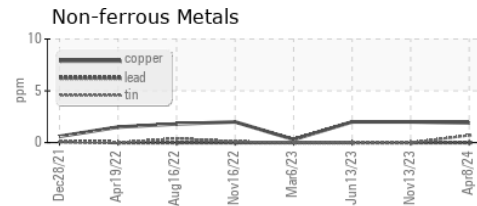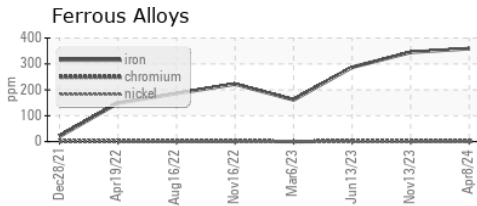

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0900741 **Received** : 14 May 2024
Lab Number : 06179359 **Tested** : 16 May 2024
Unique Number : 11030685 **Diagnosed** : 16 May 2024 - Angela Borella
Test Package : MOB 2 (Additional Tests: KF, KV100, PrtCount, VI)

BASF - GIANNA CREDAROLI
 500 WHITE PLAINS RD
 TARRYTOWN, NY
 US 10591
 Contact: GIANNA CREDAROLI
 gianna.credaroli@basf.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)