




# OIL ANALYSIS REPORT

## Sample Rating Trend

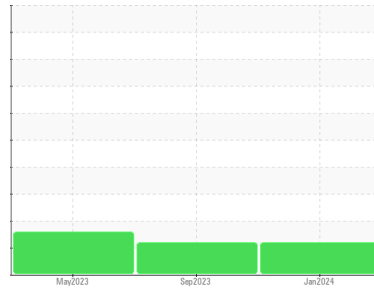

ISO



Area  
**PITT OHIO**  
 Machine Id  
**PITT OHIO D2680**  
 Component  
**Front Differential**  
 Fluid  
 {not provided} (--- GAL)

### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0934485</b>	WC0853878	WC0828717
Sample Date	Client Info		<b>10 Jan 2024</b>	20 Sep 2023	22 May 2023
Machine Age	mls	Client Info	<b>107812</b>	50801	80
Oil Age	mls	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	<b>84</b>	81	6
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m >10	<b>1</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>&lt;1</b>	0	0
Lead	ppm	ASTM D5185m >25	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >100	<b>&lt;1</b>	<1	0
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>96</b>	94	105
Barium	ppm	ASTM D5185m	<b>2</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>0</b>	<1	0
Manganese	ppm	ASTM D5185m	<b>6</b>	6	1
Magnesium	ppm	ASTM D5185m	<b>171</b>	175	188
Calcium	ppm	ASTM D5185m	<b>4</b>	2	1
Phosphorus	ppm	ASTM D5185m	<b>1776</b>	1705	1696
Zinc	ppm	ASTM D5185m	<b>0</b>	0	0
Sulfur	ppm	ASTM D5185m	<b>30122</b>	27038	25056

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	<b>8</b>	9	3
Sodium	ppm	ASTM D5185m	<b>4</b>	3	<1
Potassium	ppm	ASTM D5185m >20	<b>2</b>	<1	0
Water	%	ASTM D6304 >.2	<b>0.025</b>	0.017	0.038
ppm Water	ppm	ASTM D6304 >2000	<b>259</b>	176.4	384.7

### FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	▲ <b>102553</b>	▲ 120739	▲ 113061
Particles >6µm	ASTM D7647	>5000	● <b>5865</b>	▲ 12596	▲ 40518
Particles >14µm	ASTM D7647	>640	<b>109</b>	44	▲ 972
Particles >21µm	ASTM D7647	>160	<b>24</b>	7	117
Particles >38µm	ASTM D7647	>40	<b>0</b>	0	3
Particles >71µm	ASTM D7647	>10	<b>0</b>	0	1
Oil Cleanliness	ISO 4406 (c)	>21/19/16	▲ <b>24/20/14</b>	▲ 24/21/13	▲ 24/23/17

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.68</b>	0.72	0.77




# OIL ANALYSIS REPORT

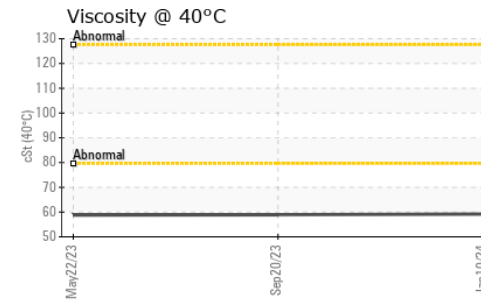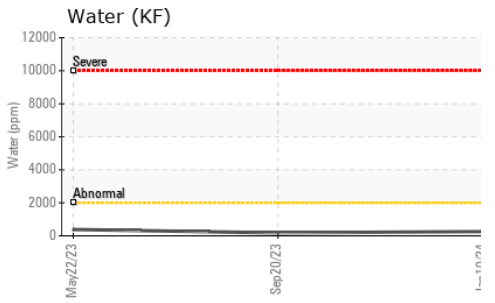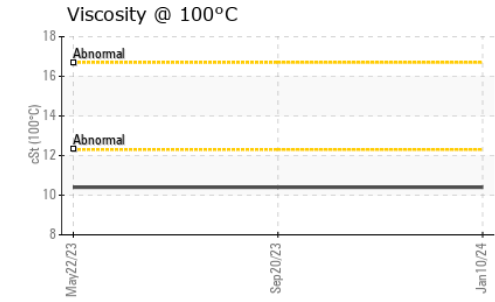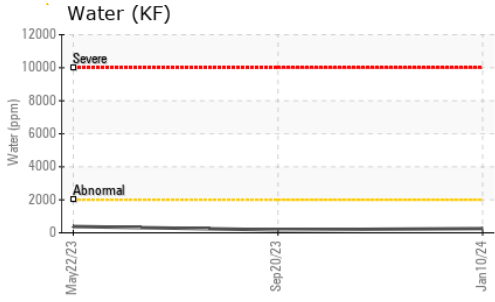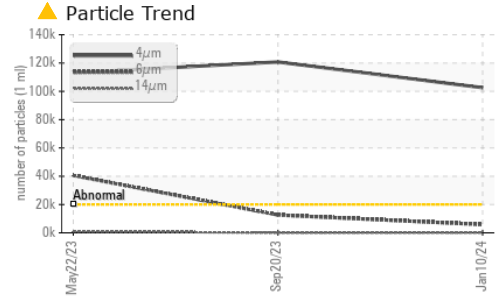






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	59.2	58.9	58.8
Visc @ 100°C	cSt	ASTM D445	10.4	10.4	10.4
Viscosity Index (VI)	Scale	ASTM D2270	166	167	167

### SAMPLE IMAGES

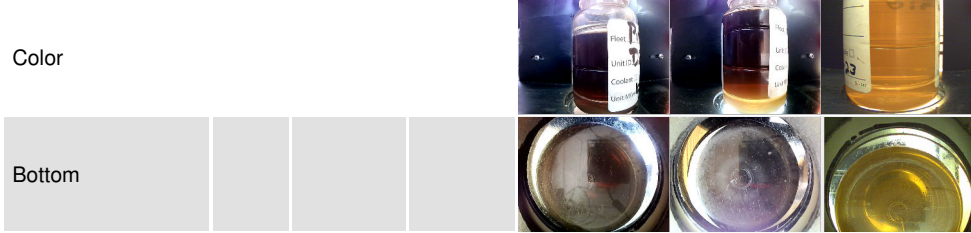

### GRAPHS

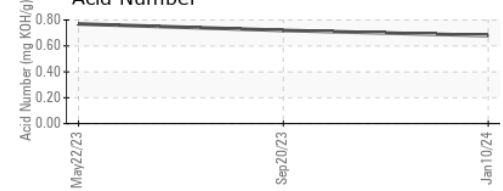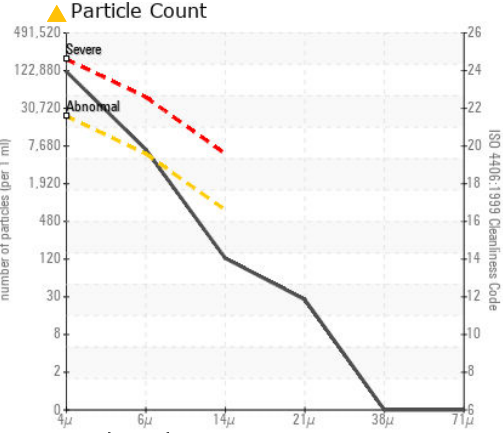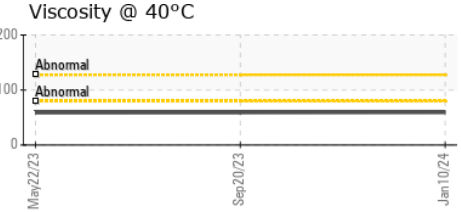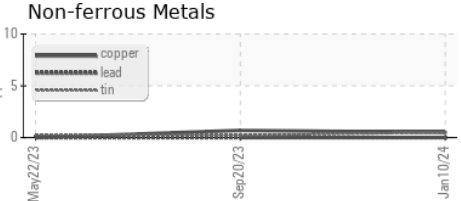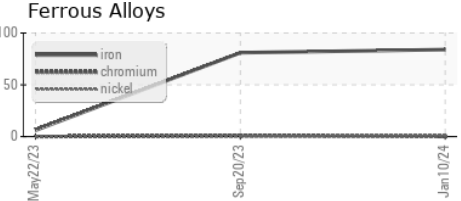

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0934485      **Received** : 14 May 2024  
**Lab Number** : 06179401      **Tested** : 16 May 2024  
**Unique Number** : 11030727      **Diagnosed** : 16 May 2024 - Angela Borella  
**Test Package** : MOB 2 ( Additional Tests: KF, KV100, PrtCount, VI )

**BASF - GIANNA CREDAROLI**  
 500 WHITE PLAINS RD  
 TARRYTOWN, NY  
 US 10591  
 Contact: GIANNA CREDAROLI  
 gianna.credaroli@basf.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)