




OIL ANALYSIS REPORT

Sample Rating Trend

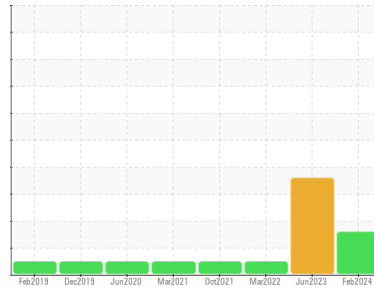

Area
METRO
 Machine Id
METRO 20001
 Component
Rear Differential
 Fluid
 {not provided} (--- GAL)

DIAGNOSIS

- Recommendation**
No corrective action is recommended at this time. Resample at the next service interval to monitor.
- Wear**
Gear wear is indicated.
- Contamination**
There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.
- Fluid Condition**
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0934470	WC0828736	WC0682396
Sample Date	Client Info			28 Feb 2024	26 Jun 2023	11 Mar 2022
Machine Age	mls	Client Info		441410	355229	265136
Oil Age	mls	Client Info		0	0	0
Oil Changed	Client Info			N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	NORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	▲ 533	▲ 632	493
Chromium	ppm	ASTM D5185m	>10	4	5	4
Nickel	ppm	ASTM D5185m	>10	5	7	6
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>25	7	8	10
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>100	2	3	2
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Antimony	ppm	ASTM D5185m	>5	---	---	---
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	<1

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		81	130	51
Barium	ppm	ASTM D5185m		2	3	0
Molybdenum	ppm	ASTM D5185m		4	7	1
Manganese	ppm	ASTM D5185m		6	6	5
Magnesium	ppm	ASTM D5185m		144	185	173
Calcium	ppm	ASTM D5185m		7	8	4
Phosphorus	ppm	ASTM D5185m		1804	2214	1717
Zinc	ppm	ASTM D5185m		7	11	<1
Sulfur	ppm	ASTM D5185m		28371	31313	20731






CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	70	▲ 81	46
Sodium	ppm	ASTM D5185m		8	7	7
Potassium	ppm	ASTM D5185m	>20	4	4	0
Water	%	ASTM D6304	>.2	0.050	0.046	0.037
ppm Water	ppm	ASTM D6304	>2000	505	466.6	372.3

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	● 32916	▲ 90701	---
Particles >6µm		ASTM D7647	>5000	799	● 9060	---
Particles >14µm		ASTM D7647	>640	19	53	---
Particles >21µm		ASTM D7647	>160	4	7	---
Particles >38µm		ASTM D7647	>40	1	0	---
Particles >71µm		ASTM D7647	>10	0	0	---
Oil Cleanliness		ISO 4406 (c)	>21/19/16	● 22/17/11	▲ 24/20/13	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		1.10	0.97	0.66




OIL ANALYSIS REPORT

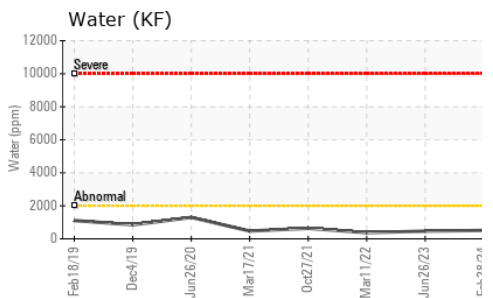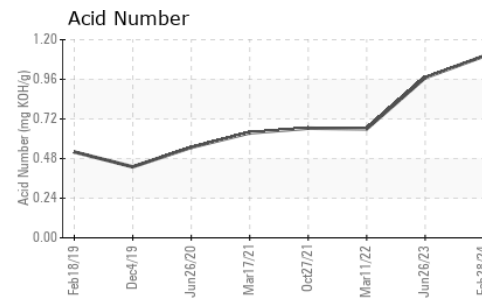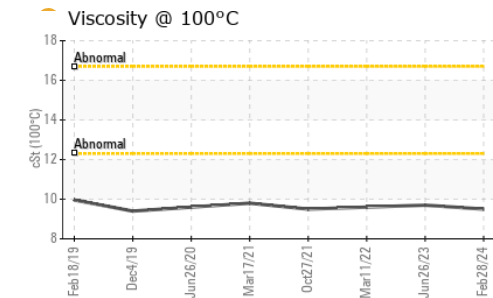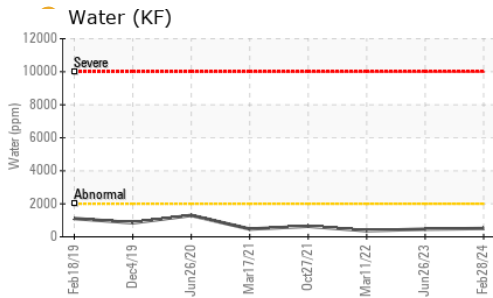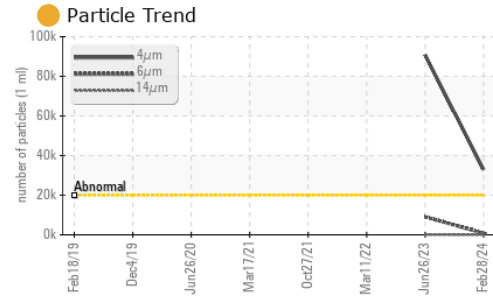





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	51.4	51.8	50.6
Visc @ 100°C	cSt	ASTM D445	9.5	9.7	9.6
Viscosity Index (VI)	Scale	ASTM D2270	171	175	177

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

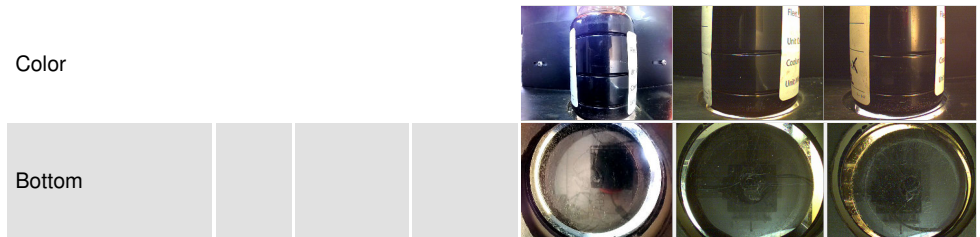

GRAPHS

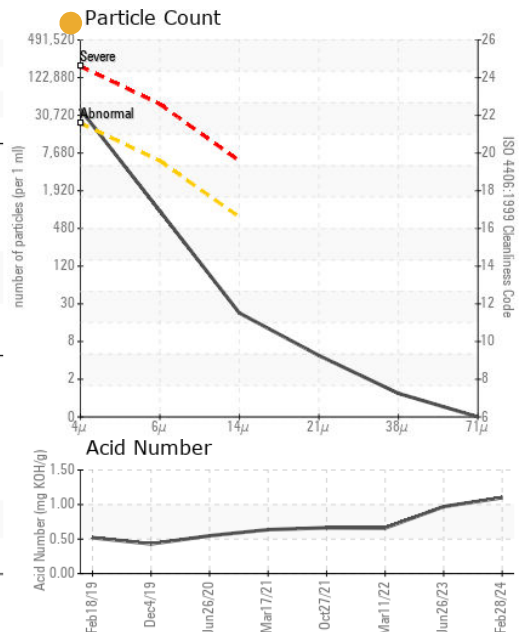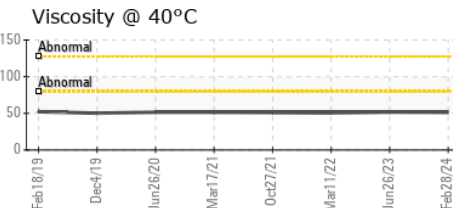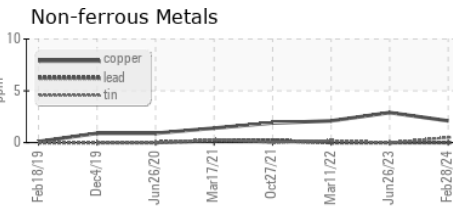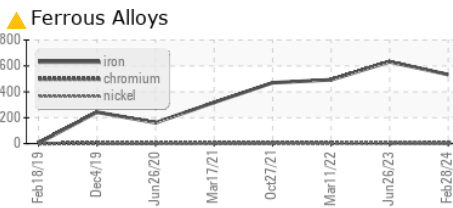

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0934470 **Received** : 14 May 2024
Lab Number : 06179403 **Tested** : 16 May 2024
Unique Number : 11030729 **Diagnosed** : 16 May 2024 - Angela Borella
Test Package : MOB 2 (Additional Tests: KF, KV100, PrtCount, VI)

BASF - GIANNA CREDAROLI
 500 WHITE PLAINS RD
 TARRYTOWN, NY
 US 10591
 Contact: GIANNA CREDAROLI
 gianna.credaroli@basf.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)