

OIL ANALYSIS REPORT



Machine Id

COLD MILL Component Gearbox Fluid {not provided} (--- GAL)

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. We recommend you service the filters on this component. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The water content is negligible.


Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC06179426		
Sample Date		Client Info		09 May 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	21		
Chromium	ppm	ASTM D5185m	>15	0		
Nickel	ppm		>15	<1		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	<1		
Lead	ppm	ASTM D5185m	>100	6		
Copper	ppm	ASTM D5185m	>200	0		
Tin	ppm	ASTM D5185m	>25	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		9		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		۰ <1		
Magnesium	ppm	ASTM D5185m		3		
Calcium	ppm	ASTM D5185m		46		
Phosphorus	ppm	ASTM D5185m		331		
Zinc	ppm	ASTM D5185m		39		
Sulfur	ppm	ASTM D5185m		7367		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	2		
Sodium	ppm	ASTM D5185m	200	2		
Potassium	ppm	ASTM D5185m	>20	3		
Water	%	ASTM D6304	>0.2	0.004		
ppm Water	ppm	ASTM D6304	>2000	40		
FLUID CLEANLIN		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	▲ 41402		
Particles >4µm		ASTM D7647 ASTM D7647	>5000	6317		
Particles >14µm		ASTM D7647	>640	183		
Particles >21µm		ASTM D7647	>160	43		
Particles >38µm		ASTM D7647	>40	2		
Particles >71µm		ASTM D7647	>10	0		
Oil Cleanliness		ISO 4406 (c)	>21/19/16	A 23/20/15		
	TION	()				
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.75		



OIL ANALYSIS REPORT

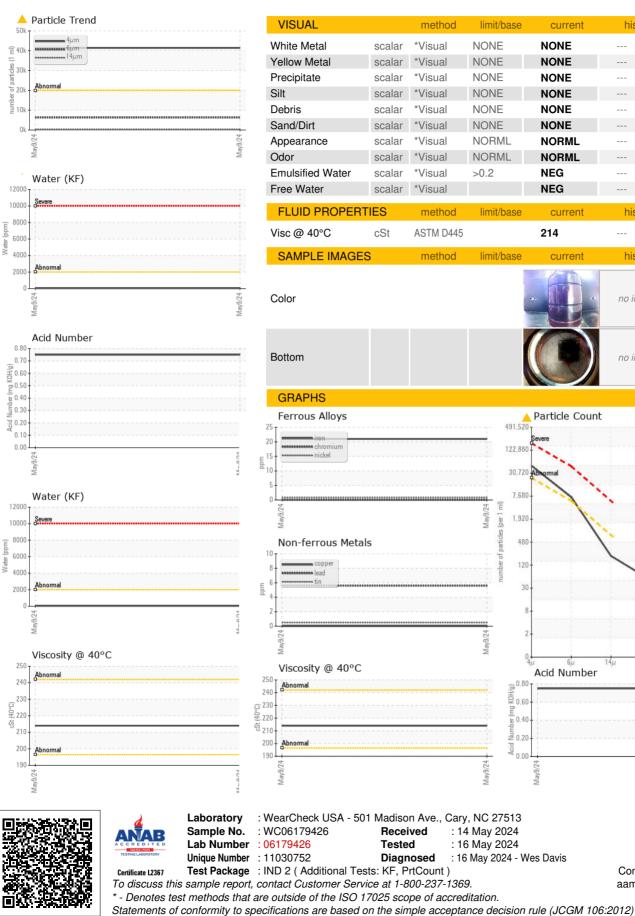

METALUBE INC 56 CYPRESS DR YOUNGSVILLE, NC US 27596 Contact: AUSTIN AMARAL aamaral@metalubeinc.com T: F: (919)554-3023

214

38

Report Id: METYOU [WUSCAR] 06179426 (Generated: 05/16/2024 14:32:21) Rev: 1

Contact/Location: AUSTIN AMARAL - METYOU

history1

history

history1

no image

no image

current

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

current

current

Particle Count

Acid Number

NEG

NEG

214

history2

history

history2

no image

no imade

4406

:1999 Cle

14