




# OIL ANALYSIS REPORT

Sample Rating Trend

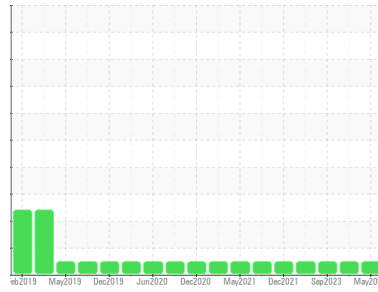

**NORMAL**



Machine Id  
**FREIGHTLINER 2371**  
 Component  
**Diesel Engine**  
 Fluid  
 **DIESEL ENGINE OIL SAE 15W40 (19 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>RW0004751</b>	RW0004813	RW0004481
Sample Date	Client Info		<b>06 May 2024</b>	23 Jan 2024	05 Sep 2023
Machine Age	hrs	Client Info	<b>7521</b>	7137	6698
Oil Age	hrs	Client Info	<b>384</b>	439	638
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >75	<b>9</b>	11	14
Chromium	ppm	ASTM D5185m >5	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >15	<b>2</b>	3	<1
Lead	ppm	ASTM D5185m >25	<b>0</b>	3	0
Copper	ppm	ASTM D5185m >100	<b>&lt;1</b>	2	<1
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>4</b>	5	3
Barium	ppm	ASTM D5185m 10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 100	<b>58</b>	62	58
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	2	<1
Magnesium	ppm	ASTM D5185m 450	<b>916</b>	954	936
Calcium	ppm	ASTM D5185m 3000	<b>1066</b>	1070	1071
Phosphorus	ppm	ASTM D5185m 1150	<b>1056</b>	1080	961
Zinc	ppm	ASTM D5185m 1350	<b>1253</b>	1308	1216
Sulfur	ppm	ASTM D5185m 4250	<b>3617</b>	3136	3369

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>2</b>	5	3
Sodium	ppm	ASTM D5185m >158	<b>2</b>	3	2
Potassium	ppm	ASTM D5185m >20	<b>2</b>	4	1

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	<b>0.2</b>	0.3	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.4</b>	9.0	10.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.0</b>	19.3	20.8


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.5</b>	17.5	19.0
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>9.91</b>	8.60	8.42




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

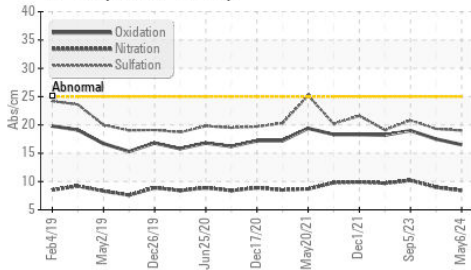

Base Number

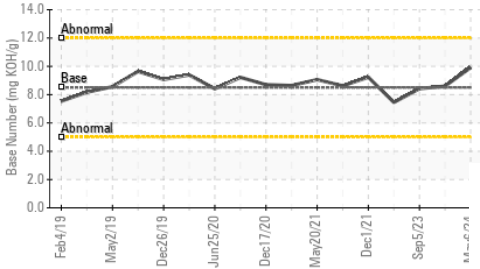









Viscosity @ 100°C

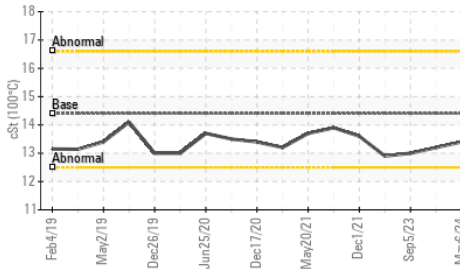

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	13.4	13.2

## GRAPHS

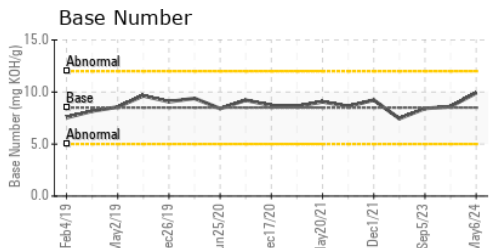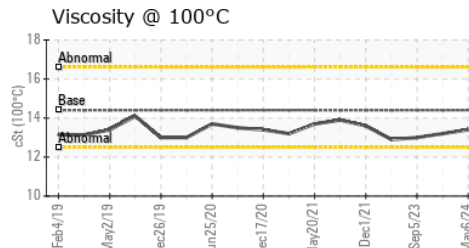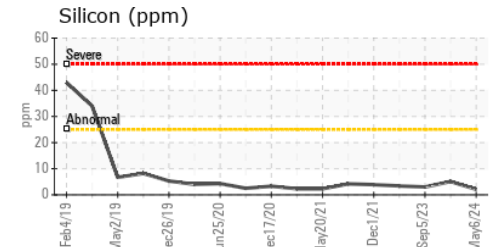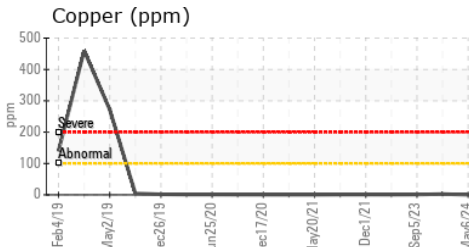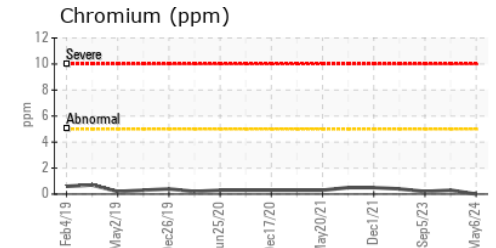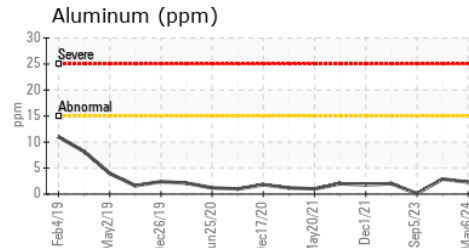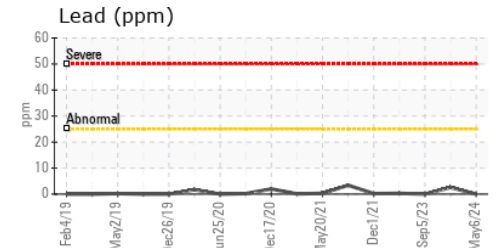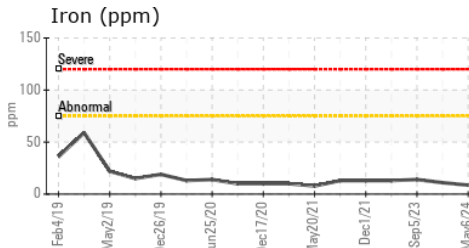

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RW0004751 **Received** : 14 May 2024  
**Lab Number** : 06179500 **Tested** : 15 May 2024  
**Unique Number** : 11030826 **Diagnosed** : 15 May 2024 - Wes Davis  
**Test Package** : MOB 2

**CITY OF FARMINGTON HILLS**  
 27245 HALSTED RD  
 FARMINGTON HILLS, MI  
 US 48331  
 Contact: JERRY BROCK  
 jbrock@fhgov.com  
 T: (248)871-2850  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)