




# OIL ANALYSIS REPORT

## Sample Rating Trend

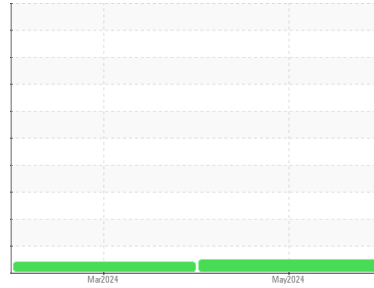

**NORMAL**



Machine Id  
**INTERNATIONAL 101**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON HP 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0905899</b>	WC0878891	---
Sample Date	Client Info			<b>08 May 2024</b>	14 Mar 2024	---
Machine Age	mls	Client Info		<b>189996</b>	185470	---
Oil Age	mls	Client Info		<b>5000</b>	5000	---
Oil Changed	Client Info			<b>Changed</b>	N/A	---
Sample Status				<b>NORMAL</b>	ATTENTION	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>2.0		<b>&lt;1.0</b>	0.5	---
Water	WC Method	>0.2		<b>NEG</b>	NEG	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>45</b>	46	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	---
Lead	ppm	ASTM D5185m	>40	<b>1</b>	0	---
Copper	ppm	ASTM D5185m	>330	<b>4</b>	5	---
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>2</b>	6	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>61</b>	57	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>915</b>	890	---
Calcium	ppm	ASTM D5185m		<b>1375</b>	1269	---
Phosphorus	ppm	ASTM D5185m		<b>1127</b>	946	---
Zinc	ppm	ASTM D5185m		<b>1326</b>	1226	---
Sulfur	ppm	ASTM D5185m		<b>3883</b>	3580	---




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>5</b>	4	---
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	2	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	2	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.7</b>	0.7	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.6</b>	6.9	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.0</b>	18.8	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>13.4</b>	13.8	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>8.7</b>	8.7	---











# OIL ANALYSIS REPORT

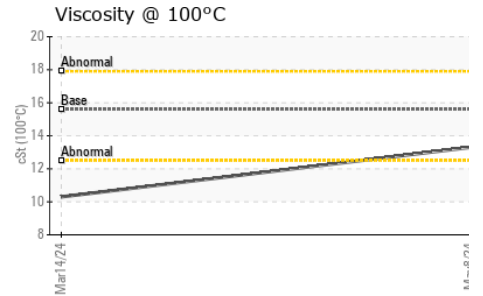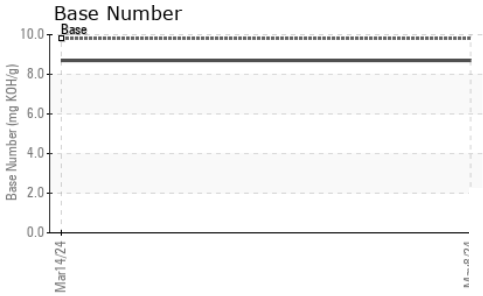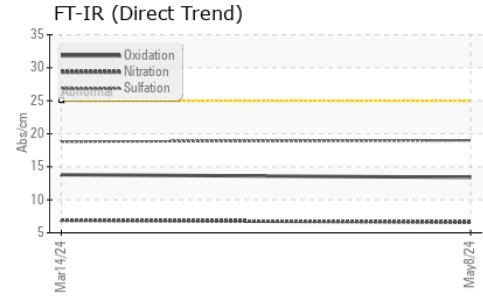

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.6	<b>13.3</b>	10.3

### GRAPHS

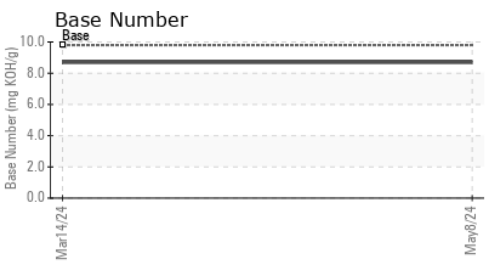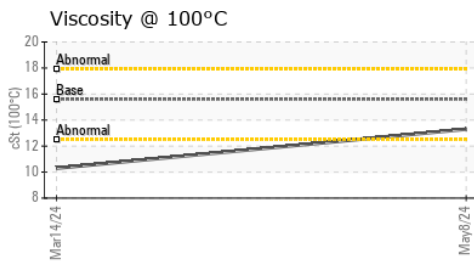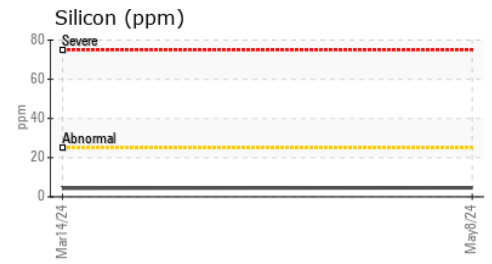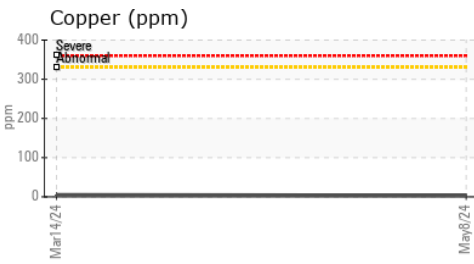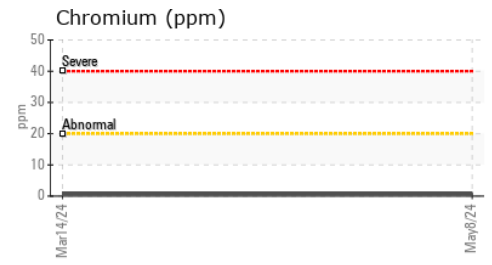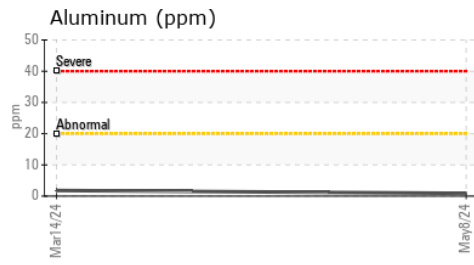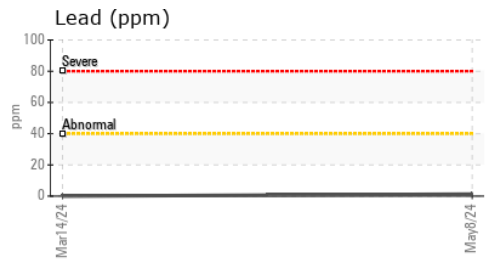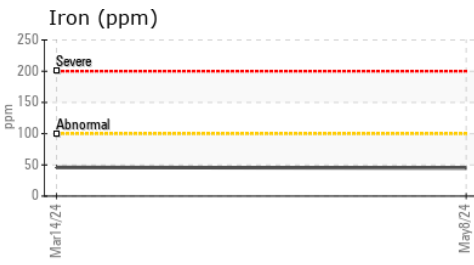

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0905899      **Received** : 14 May 2024  
**Lab Number** : 06179590      **Tested** : 15 May 2024  
**Unique Number** : 11030916      **Diagnosed** : 15 May 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**WAYNE CO SCHOOL BUS GARAGE**  
 1603 SALEM CHURCH RD  
 GOLDSBORO, NC  
 US 27530  
 Contact: BRANDON BRIGGS  
 brandonbriggs@wcps.org

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)