

NORMAL

City of Camden - Offsites [City of Camden - Offsites] A-120

Diesel Fuel

Fluid No.2 DIESEL FUEL (ULTRALOW SULPHUR) (70 GAL)

DIAGNOSIS

Recommendation

All laboratory tests indicate that this sample meets specifications for No.2 low-sulfur diesel fuel. Please note that this is a corrected copy for diagnostic comment updates.

Corrosion

All metal levels are normal indicating no corrosion in the system.

Contaminants

The water content is negligible. There is no bacteria or fungus (yeast and/or mold) indicated in the sample. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the fuel.

Fuel Condition

Sulfur value derived by ASTM D5453 method for ULSD validation.






| SAMPLE INFORM | IATION | method | limit/base | current | history1 | history2 |
|----------------------------|--------|------------------|------------|-------------|----------|----------|
| Sample Number | | Client Info | | WC06179662 | | |
| Sample Date | | Client Info | | 07 May 2024 | | |
| Machine Age | hrs | Client Info | | 0 | | |
| Sample Status | | | | NORMAL | | |
| PHYSICAL PROP | ERTIES | method | limit/base | current | history1 | history2 |
| Fuel Color | text | *Visual Screen | Yllow | Red | | |
| ASTM Color | scalar | *ASTM D1500 | | L4.0 | | |
| Pensky-Martens Flash Point | °C | *PMCC Calculated | 52 | 58.8 | | |
| SULFUR CONTER | NT | method | limit/base | current | history1 | history2 |
| Sulfur | ppm | ASTM D5185m | 10 | 44 | | |
| Sulfur (UVF) | ppm | ASTM D5453 | | 46 | | |
| DISTILLATION | | method | limit/base | current | history1 | history2 |
| Initial Boiling Point | °C | ASTM D86 | 165 | 169 | | |
| 5% Distillation Point | °C | ASTM D86 | | 191 | | |
| 10% Distill Point | °C | ASTM D86 | 201 | 200 | | |
| 15% Distillation Point | °C | ASTM D86 | | 207 | | |
| 20% Distill Point | °C | ASTM D86 | 216 | 215 | | |
| 30% Distill Point | °C | ASTM D86 | 230 | 228 | | |
| 40% Distill Point | °C | ASTM D86 | 243 | 241 | | |
| 50% Distill Point | °C | ASTM D86 | 255 | 254 | | |
| 60% Distill Point | °C | ASTM D86 | 267 | 269 | | |
| 70% Distill Point | °C | ASTM D86 | 280 | 284 | | |
| 80% Distill Point | °C | ASTM D86 | 295 | 301 | | |
| 85% Distillation Point | | ASTM D86 | | 312 | | |
| 90% Distill Point | °C | ASTM D86 | 310 | 323 | | |
| 95% Distillation Point | | ASTM D86 | | 342 | | |
| Final Boiling Point | °C | ASTM D86 | 341 | 357 | | |
| IGNITION QUALI | ΓY | method | limit/base | current | history1 | history2 |
| API Gravity | | ASTM D7777 | 37.7 | 37 | | |
| Cetane Index | | ASTM D4737 | <40.0 | 48 | | |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | <1.0 | <1 | | |
| Sodium | ppm | ASTM D5185m | <0.1 | <1 | | |
| Potassium | ppm | ASTM D5185m | <0.1 | 0 | | |
| Water | % | ASTM D6304 | <0.05 | 0.006 | | |
| ppm Water | ppm | ASTM D6304 | <500 | 67 | | |
| % Gasoline | % | *In-House | <0.50 | 0.0 | | |
| % Biodiesel | % | *In-House | <20.0 | 0.0 | | |



FUEL REPORT

FLUID CLEANLINESS method limit/base

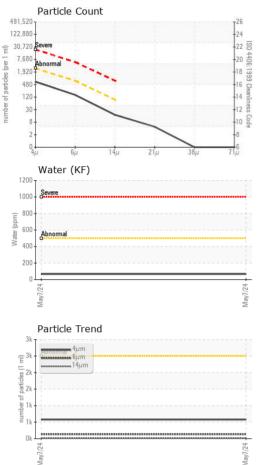

Gas Chromatography (GCD)

GCD 10%

CD 90%

Viscosity @ 40°C

400

35

300

250

200

Mav7/24


Abnorma


Ba cSt (40°C)

DCI Freeh

Abno

| FLUID GLEANLII | NESS | methoa | limit/base | | nistory i | nistory∠ |
|-----------------------|------|--------------|---------------|--------------|------------------|----------|
| Particles >4µm | | ASTM D7647 | >2500 | 578 | | |
| Particles >6µm | | ASTM D7647 | >640 | 135 | | |
| Particles >14µm | | ASTM D7647 | >80 | 15 | | |
| Particles >21µm | | ASTM D7647 | >20 | 4 | | |
| Particles >38µm | | ASTM D7647 | >4 | 0 | | |
| Particles >71µm | | ASTM D7647 | >3 | 0 | | |
| Oil Cleanliness | | ISO 4406 (c) | >18/16/13 | 16/14/11 | | |
| HEAVY METALS | | method | limit/base | current | history1 | history2 |
| Aluminum | ppm | ASTM D5185m | <0.1 | 0 | | |
| Nickel | ppm | ASTM D5185m | <0.1 | 0 | | |
| Lead | ppm | ASTM D5185m | <0.1 | 0 | | |
| Vanadium | ppm | ASTM D5185m | <0.1 | 0 | | |
| Iron | ppm | ASTM D5185m | <0.1 | 0 | | |
| Calcium | ppm | ASTM D5185m | <0.1 | 2 | | |
| Magnesium | ppm | ASTM D5185m | <0.1 | 0 | | |
| Phosphorus | ppm | ASTM D5185m | <0.1 | <1 | | |
| Zinc | ppm | ASTM D5185m | <0.1 | 0 | | |
| SAMPLE IMAGE | S | method | limit/base | current | history1 | history2 |
| Color | | | | | no image | no image |
| Bottom | | | | | no image | no image |
| GRAPHS | | | | | | |
| Fuel Distillation Cu | urve | | | Pensky-Marte | ns Flash Point (| °C) |
| Sample | | | ్ల 7 జం | | | |
| CBaseline | | | temperature ° | Base | | |
| | | | 19 4 | o L | | |
| AND 12 12 12 12 12 12 | | | | NT | | |

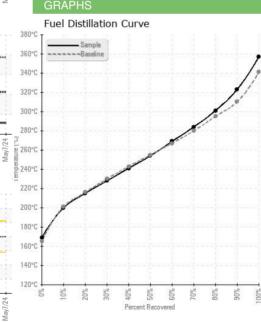

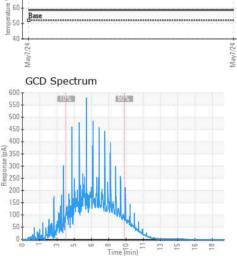



PETROLEUM RECOVERY SERVICES Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513 : WC06179662 Received 210 POWELL DR Sample No. : 14 May 2024 Lab Number : 06179662 Tested : 20 May 2024 SUMMERVILLE, SC Unique Number : 11030988 Diagnosed : 20 May 2024 - Doug Bogart US 29483 Test Package : DF-2 (Additional Tests: Fuel, Screen) Contact: AJAY EL Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369. Ajay@prsfuel.com * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. T: (843)225-1777 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: PETSUM [WUSCAR] 06179662 (Generated: 05/27/2024 12:47:26) Rev: 1

Contact/Location: AJAY EL - PETSUM

Page 2 of 2

F: