




# OIL ANALYSIS REPORT

Sample Rating Trend

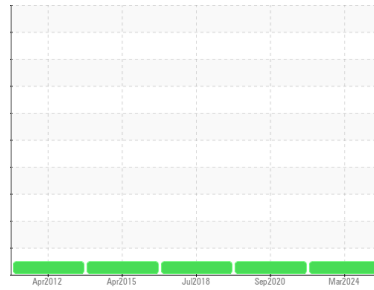

**NORMAL**



Machine Id  
**CINCINATI BRAKE-02 (S/N 48758)**  
 Component  
**Hydraulic System**  
 Fluid  
**MOBIL DTE 25 (150 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0768850</b>	WCI2320267	WCI2320261
Sample Date	Client Info		<b>26 Mar 2024</b>	01 Sep 2020	04 Jul 2018
Machine Age	hrs	Client Info	<b>52462</b>	47079	42683
Oil Age	hrs	Client Info	<b>28900</b>	20000	42683
Oil Changed	Client Info		<b>Not Changed</b>	Not Changd	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.05	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>20	<b>2</b>	2	1
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	0	0
Lead	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>20	<b>1</b>	<1	<1
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Antimony	ppm	ASTM D5185m		<b>---</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		<b>0</b>	1	<1
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Manganese	ppm	ASTM D5185m		<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m		<b>7</b>	6	6
Calcium	ppm	ASTM D5185m		<b>152</b>	152	147
Phosphorus	ppm	ASTM D5185m		<b>545</b>	495	472
Zinc	ppm	ASTM D5185m		<b>748</b>	701	642
Sulfur	ppm	ASTM D5185m		<b>8435</b>	6609	8066

## CONTAMINANTS





	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>15	<b>2</b>	1	2
Sodium	ppm	ASTM D5185m		<b>2</b>	<1	2
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	<1	<1

## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>288</b>	297	1319
Particles >6µm	ASTM D7647	>1300	<b>40</b>	98	390
Particles >14µm	ASTM D7647	>160	<b>5</b>	20	44
Particles >21µm	ASTM D7647	>40	<b>1</b>	10	14
Particles >38µm	ASTM D7647	>10	<b>0</b>	0	1
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>15/12/10</b>	15/14/11	18/16/13



# OIL ANALYSIS REPORT

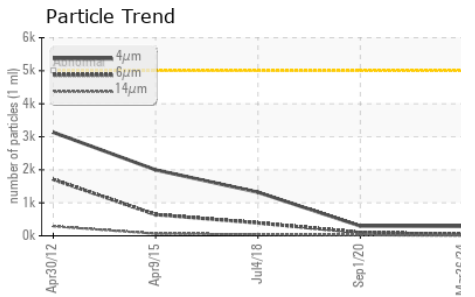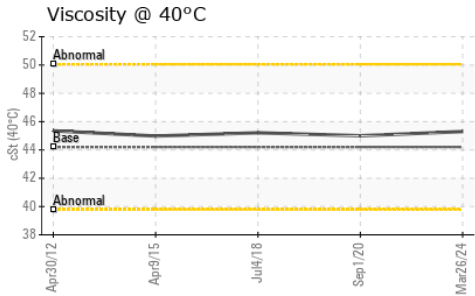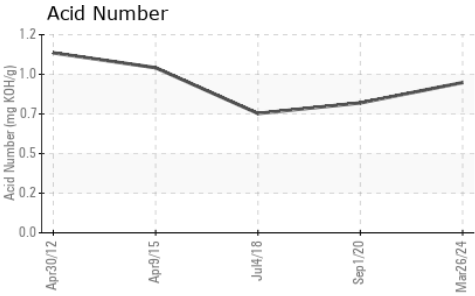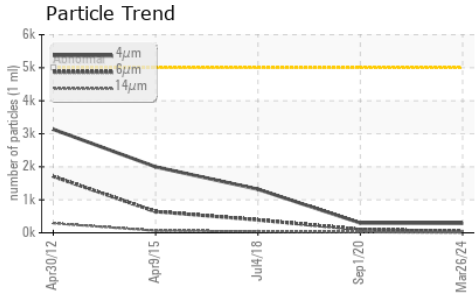


FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.91</b>	0.787	0.723






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	<b>45.3</b>	45.0	45.21

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

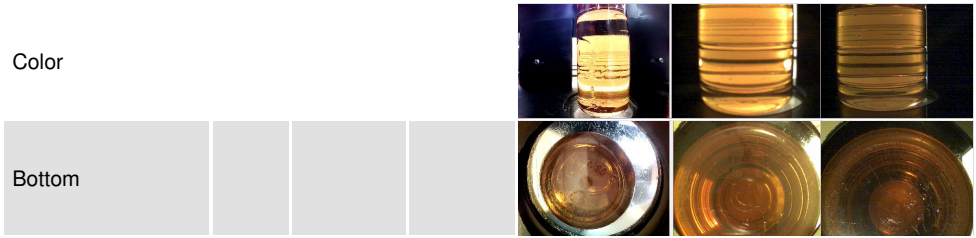

## GRAPHS

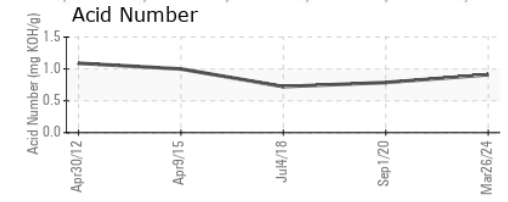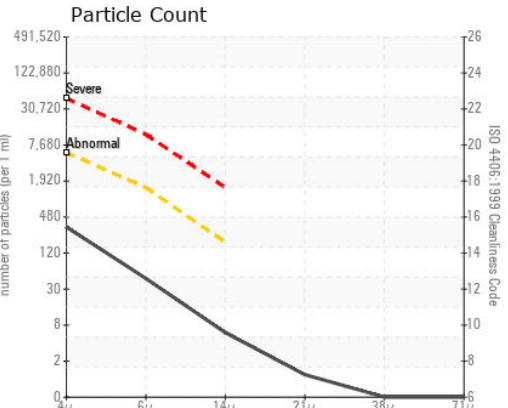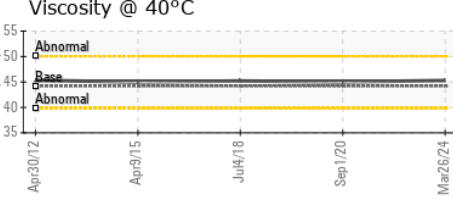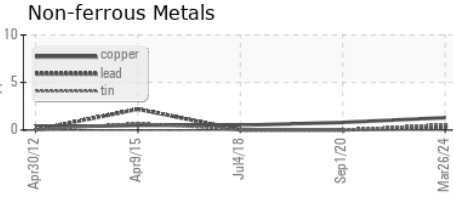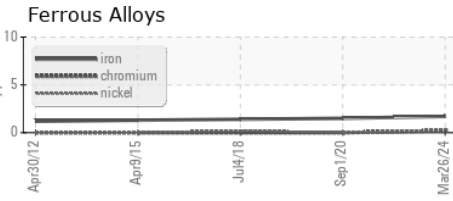

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0768850      **Received** : 15 May 2024  
**Lab Number** : **06180118**      **Tested** : 16 May 2024  
**Unique Number** : 11031444      **Diagnosed** : 17 May 2024 - Don Baldrige  
**Test Package** : IND 2

**JACO INC**  
 140 CONSTITUTION BLVD  
 FRANKLIN, MA  
 US 02038  
 Contact: RICH GONGOL  
 rgongol@jacoinc.com; rgongol@msn.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (508)446-7480  
F: (508)553-1099