

## **OIL ANALYSIS REPORT**

Sample Rating Trend

#### Machine Id

## 6000-1 (S/N A0100A0332)

Hydraulic System

## SAFETY-KLEEN PERFORMANCE PLUS HYDRAULIC AW 46 (66 GAL)

### DIAGNOSIS

#### A Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.


### Contamination


There is a high amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

### Particle Filter (Magn: 200 x)

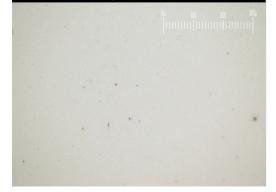

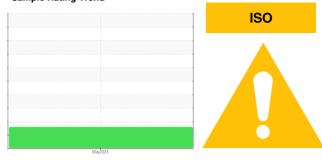

SAMPLE INFORM	<b>IATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		PH0002669		
Sample Date		Client Info		09 May 2024		
Machine Age	yrs	Client Info		1		
Oil Age	yrs	Client Info		1		
Oil Changed	,	Client Info		N/A		
Sample Status				ABNORMAL		
CONTAMINATION	N	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<1		
Chromium	ppm	ASTM D5185m	>20	<1		
Nickel	ppm	ASTM D5185m	>20	<1		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		<1		
Aluminum	ppm	ASTM D5185m	>20	2		
Lead	ppm	ASTM D5185m	>20	<1		
Copper	ppm	ASTM D5185m	>20	2		
Tin	ppm	ASTM D5185m	>20	- <1		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		<1		
	PP'''					
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		<1		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m	48	52		
Phosphorus	ppm	ASTM D5185m	340	350		
Zinc	ppm	ASTM D5185m	430	451		
Sulfur	ppm	ASTM D5185m		914		
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	2		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>640	<b>A</b> 3662		
			>640 >40	▲ 3662 ▲ 385		
Particles >6µm		ASTM D7647 ASTM D7647 ASTM D7647				
Particles >6µm Particles >14µm		ASTM D7647 ASTM D7647	>40 >10	▲ 385 ▲ 12		
Particles >6μm Particles >14μm Particles >21μm		ASTM D7647 ASTM D7647 ASTM D7647	>40 >10 >3	<ul> <li>▲ 385</li> <li>▲ 12</li> <li>3</li> </ul>		
Particles >6μm Particles >14μm Particles >21μm Particles >38μm		ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>40 >10 >3 >3	<ul> <li>▲ 385</li> <li>▲ 12</li> <li>3</li> <li>0</li> </ul>		
Particles >4µm Particles >6µm Particles >14µm Particles >38µm Particles >71µm Oil Cleanliness		ASTM D7647 ASTM D7647 ASTM D7647	>40 >10 >3	<ul> <li>▲ 385</li> <li>▲ 12</li> <li>3</li> </ul>		
Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm Oil Cleanliness		ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ISO 4406 (c)	>40 >10 >3 >3 >3 >3 >16/12/10	<ul> <li>385</li> <li>12</li> <li>3</li> <li>0</li> <li>0</li> <li>19/16/11</li> </ul>		
Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm		ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>40 >10 >3 >3 >3	<ul> <li>385</li> <li>12</li> <li>3</li> <li>0</li> <li>0</li> </ul>		


Report Id: BSHJACTN [WUSCAR] 06180123 (Generated: 05/18/2024 14:25:04) Rev: 1

Contact/Location: STEVE WILSON - BSHJACTN

Abnormal 40

38. May9/24

# **OIL ANALYSIS REPORT**

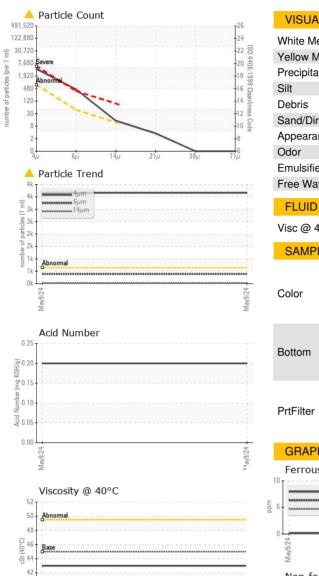

20	VISUAL		method	limit/base	current	history1	history2
1 <sup>26</sup> 24	White Metal	scalar	*Visual	NONE	NONE		
-22 8	Yellow Metal	scalar	*Visual	NONE	NONE		
	Precipitate	scalar	*Visual	NONE	NONE		
-16 Cc	Silt	scalar	*Visual	NONE	NONE		
-14	Debris	scalar	*Visual	NONE	NONE		
-22 0406:1939 Cleanliness Cod -18 99 Cleanliness Cod -14 -14 -14 -14 -14 -14 -14 -14 -14 -14	Sand/Dirt	scalar	*Visual	NONE	NONE		
-8	Appearance	scalar	*Visual	NORML	NORML		
21µ 38µ 71µ	Odor	scalar	*Visual	NORML	NORML		
	Emulsified Water	scalar	*Visual	>0.05	NEG		
	Free Water	scalar	*Visual		NEG		
	FLUID PROPERT	IES	method	limit/base	current	history1	history2
	Visc @ 40°C	cSt	ASTM D445	45.0	43.0		
	SAMPLE IMAGES	;	method	limit/base	current	history1	history2
24	Color				1525-F	no image	no image
May9,24						no image	no inage
					(CG)		
	Bottom					no image	no image
	PrtFilter					no image	no image
Mar/9/24	GRAPHS Ferrous Alloys			Pa	rticle Filter (Ma	Οµ	100 200 30
M20A	Ferrous Alloys			May9/24	rticle Filter (Ma	Οµ	100 20 <sup>30</sup> 11[11111111] 11[1111111]
	Ferrous Alloys			May9/24		Οµ	100 20 <sup>30</sup>
	Ferrous Alloys			May9/24 Ma	Acid Number	Οµ	
	Ferrous Alloys			May9/24		Οµ	100 20 <sup>30</sup>

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: STEVE WILSON - BSHJACTN

F: