

# **OIL ANALYSIS REPORT**


SAMPLE INFORMATION method

# [185214-N2STV4W]

E-11

Component Hydraulic System

**AW HYDRAULIC OIL ISO 46 (45 GAL)** 





### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.


#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	MATION	method	ilmit/base	current	nistory i	nistory2
Sample Number		Client Info		PH06180126	PH05928124	
Sample Date		Client Info		20 Feb 2024	17 Feb 2023	
Machine Age	hrs	Client Info		0	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				NORMAL	NORMAL	
CONTAMINATIO	V	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG	NEG	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<1	0	
Chromium	ppm	ASTM D5185m	>20	<1	0	
Nickel	ppm	ASTM D5185m	>20	<1	0	
Titanium	ppm	ASTM D5185m		<1	0	
Silver	ppm	ASTM D5185m		<1	<1	
Aluminum	ppm	ASTM D5185m	>20	2	0	
Lead	ppm	ASTM D5185m	>20	<1	0	
Copper	ppm	ASTM D5185m	>20	5	5	
Tin	ppm	ASTM D5185m	>20	<1	0	
Vanadium	ppm	ASTM D5185m		<1	0	
Cadmium	ppm	ASTM D5185m		<1	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0	0	
Barium	ppm	ASTM D5185m	5	0	0	
Molybdenum	ppm	ASTM D5185m	5	<1	0	
Manganese	ppm	ASTM D5185m		0	0	
Magnesium	ppm	ASTM D5185m	25	<1	<1	
Calcium	ppm	ASTM D5185m	200	47	57	
Phosphorus	ppm	ASTM D5185m	300	414	400	
Zinc	ppm	ASTM D5185m	370	491	509	
Sulfur	ppm	ASTM D5185m	2500	1183	1349	
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	5	5	
Sodium	ppm	ASTM D5185m		0	0	
Potassium	ppm	ASTM D5185m	>20	1	<1	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	201	86	
Particles >6µm		ASTM D7647	>2500	36	30	
Particles >14µm		ASTM D7647	>320	6	6	
Particles >21µm		ASTM D7647	>80	2	2	
Particles >38µm		ASTM D7647	>20	0	0	
Particles >71µm		ASTM D7647	>4	0	0	
Oil Cleanliness		ISO 4406 (c)	>20/18/15	15/12/10	14/12/10	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.42	0.39	

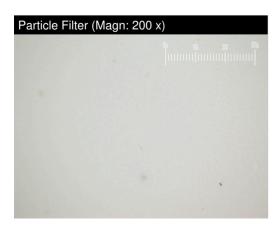


Acid Number (AN) mg KOH/g ASTM D8045 0.57 Report Id: TREPAS [WUSCAR] 06180126 (Generated: 05/18/2024 14:27:02) Rev: 1

Contact/Location: DARRYL DRUM - TREPAS



## **OIL ANALYSIS REPORT**

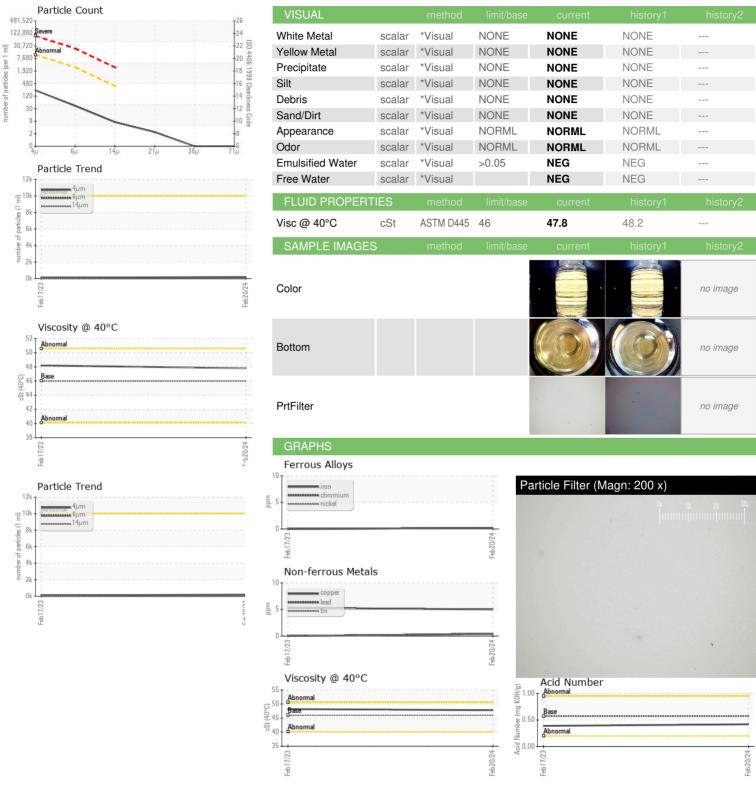





Certificate 12367

Laboratory Sample No.

Lab Number : 06180126

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : PH06180126

Unique Number : 11031452

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Received **Tested** 

: 18 May 2024 Diagnosed Test Package: PLANT (Additional Tests: PrtFilter)

: 18 May 2024 - Jonathan Hester

: 15 May 2024

PASO POBLES, CA

Contact: DARRYL DRUM DARRYL.DRUM@TRELLEBORG.COM T: (805)239-4284

TRELLEBORG HEALTHCARE AND MEDICAL

3077 ROLLIE GATE DR

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) US 93446