




OIL ANALYSIS REPORT

Sample Rating Trend

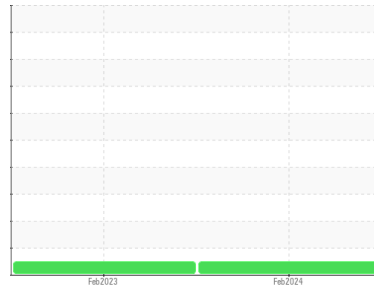

NORMAL



Area
[185108-N2STV4W]

Machine Id

E-16

Component

Hydraulic System

Fluid

AW HYDRAULIC OIL ISO 46 (45 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PH06180127	PH05928129	---
Sample Date	Client Info			20 Feb 2024	17 Feb 2023	---
Machine Age	hrs	Client Info		0	0	---
Oil Age	hrs	Client Info		0	0	---
Oil Changed	Client Info			N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.05	NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<1	0	---
Chromium	ppm	ASTM D5185m	>20	<1	0	---
Nickel	ppm	ASTM D5185m	>20	<1	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		<1	<1	---
Aluminum	ppm	ASTM D5185m	>20	2	0	---
Lead	ppm	ASTM D5185m	>20	<1	0	---
Copper	ppm	ASTM D5185m	>20	4	3	---
Tin	ppm	ASTM D5185m	>20	<1	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
Cadmium	ppm	ASTM D5185m		<1	0	---


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0	0	---
Barium	ppm	ASTM D5185m	5	0	0	---
Molybdenum	ppm	ASTM D5185m	5	<1	0	---
Manganese	ppm	ASTM D5185m		0	0	---
Magnesium	ppm	ASTM D5185m	25	1	<1	---
Calcium	ppm	ASTM D5185m	200	72	57	---
Phosphorus	ppm	ASTM D5185m	300	530	375	---
Zinc	ppm	ASTM D5185m	370	669	508	---
Sulfur	ppm	ASTM D5185m	2500	2852	2306	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	5	4	---
Sodium	ppm	ASTM D5185m		<1	0	---
Potassium	ppm	ASTM D5185m	>20	1	<1	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	283	790	---
Particles >6µm		ASTM D7647	>2500	48	239	---
Particles >14µm		ASTM D7647	>320	9	30	---
Particles >21µm		ASTM D7647	>80	3	10	---
Particles >38µm		ASTM D7647	>20	1	1	---
Particles >71µm		ASTM D7647	>4	0	0	---
Oil Cleanliness		ISO 4406 (c)	>20/18/15	15/13/10	17/15/12	---





FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.44	0.46	---

Particle Filter (Magn: 200 x)

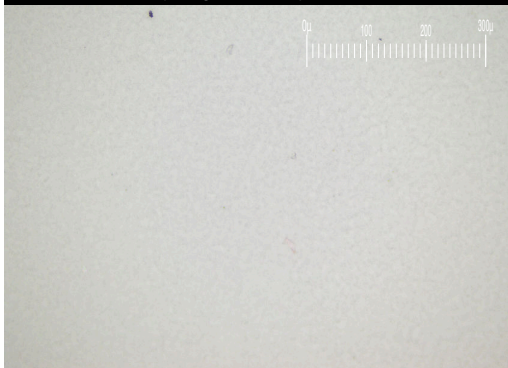



OIL ANALYSIS REPORT

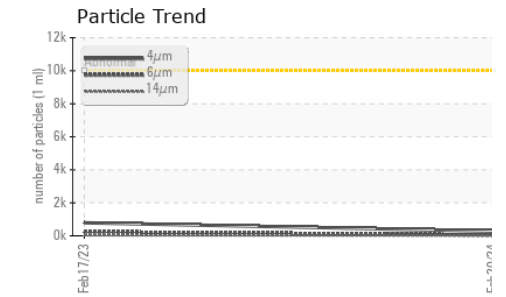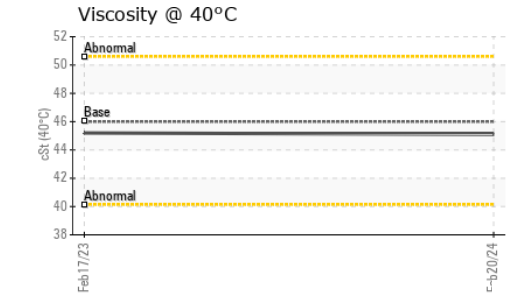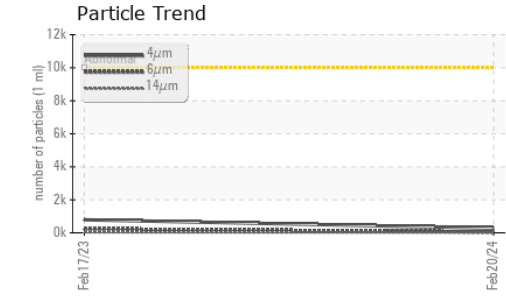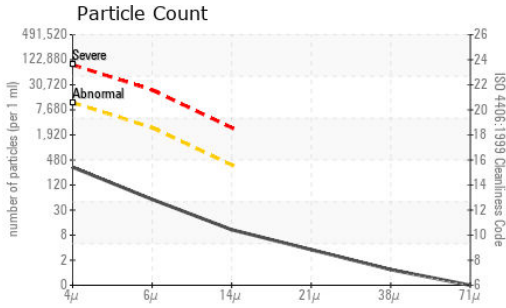

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PH06180127 **Received** : 15 May 2024
Lab Number : **06180127** **Tested** : 18 May 2024
Unique Number : 11031453 **Diagnosed** : 18 May 2024 - Jonathan Hester
Test Package : PLANT (Additional Tests: PrtFilter)

TRELLEBORG HEALTHCARE AND MEDICAL
 3077 ROLLIE GATE DR
 PASO POBLES, CA
 US 93446
 Contact: DARRYL DRUM
 DARRYL.DRUM@TRELLEBORG.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	45.1	45.2	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					no image
Bottom					no image
PrtFilter					no image

GRAPHS

