

OIL ANALYSIS

FLUID (Particles > Particles > Particles > Particles >21µm

Particles >38µm

Particles >71µm

Oil Cleanliness

Acid Number (AN)

FLUID DEGRADATION

SSK [AFTER FILTER] TK1 HOMO 1 WEST (S/N J3-20.1

Refrigeration Compressor

LUBRIPLATE SFGO ULTRA 100 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. We recommend an early resample to monitor this condition.

A Wear

The iron level is abnormal.

Contamination

There is a moderate amount of silt (particulates < 6 microns in size) present in the oil. There is a trace of moisture present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Samp	le Rating Tre	end		
SIS REPO	ORT		_			WATER
			-			
3-20.122)						
		-				
			May2024	May2024		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0011865	USP0011867	
Sample Date		Client Info		09 May 2024	08 May 2024	
Machine Age	hrs	Client Info		0	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				ABNORMAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	4 9	60	
Chromium	ppm	ASTM D5185m	>2	<1	<1	
Nickel	ppm	ASTM D5185m		<1	<1	
Titanium	ppm	ASTM D5185m		<1	<1	
Silver	ppm	ASTM D5185m	>2	<1	<1	
Aluminum	ppm	ASTM D5185m	>3	2	2	
Lead	ppm	ASTM D5185m	>2	1	2	
Copper	ppm	ASTM D5185m		2	2	
Tin	ppm	ASTM D5185m	>4	2	2	
Vanadium	ppm	ASTM D5185m	~1	<1	<1	
Cadmium	ppm	ASTM D5185m		<1	<1	
	ppm					
ADDITIVES		method	limit/base		history1	history2
Boron	ppm	ASTM D5185m		0	0	
Barium	ppm	ASTM D5185m		0	0	
Molybdenum	ppm	ASTM D5185m		<1	<1	
Manganese	ppm	ASTM D5185m		0	0	
Magnesium	ppm	ASTM D5185m		<1	<1	
Calcium	ppm	ASTM D5185m		<1	<1	
Phosphorus	ppm	ASTM D5185m		711	707	
Zinc	ppm	ASTM D5185m		0	0	
Sulfur	ppm	ASTM D5185m		1949	1968	
CONTAMINANT	S	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	2	2	
Sodium	ppm	ASTM D5185m		0	3	
Potassium	ppm	ASTM D5185m	>20	1	2	
Water	%	ASTM D6304	>0.01	<u> </u>	▲ 0.027	
ppm Water	ppm	ASTM D6304	>100	112	A 272	
FLUID CLEANLI	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	e 12153	▲ 157387	
Particles >6µm		ASTM D7647	>2500	1957	▲ 89577	
Particles >14µm		ASTM D7647	>640	32	4 2467	
Deutlates Of			100	-	101	

ASTM D7647 >160

ASTM D7647 >10

ASTM D7647

ISO 4406 (c)

method

mg KOH/g ASTM D974

>40

>20/18/16

limit/base

5

0

0

21/18/12

0.19

current

181

1 0

24/24/18


0.20


history1

history2



OIL ANALYSIS REPORT

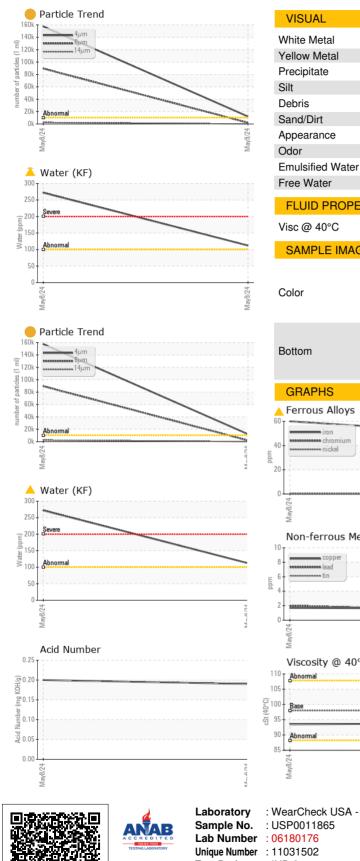

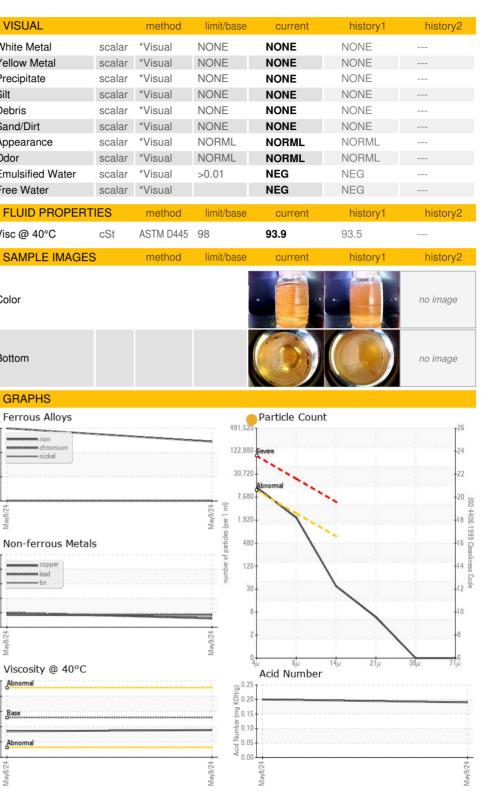



: WearCheck USA - 501 Madison Ave., Cary, NC 27513 KraftHeinz - Champaign - Plant 8318 702 N MATTHIS AVE, DOOR 22 EAST STOREROOM Received : 15 May 2024 : 16 May 2024 CHAMPAIGN, IL Tested Diagnosed : 18 May 2024 - Jonathan Hester US 61821 Test Package : IND 2 **Contact: Nathan Shankles** Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369. Nathan.Shankles@kraftheinz.com * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. T: Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: KRACHA [WUSCAR] 06180176 (Generated: 05/18/2024 14:37:03) Rev: 1

Contact/Location: Nathan Shankles - KRACHA

F: