

OIL ANALYSIS REPORT

Area SSK [BEFORE FILTER] Machine Id [BEFORE FILTER] TK1 HOMO 1 WEST (S/N J3-20.122) Component

Refrigeration Compressor

LUBRIPLATE SFGO ULTRA 100 (--- GAL)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. We recommend an early resample to monitor this condition.

🔺 Wear


The iron level is abnormal.

Contamination

There is a high amount of particulates present in the oil. There is a trace of moisture present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

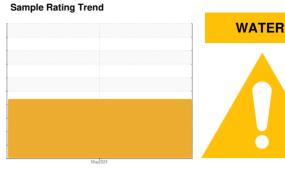

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0011867		
Sample Date		Client Info		08 May 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	<u> </u>		
Chromium	ppm	ASTM D5185m	>2	<1		
Nickel	ppm	ASTM D5185m		<1		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m	>2	<1		
Aluminum	ppm	ASTM D5185m	>3	2		
Lead	ppm	ASTM D5185m	>2	2		
Copper	ppm	ASTM D5185m	>8	2		
Tin	ppm	ASTM D5185m	>4	2		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		<1		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		<1		
Phosphorus	ppm	ASTM D5185m		707		
Zinc	ppm	ASTM D5185m		0		
Sulfur	ppm	ASTM D5185m		1968		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	2		
Sodium	ppm	ASTM D5185m		3		
Potassium	ppm	ASTM D5185m	>20	2		
Water	%	ASTM D6304	>0.01	<u> </u>		
ppm Water	ppm	ASTM D6304	>100	<u> </u>		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	<u> </u>		
Particles >6µm		ASTM D7647	>2500	<u> </u>		
Particles >14µm		ASTM D7647	>640	467		
Particles >21µm		ASTM D7647	>160	<u> </u>		
Particles >38µm		ASTM D7647	>40	1		
Particles >71µm		ASTM D7647	>10	0		
Oil Cleanliness		ISO 4406 (c)	>20/18/16	A 24/24/18		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2


Acid Number (AN) mg

mg KOH/g ASTM D974

Contact/Location: Nathan Shankles - KRACHA Page 1 of 2



OIL ANALYSIS REPORT

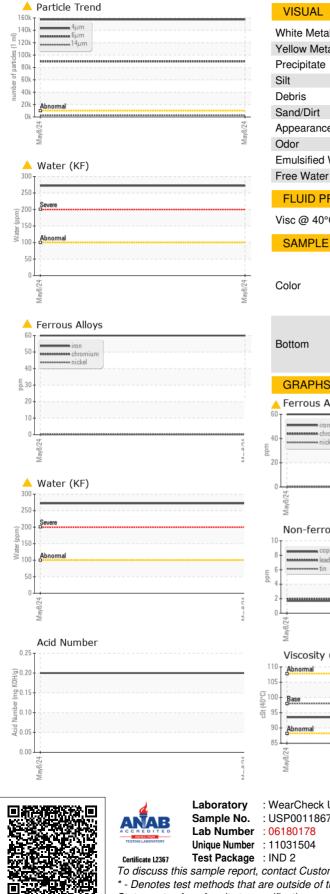

VISUAL		method	limit/base	current	history1	history2
	ooclas					
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.01	NEG		
Free Water	scalar	*Visual		NEG		
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	98	93.5		
SAMPLE IMAGES	6	method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image
GRAPHS						
Ferrous Alloys			- 491,520	Particle Count	t	т26
Non-ferrous Metals	5		122,880 30,720 7,680 7,680 1,920 480 1,920 480 120 9 Jan 120 30 30 120 480 30 120 480 30 120 9 Jan 120 30 30 120 9 Jan 1920 9 Jan 1920 9 10 1920 100 100 100 100 100 100 100 100 100 1	Abnomal	14μ 21μ	-24 -22 -20 -18 -16 -16 -10 -10 -10 -10 -8 -36μ -71μ
VearCheck USA - 501 JSP0011867 6180178 1031504	l Madiso Recei Teste Diagr	ved : 15 d : 16	May8/24	702 N MA	einz - Champaig ITHIS AVE, DOOR 22 C	
1031504 ND 2 ntact Customer Servi	-	losed :18	-		Contact: Na	athan Shankles

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: KRACHA [WUSCAR] 06180178 (Generated: 05/18/2024 14:40:07) Rev: 1

Contact/Location: Nathan Shankles - KRACHA

Nathan.Shankles@kraftheinz.com

Т:

F: