




# OIL ANALYSIS REPORT

Sample Rating Trend

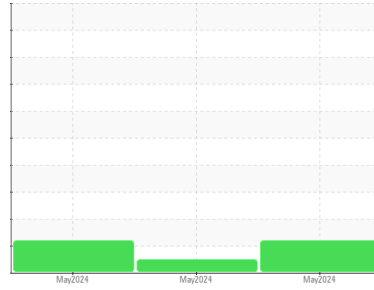

ISO



Machine Id

## BONE CANNON 1

Component

### Hydraulic System

Fluid

### AW HYDRAULIC OIL ISO 46 (--- GAL)

#### DIAGNOSIS

##### Recommendation

Resample at the next service interval to monitor.

##### Wear

All component wear rates are normal.

##### Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

##### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

#### SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>USP0011881</b>	USP0011891	USP0011884
Sample Date	Client Info	<b>14 May 2024</b>	13 May 2024	13 May 2024
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>ABNORMAL</b>	---	ABNORMAL

#### WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >20	<b>2</b>	2	2
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	2	2
Lead	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185m >20	<b>12</b>	12	12
Tin	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1

#### ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 5	<b>0</b>	0	0
Barium	ppm	ASTM D5185m 5	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 5	<b>&lt;1</b>	<1	<1
Manganese	ppm	ASTM D5185m	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m 25	<b>1</b>	1	1
Calcium	ppm	ASTM D5185m 200	<b>27</b>	34	32
Phosphorus	ppm	ASTM D5185m 300	<b>320</b>	314	323
Zinc	ppm	ASTM D5185m 370	<b>273</b>	284	285
Sulfur	ppm	ASTM D5185m 2500	<b>862</b>	837	850

#### CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >15	<b>2</b>	1	1
Sodium	ppm	ASTM D5185m	<b>30</b>	38	34
Potassium	ppm	ASTM D5185m >20	<b>2</b>	3	2
Water	%	ASTM D6304 >0.05	<b>0.008</b>	0.017	0.019
ppm Water	ppm	ASTM D6304 >500	<b>87</b>	174	199

#### FLUID CLEANLINESS






method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	<b>▲ 13866</b>	---	▲ 15307
Particles >6µm	ASTM D7647 >1300	<b>● 1581</b>	---	● 1790
Particles >14µm	ASTM D7647 >160	<b>88</b>	---	140
Particles >21µm	ASTM D7647 >40	<b>26</b>	---	50
Particles >38µm	ASTM D7647 >10	<b>2</b>	---	6
Particles >71µm	ASTM D7647 >3	<b>0</b>	---	0
Oil Cleanliness	ISO 4406 (c) >19/17/14	<b>▲ 21/18/14</b>	---	▲ 21/18/14

#### FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045 0.57	<b>0.21</b>	0.21	0.20




# OIL ANALYSIS REPORT

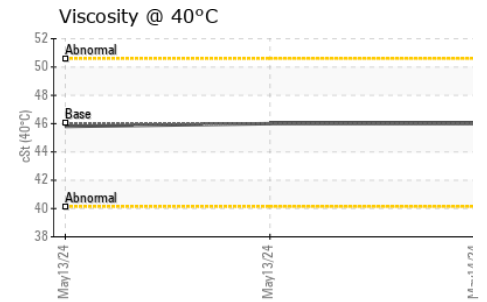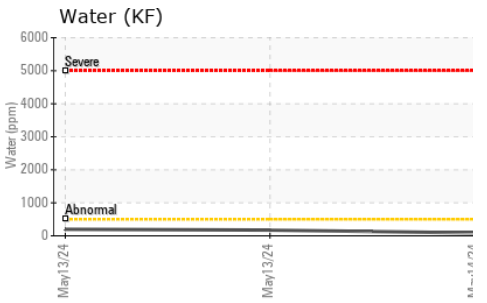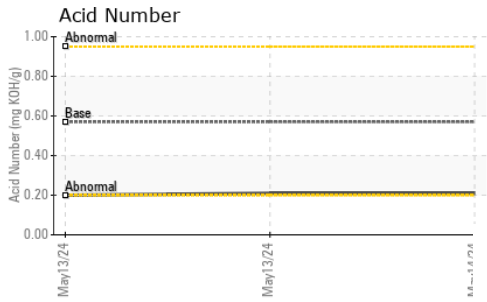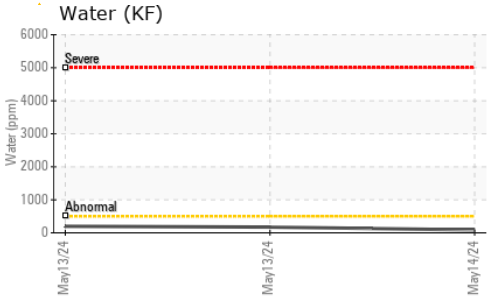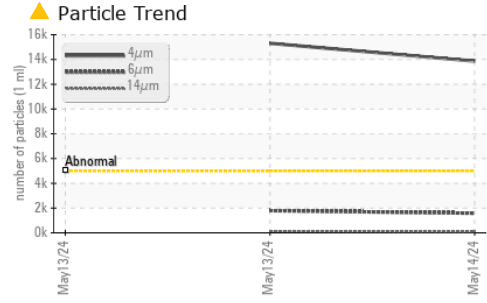






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	46.0	46.0	45.8

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

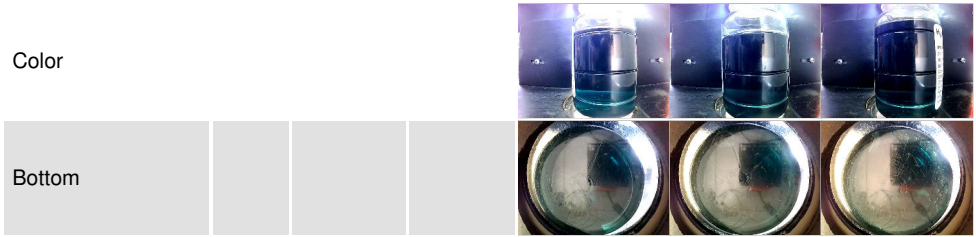

## GRAPHS

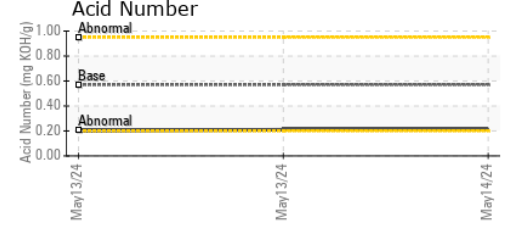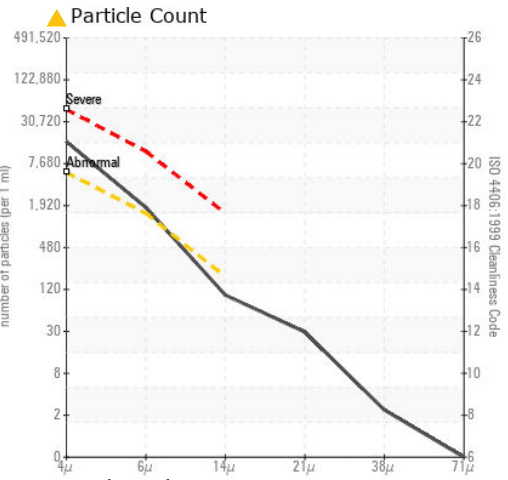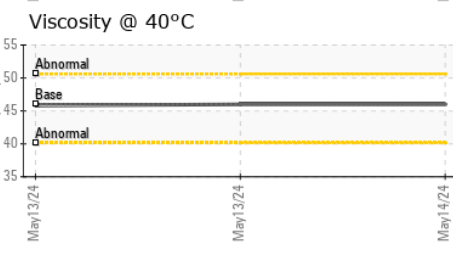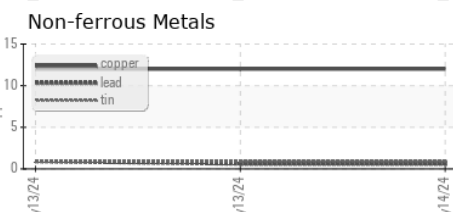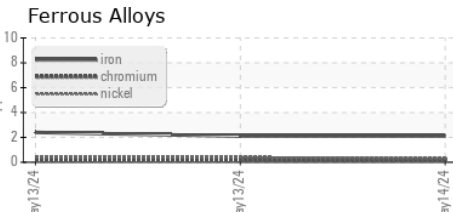

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : USP0011881      **Received** : 15 May 2024  
**Lab Number** : 06180195      **Tested** : 16 May 2024  
**Unique Number** : 11031521      **Diagnosed** : 17 May 2024 - Doug Bogart  
**Test Package** : IND 2

**SMITHFIELD FOOD - TARHEEL**  
 15855 HWY. 87 WEST  
 TARHEEL, NC  
 US 28392  
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)