


OIL ANALYSIS REPORT

AIRLUBE 228 [DA519] ATLAS COPCO API606-557 - AK BOF

Component Compressor





Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		UCH06180254	UCH05984897	UCH05772106
Sample Date		Client Info		17 Apr 2024	13 Sep 2023	20 Jan 2023
Machine Age	hrs	Client Info		101232	76846	92931
Oil Age	hrs	Client Info		6475	2088	2325
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINATION	V	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	1	<1	0
Chromium	ppm	ASTM D5185m	>5	0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>15	10	10	0
Lead	ppm	ASTM D5185m	>65	0	0	0
Copper	ppm	ASTM D5185m	>65	8	8	<1
Tin	ppm	ASTM D5185m	>10	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	1.5	0	0	0
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m	0.3	0	<1	0
Magnesium	ppm	ASTM D5185m	0	0	0	0
Calcium	ppm	ASTM D5185m	0	<1	2	0
Phosphorus	ppm	ASTM D5185m	406	123	98	32
Zinc	ppm	ASTM D5185m	0	18	14	0
Sulfur	ppm	ASTM D5185m	1283	0	16	0
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>35	0	0	<1
Sodium	ppm	ASTM D5185m		2	3	<1
Potassium	ppm	ASTM D5185m	>20	<1	<1	0
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.463	0.97	0.452	0.66



OIL ANALYSIS REPORT

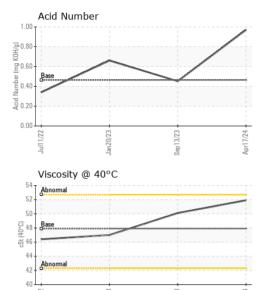

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	47.9	51.9	50.1	47.0
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color					. fi.	

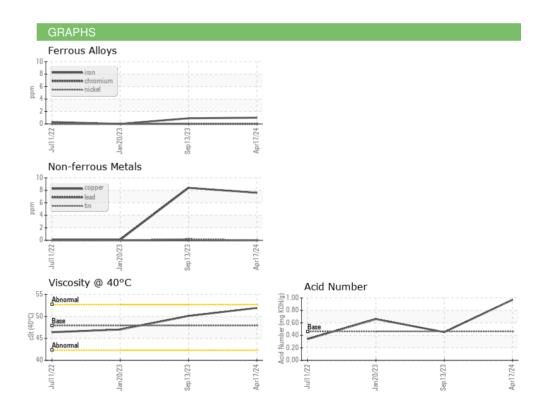





Certificate 12367

Laboratory Sample No.

Lab Number : 06180254 Unique Number : 11031580 Test Package : IND 2

Bottom

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : UCH06180254

Received : 15 May 2024 **Tested**

: 16 May 2024 Diagnosed

: 17 May 2024 - Wes Davis

Contact: Josh Oaks josh.oaks@aircompressors.com T:

AIR TECHNOLOGIES INC (MID)

400 WRIGHT AVE

MIDDLETOWN, OH

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (513)539-6040

Report Id: UCAIRMID [WUSCAR] 06180254 (Generated: 05/17/2024 14:02:36) Rev: 1

Contact/Location: Josh Oaks - UCAIRMID

US 45044