

OIL ANALYSIS REPORT

Sample Rating Trend

ISO

Area METRO Machine Id METRO 25005 Component

Rear Differential Fluid {not provided} (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		WC0934530		
Sample Date		Client Info		02 Feb 2024		
Machine Age	mls	Client Info		7		
Oil Age	mls	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	14		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m	>10	<1		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		<1		
Aluminum	ppm	ASTM D5185m	>25	2		
Lead	ppm	ASTM D5185m	>25	<1		
Copper	ppm	ASTM D5185m	>100	<1		
Tin	ppm	ASTM D5185m	>10	<1		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		314		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		<1		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		5		
Calcium	ppm	ASTM D5185m		1		
Phosphorus	ppm	ASTM D5185m		1726		
Zinc	ppm	ASTM D5185m		0		
Sulfur	ppm	ASTM D5185m		29578		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	6		
Sodium	ppm	ASTM D5185m		<1		
Potassium	ppm	ASTM D5185m	>20	1		
Water	%	ASTM D6304	>.2	0.043		
ppm Water	ppm	ASTM D6304	>2000	433		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	0 31041		
Particles >6µm		ASTM D7647	>5000	<mark> </mark> 5976		
Particles >14µm		ASTM D7647	>640	287		
Particles >21µm		ASTM D7647	>160	60		
Particles >38µm		ASTM D7647	>40	2		
Particles >71µm		ASTM D7647	>10	0		
Oil Cleanliness		ISO 4406 (c)	>21/19/16	e 22/20/15		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		2.67		



OIL ANALYSIS REPORT





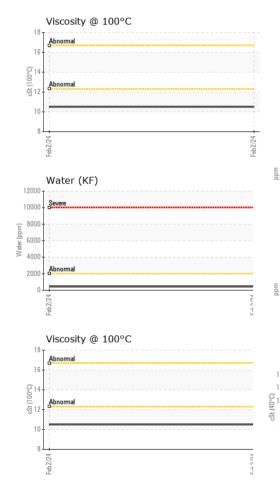

Ĕ

	VISUAL						
	White Metal	scalar	*Visual	NONE	NONE		
	Yellow Metal	scalar	*Visual	NONE	NONE		
	Precipitate	scalar	*Visual	NONE	NONE		
	Silt	scalar	*Visual	NONE	NONE		
	Debris	scalar	*Visual	NONE	NONE		
	Sand/Dirt	scalar	*Visual	NONE	NONE		
Feb 2/24	Appearance	scalar	*Visual	NORML	NORML		
Feb	Odor	scalar	*Visual	NORML	NORML		
	Emulsified Water	scalar	*Visual	>.2	NEG		
	Free Water	scalar	*Visual		NEG		
	FLUID PROPER	TIES	method	limit/base	current	history1	history2
	Visc @ 40°C	cSt	ASTM D445		59.2		
	Visc @ 100°C	cSt	ASTM D445		10.5		
1	Viscosity Index (VI)	Scale	ASTM D2270		168		
	SAMPLE IMAGES			limit/base			history?
Feb2/24 -	SAMPLE IMAGE	5	method	iimit/base	current	history1	history2
<u>2</u>	Color					no image	no image
	Bottom					no image	no image
Feb2/24	Ferrous Alloys			491,521	Severe Abnormal		-24 -22 -22
	Non-ferrous Metal	s		480 480 480 480 480 120 120 120 120 120 120 120 12			-20 -18 -16 -14 -12
5	to copper te d			ljo Josepunne 3(\nearrow	-14 -12
<i>ис</i> тта	2			Feb2/24			8
	Viscosity @ 40°C			() () () () () () () () () () () () () (Acid Number	14μ 21μ	36µ 71µ
	60			.1.0 Acid Numbe	24		
עניים	Feb 2/24			Feb2/24	Feb2/24		
Laboratory Sample No. Lab Number	: WearCheck USA - 50 : WC0934530 · : 06180642	1 Madiso Recei Teste	i ved : 15	, NC 27513 May 2024 May 2024	E		A CREDARO FE PLAINS R RYTOWN, N

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: bastarhd [WUSCAR] 06180642 (Generated: 05/18/2024 16:48:25) Rev: 1

Contact/Location: GIANNA CREDAROLI - BASTARHD

F: