

## **OIL ANALYSIS REPORT**

Area DICK LAVY DICK LAVY LN215617

Front Differential Fluid {not provided} (--- GAL)

### DIAGNOSIS

#### A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please note that this is a corrected copy for laboratory data updates to ICP data.

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

#### Fluid Condition

Confirm oil type. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Jan2024		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0934558		
Sample Date		Client Info		25 Jan 2024		
Machine Age	mls	Client Info		409342		
Oil Age	mls	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	180		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m	>10	0		
Titanium	ppm	ASTM D5185m	210	0		
Silver		ASTM D5185m		0		
	ppm		. 05	-		
Aluminum	ppm	ASTM D5185m		<1		
Lead	ppm	ASTM D5185m	>25	0		
Copper	ppm	ASTM D5185m		<1		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		77		
Barium	ppm	ASTM D5185m		<1		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		10		
Magnesium	ppm	ASTM D5185m		142		
Calcium	ppm	ASTM D5185m		3		
Phosphorus	ppm	ASTM D5185m		1593		
Zinc	ppm	ASTM D5185m		0		
Sulfur	ppm	ASTM D5185m		25226		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon		ASTM D5185m		29		
Sodium	ppm	ASTM D5185m	>15	5		
	ppm		00	-		
Potassium	ppm	ASTM D5185m		0		
Water ppm Water	%	ASTM D6304 ASTM D6304	>.2 >2000	0.048 481		
	ppm				historyd	
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	▲ 118873 ▲ 20200		
Particles >6µm		ASTM D7647	>5000	A 29309		
Particles >14µm		ASTM D7647	>640	105		
Particles >21µm		ASTM D7647		18		
Particles >38µm		ASTM D7647	>40	1		
Particles >71µm		ASTM D7647	>10	1		
Oil Cleanliness		ISO 4406 (c)	>21/19/16	<b>A</b> 24/22/14		
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.82		

Contact/Location: GIANNA CREDAROLI - BASTARHD Page 1 of 2

Sample Rating Trend

ISO



Water

Nater (

# **OIL ANALYSIS REPORT**

limit/base

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

limit/base

limit/base

491.57

122.88

30.72

7 68

480

120

31

Jan25/24

per 1 1.920

>.2

current

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

curren

current

Particle Count

NEG

NEG

57.3

10.2

167

history1

history

history1

no image

no image

history2

history

history2

no image


no image

20 20

18 1999 Cle

16

1400

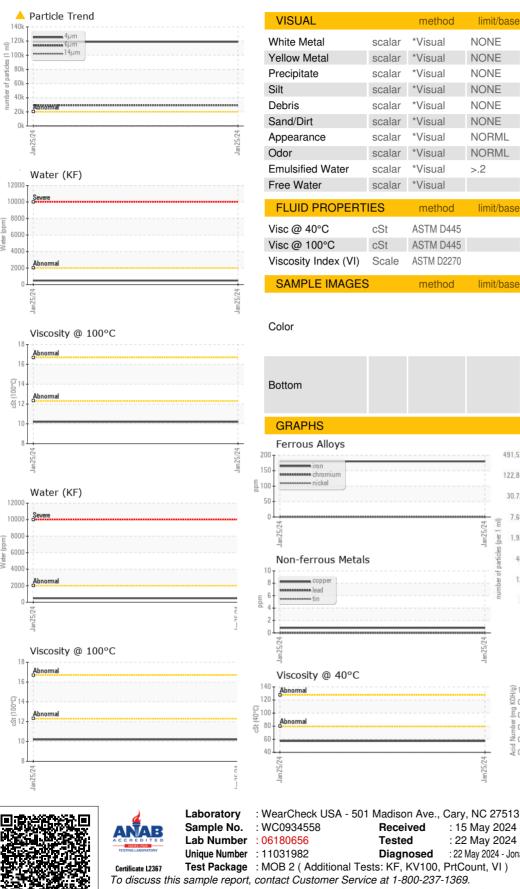

Acid Number (B/H0) KOH 0.8 ٥.6 <u>ق</u> Jaqua 0.4 Nump 0.0 Acid an 25 **BASF - GIANNA CREDAROLI** : 15 May 2024 500 WHITE PLAINS RD : 22 May 2024 TARRYTOWN, NY : 22 May 2024 - Jonathan Hester US 10591 Contact: GIANNA CREDAROLI gianna.credaroli@basf.com

214

38

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: BASTARHD [WUSCAR] 06180656 (Generated: 05/22/2024 12:46:16) Rev: 2

Contact/Location: GIANNA CREDAROLI - BASTARHD

T:

F: