

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

KAESER SX 5 A/C 4619187 (S/N 1174)

Component Compressor

KAESER SIGMA (OEM) S-460 (--- QTS)

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| | | Apr2017 Deca | 017 Sep2018 May2019 | Sep 2020 Oct2021 Oct2022 | Oct2023 | |
|--------------------------|------------|--------------|---------------------|--------------------------|-------------|-------------------|
| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | KCPA006098 | KC06005653 | KCP54402 |
| Sample Date | | Client Info | | 14 Mar 2024 | 06 Oct 2023 | 16 Mar 2023 |
| Machine Age | hrs | Client Info | | 57923 | 55494 | 52059 |
| Oil Age | hrs | Client Info | | 0 | 0 | 3000 |
| Oil Changed | | Client Info | | N/A | N/A | Not Changd |
| Sample Status | | | | NORMAL | NORMAL | ABNORMAL |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >50 | <1 | <1 | 1 |
| Chromium | ppm | ASTM D5185m | >10 | <1 | <1 | 0 |
| Nickel | ppm | ASTM D5185m | >3 | <1 | <1 | 0 |
| Titanium | ppm | ASTM D5185m | >3 | <1 | <1 | 0 |
| Silver | ppm | ASTM D5185m | >2 | <1 | <1 | 0 |
| Aluminum | ppm | ASTM D5185m | >10 | 2 | 2 | <1 |
| Lead | ppm | ASTM D5185m | >10 | <1 | <1 | 0 |
| Copper | ppm | ASTM D5185m | >50 | 4 | 13 | 4 |
| Tin | ppm | ASTM D5185m | >10 | <1 | <1 | 0 |
| Vanadium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | <1 | <1 | 0 |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Barium | ppm | ASTM D5185m | 90 | 19 | <1 | 24 |
| Molybdenum | ppm | ASTM D5185m | | <1 | <1 | 0 |
| Manganese | ppm | ASTM D5185m | | 0 | 0 | <1 |
| Magnesium | ppm | ASTM D5185m | 90 | 53 | 16 | 56 |
| Calcium | ppm | ASTM D5185m | 2 | 1 | <1 | 1 |
| Phosphorus | ppm | ASTM D5185m | | 1 | 6 | 5 |
| Zinc | ppm | ASTM D5185m | | 6 | 0 | 11 |
| Sulfur | ppm | ASTM D5185m | | 20621 | 18756 | 20174 |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >25 | <1 | <1 | <1 |
| Sodium | ppm | ASTM D5185m | | 10 | 5 | 23 |
| Potassium | ppm | ASTM D5185m | >20 | 2 | 2 | 2 |
| Water | % | ASTM D6304 | >0.05 | 0.024 | 0.007 | 0.014 |
| ppm Water | ppm | ASTM D6304 | >500 | 246 | 73.5 | 149.5 |
| FLUID CLEANLIN | IESS | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | | 2234 | 3338 | 51820 |
| Particles >6µm | | ASTM D7647 | >1300 | 631 | 927 | <u>▲</u> 18977 |
| Particles >14μm | | ASTM D7647 | >80 | 32 | 57 | ▲ 1903 |
| Particles >21µm | | ASTM D7647 | >20 | 7 | 16 | △ 455 |
| Particles >38μm | | ASTM D7647 | >4 | 0 | 1 | <u>▲</u> 52 |
| Particles >71μm | | ASTM D7647 | >3 | 0 | 0 | <u>4</u> |
| Oil Cleanliness | | ISO 4406 (c) | >/17/13 | 18/16/12 | 19/17/13 | <u>△</u> 23/21/18 |
| FLUID DEGRADA | TION | method | limit/base | current | history1 | history2 |
| A adal Nicosala au (ANI) | ma 1/011/- | ACTM DODAE | 0.4 | 0.20 | 0.00 | 0.00 |

Acid Number (AN)

mg KOH/g ASTM D8045 0.4


0.20

0.32

0.28



OIL ANALYSIS REPORT

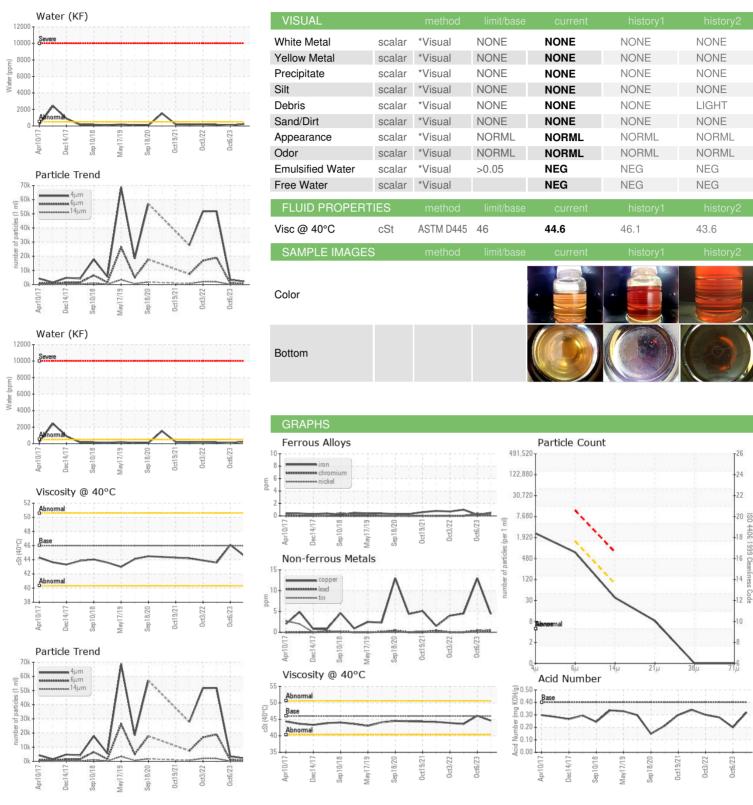





Certificate 12367

Laboratory Sample No.

Lab Number Unique Number : 11031996

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : KCPA006098 Received **Tested** : 06180670

Diagnosed Test Package : IND 2 (Additional Tests: KF, PrtCount)

: 18 May 2024 : 18 May 2024 - Jonathan Hester

: 15 May 2024

OLD DOMINION 5950 STICKNEY RD TOLEDO, OH US 43612 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: