




# OIL ANALYSIS REPORT

Sample Rating Trend

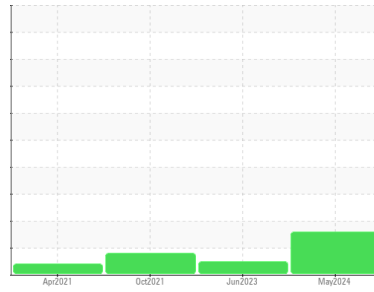

**WEAR**



Machine Id  
**KAESER 5160845**  
 Component  
**Compressor**  
 Fluid  
**KAESER SIGMA (OEM) M-460 (--- GAL)**

**DIAGNOSIS**

**Recommendation**  
 Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

**Wear**  
 The aluminum level is abnormal. All other component wear rates are normal.

**Contamination**  
 There is a high amount of silt (particulates < 14 microns in size) present in the oil.

**Fluid Condition**  
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KCPA013559</b>	KCPA005713	KCP39356
Sample Date	Client Info			<b>09 May 2024</b>	22 Jun 2023	06 Oct 2021
Machine Age	hrs	Client Info		<b>39571</b>	36486	32761
Oil Age	hrs	Client Info		<b>4847</b>	0	3760
Oil Changed	Client Info			<b>Changed</b>	N/A	Changed
Sample Status				<b>ABNORMAL</b>	NORMAL	ATTENTION

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	0	<1
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>3	<1	0	<1
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	<1	0	<1
Aluminum	ppm	ASTM D5185m	>10	<b>▲ 11</b>	<1	<1
Lead	ppm	ASTM D5185m	>10	<1	0	0
Copper	ppm	ASTM D5185m	>50	<b>2</b>	7	9
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Antimony	ppm	ASTM D5185m		---	---	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>0</b>	0	8
Barium	ppm	ASTM D5185m	90	<b>1</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<1	0	0
Manganese	ppm	ASTM D5185m		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m	100	<b>30</b>	23	7
Calcium	ppm	ASTM D5185m	0	<1	0	<1
Phosphorus	ppm	ASTM D5185m	0	<1	1	2
Zinc	ppm	ASTM D5185m	0	<b>22</b>	35	14
Sulfur	ppm	ASTM D5185m	23500	<b>24477</b>	20777	17535


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>7</b>	11	<1
Sodium	ppm	ASTM D5185m		<b>2</b>	2	<1
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	<1	1
Water	%	ASTM D6304	>0.05	<b>0.013</b>	0.006	0.007
ppm Water	ppm	ASTM D6304	>500	<b>136</b>	60.9	74.3

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>7590</b>	7789	6096
Particles >6µm		ASTM D7647	>1300	<b>▲ 2902</b>	1160	● 1608
Particles >14µm		ASTM D7647	>80	<b>42</b>	44	● 98
Particles >21µm		ASTM D7647	>20	<b>8</b>	10	17
Particles >38µm		ASTM D7647	>4	<b>0</b>	0	0
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>--/17/13	<b>▲ 20/19/13</b>	20/17/13	● 18/14


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	<b>0.48</b>	0.46	0.407

# OIL ANALYSIS REPORT


### ▲ Particle Trend

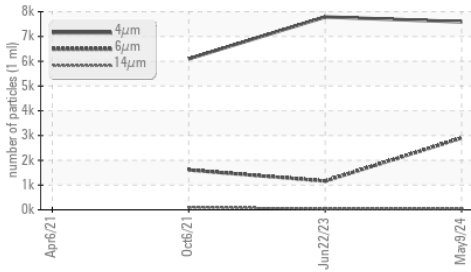


### ▲ Aluminum (ppm)

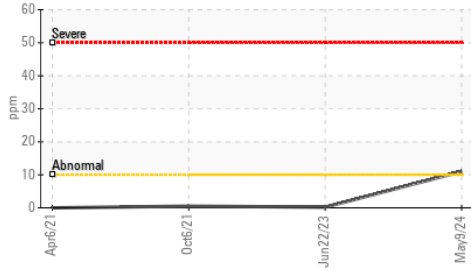


### Water (KF)

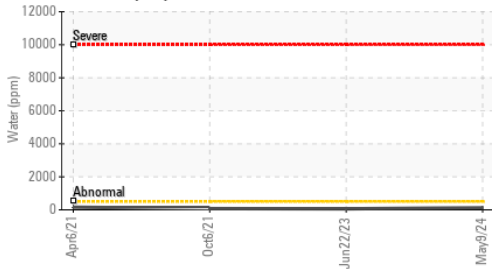

### Acid Number

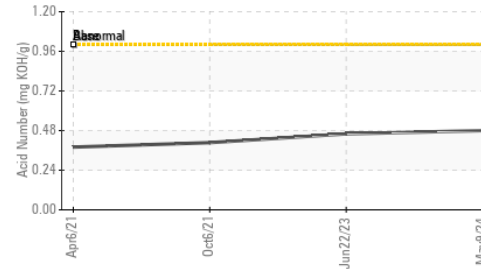


### Water (KF)

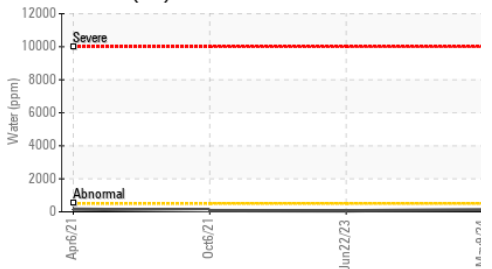

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	46.1	47.2

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

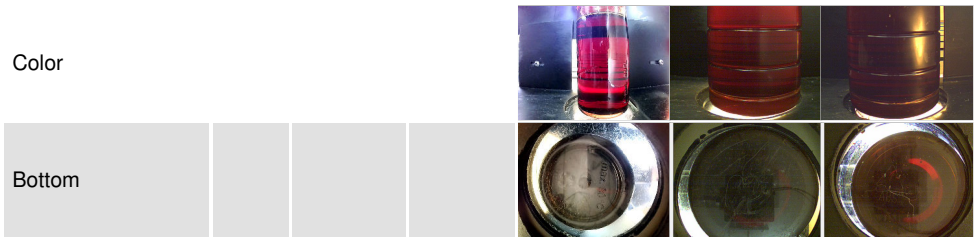


### GRAPHS


#### Ferrous Alloys

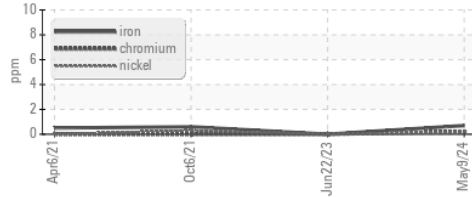


#### Non-ferrous Metals

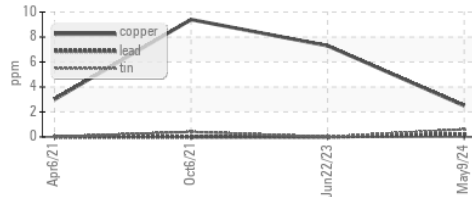



#### Viscosity @ 40°C

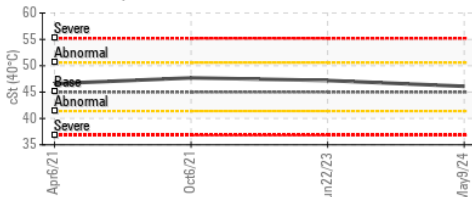

#### ▲ Particle Count

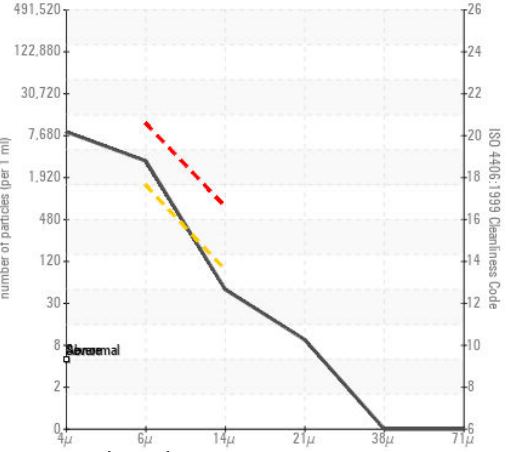

#### Acid Number

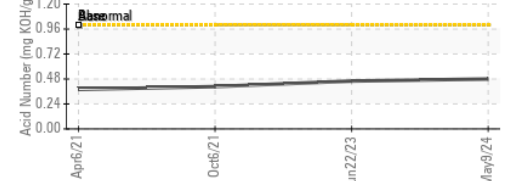

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KCPA013559 **Received** : 15 May 2024  
**Lab Number** : 06180672 **Tested** : 18 May 2024  
**Unique Number** : 11031998 **Diagnosed** : 18 May 2024 - Jonathan Hester  
**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**CASCADE DESIGNS**  
 11500 PRODUCTION DR  
 RENO, NV  
 US 89503  
 Contact: S. TENNA  
 tennas@cascaledgedesigns.com

T:  
F: