




# OIL ANALYSIS REPORT

Sample Rating Trend

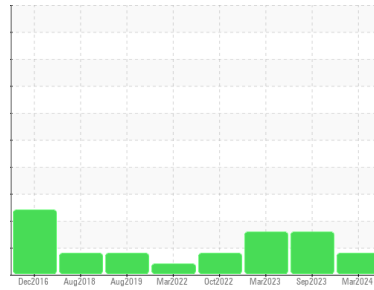

**SEDIMENT**



Machine Id  
**KAESER SK19 1533205 (S/N 1039)**  
 Component  
**Compressor**  
 Fluid  
**KAESER SIGMA (OEM) S-460 (--- GAL)**

**DIAGNOSIS**

**Recommendation**

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

**Wear**

All component wear rates are normal.

**Contamination**

There is a moderate amount of visible silt present in the sample.

**Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

**SAMPLE INFORMATION**

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>KCPA010117</b>	KC06005648	KCP52446	
Sample Date	Client Info	<b>18 Mar 2024</b>	25 Sep 2023	27 Mar 2023	
Machine Age	hrs	Client Info	<b>69738</b>	69735	69733
Oil Age	hrs	Client Info	<b>0</b>	0	2
Oil Changed	Client Info	<b>N/A</b>	N/A	Not Changd	
Sample Status		<b>ABNORMAL</b>	ABNORMAL	ABNORMAL	

**WEAR METALS**

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >50	<b>6</b>	0	0
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >10	<b>2</b>	<1	0
Lead	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m >50	<b>&lt;1</b>	0	<1
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

**ADDITIVES**

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	<b>0</b>	0	0
Barium	ppm	ASTM D5185m 90	<b>66</b>	8	44
Molybdenum	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 90	<b>97</b>	55	80
Calcium	ppm	ASTM D5185m 2	<b>2</b>	0	1
Phosphorus	ppm	ASTM D5185m	<b>2</b>	0	2
Zinc	ppm	ASTM D5185m	<b>6</b>	0	8
Sulfur	ppm	ASTM D5185m	<b>22117</b>	20624	20302

**CONTAMINANTS**

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	<b>1</b>	<1	<1
Sodium	ppm	ASTM D5185m	<b>4</b>	7	2
Potassium	ppm	ASTM D5185m >20	<b>2</b>	2	1
Water	%	ASTM D6304 >0.05	<b>0.047</b>	0.045	0.015
ppm Water	ppm	ASTM D6304 >500	<b>477</b>	451.2	157.5




**FLUID CLEANLINESS**

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	---	31919	26693
Particles >6µm	ASTM D7647 >1300	---	▲ 7403	▲ 9550
Particles >14µm	ASTM D7647 >80	---	▲ 306	▲ 369
Particles >21µm	ASTM D7647 >20	---	▲ 65	▲ 35
Particles >38µm	ASTM D7647 >4	---	3	0
Particles >71µm	ASTM D7647 >3	---	0	0
Oil Cleanliness	ISO 4406 (c) >--/17/13	---	▲ 22/20/15	▲ 22/20/16

**FLUID DEGRADATION**

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045 0.4	<b>0.37</b>	0.38	0.37


# OIL ANALYSIS REPORT

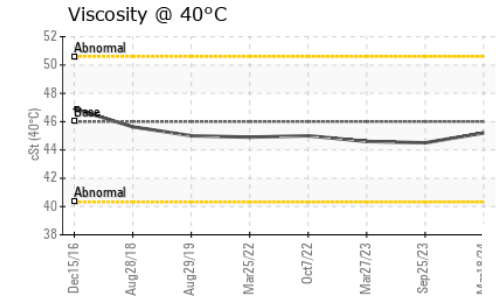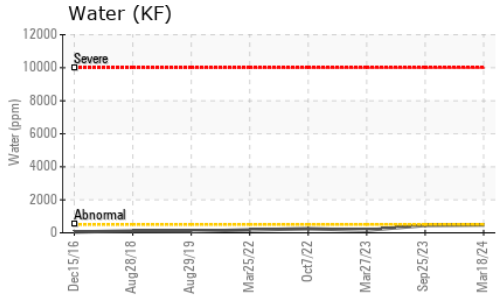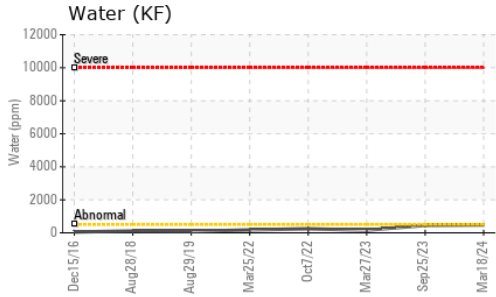





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	▲ MODER	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	45.2	44.5	44.6

**SAMPLE IMAGES**

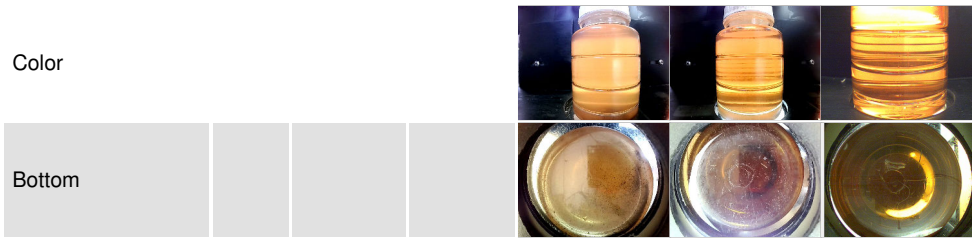

**GRAPHS**

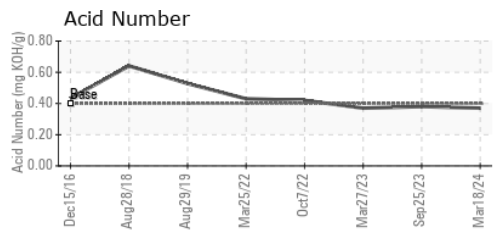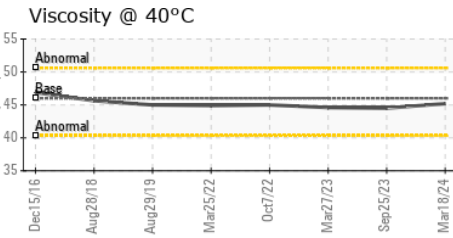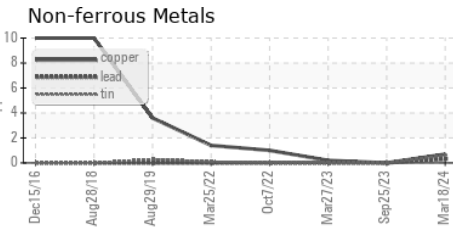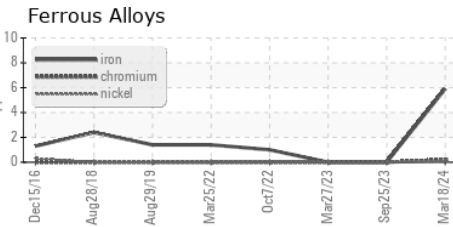

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KCPA010117 **Received** : 15 May 2024  
**Lab Number** : 06180676 **Tested** : 18 May 2024  
**Unique Number** : 11032002 **Diagnosed** : 18 May 2024 - Jonathan Hester  
**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )

**CHARLIE'S DODGE**  
 725 ILLINOIS AVE  
 MAUMEE, OH  
 US 43537  
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: