




OIL ANALYSIS REPORT



Machine Id
MACK GU713 DT30
 Component
Diesel Engine
 Fluid
SHELL ROTELLA T3 15W40 (--- GAL)

Sample Rating Trend

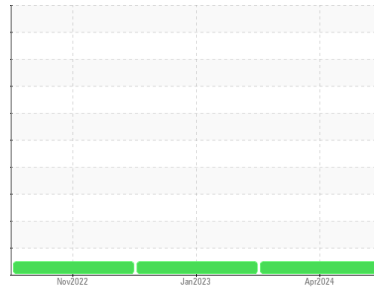

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PE0003176	PE0000405	PE0000451
Sample Date	Client Info			26 Apr 2024	03 Jan 2023	07 Nov 2022
Machine Age	hrs	Client Info		17013	0	14869
Oil Age	hrs	Client Info		489	320	300
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>120	21	6	5
Chromium	ppm	ASTM D5185m	>20	<1	<1	0
Nickel	ppm	ASTM D5185m	>5	0	1	0
Titanium	ppm	ASTM D5185m	>2	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>20	5	1	2
Lead	ppm	ASTM D5185m	>40	1	<1	<1
Copper	ppm	ASTM D5185m	>330	9	<1	<1
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	10	4	75	108
Barium	ppm	ASTM D5185m	0	<1	0	0
Molybdenum	ppm	ASTM D5185m	10	7	56	59
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	10	55	363	366
Calcium	ppm	ASTM D5185m	2600	2464	1714	1670
Phosphorus	ppm	ASTM D5185m	1050	976	942	940
Zinc	ppm	ASTM D5185m	1250	1304	1198	1048
Sulfur	ppm	ASTM D5185m	3900	4342	3523	3605

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	9	3	3
Sodium	ppm	ASTM D5185m		5	3	2
Potassium	ppm	ASTM D5185m	>20	3	1	0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>4	0.6	0.3	0.3
Nitration	Abs/cm	*ASTM D7624	>20	8.2	7.0	7.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.5	19.7	21

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	11.7	15.5	16.3
Base Number (BN)	mg KOH/g	ASTM D2896	10.6	5.6	8.3	9.1





OIL ANALYSIS REPORT

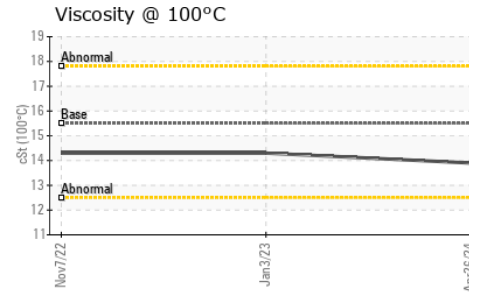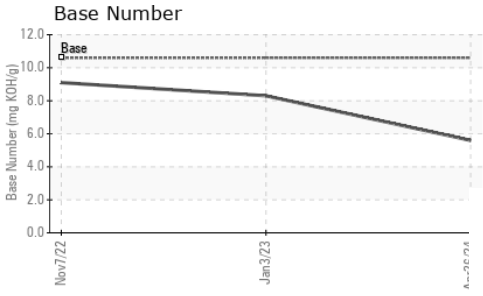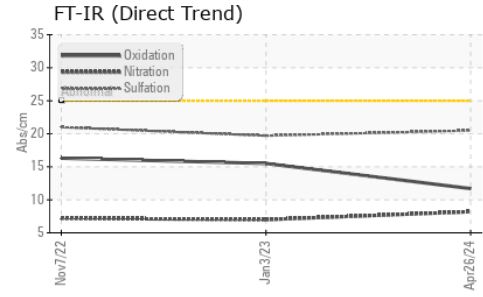

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.5	13.9	14.3

GRAPHS

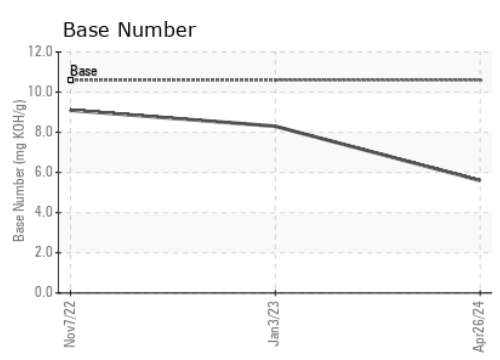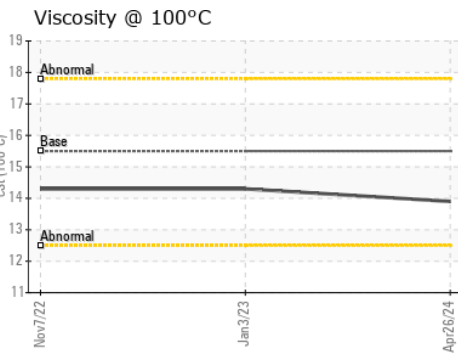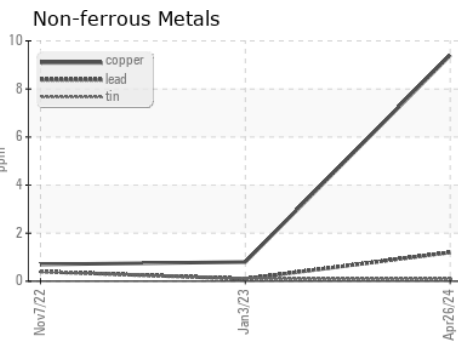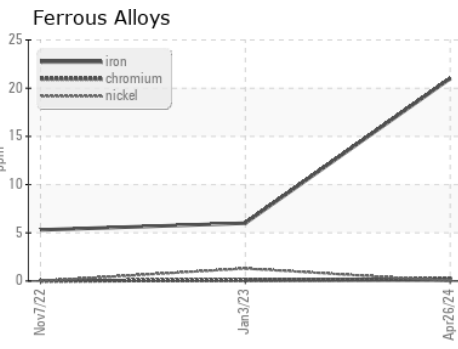

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PE0003176 **Received** : 15 May 2024
Lab Number : 06180859 **Tested** : 16 May 2024
Unique Number : 11032185 **Diagnosed** : 18 May 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: FT-IR, ICP, KV100, SCREEN, TBN)

SCHERMER CONSTRUCTION
 299 US-101
 HOQUIAM, WA
 US 98550
 Contact: Service Manager
 office@schmerconstruction.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)