

## **OIL ANALYSIS REPORT**

Sample Rating Trend





[W02008334] VOLVO A30F 82290

Component Diesel Engine Fluid {not provided} (11 GAL)

### DIAGNOSIS Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample. (Customer Sample Comment: W02008334)

Area

### Wear

All component wear rates are normal.

#### Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

#### Fluid Condition


The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		ML0001104		
Sample Date		Client Info		14 May 2024		
Machine Age	hrs	Client Info		12515		
Oil Age	hrs	Client Info		300		
Oil Changed		Client Info		Changed		
Sample Status				NORMAL		
CONTAMINATION	٧	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	6		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>10	0		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m	>2	<1		
Aluminum	ppm	ASTM D5185m	>30	2		
Lead	ppm	ASTM D5185m	>40	0		
Copper	ppm	ASTM D5185m	>20	2		
Tin	ppm	ASTM D5185m	>20	0		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
	le le			-		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		42		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		44		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		511		
Calcium	ppm	ASTM D5185m		1689		
Phosphorus	ppm	ASTM D5185m		780		
Zinc	ppm	ASTM D5185m		932		
Sulfur	ppm	ASTM D5185m		3022		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	6		
Sodium	ppm	ASTM D5185m		3		
Potassium	ppm	ASTM D5185m	>20	2		
Fuel	%	ASTM D3524	>3.0	2.8		
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.1		
Nitration	Abs/cm	*ASTM D7624	>20	8.3		
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.6		
		method	limit/base	current	history1	history2
FLUID DEGRADA						
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.8		
			>25	20.8 8.4		





# **OIL ANALYSIS REPORT**

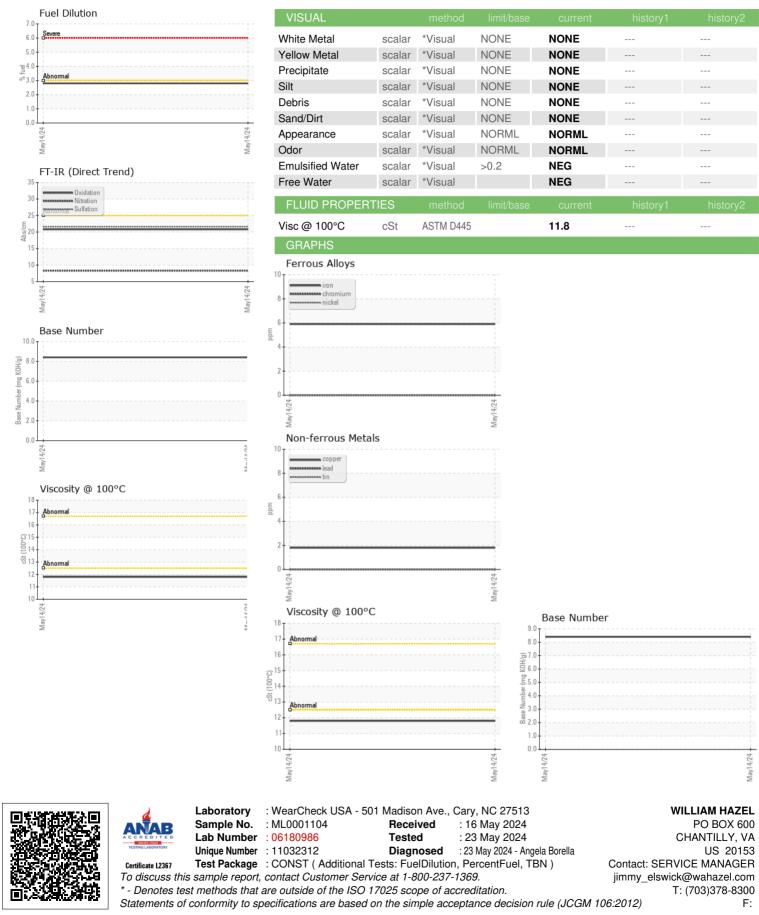

Submitted By: DARRELL ANDES

Page 2 of 2