




OIL ANALYSIS REPORT

Sample Rating Trend

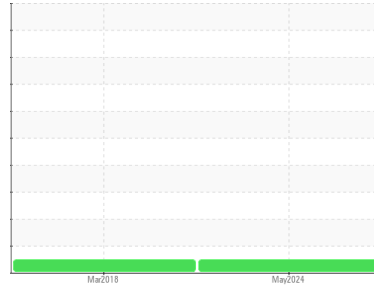

NORMAL



Machine Id
800-101P
 Component
Hydraulic System
 Fluid
SHELL TELLUS T32 (300 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0917860	WCI2328852	---
Sample Date	Client Info			14 May 2024	16 Mar 2018	---
Machine Age	hrs	Client Info		41	627	---
Oil Age	hrs	Client Info		0	0	---
Oil Changed	Client Info			Filtered	N/A	---
Sample Status				NORMAL	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.05	NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0	<1	---
Chromium	ppm	ASTM D5185m	>20	0	<1	---
Nickel	ppm	ASTM D5185m	>20	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		<1	0	---
Aluminum	ppm	ASTM D5185m	>20	0	2	---
Lead	ppm	ASTM D5185m	>20	0	0	---
Copper	ppm	ASTM D5185m	>20	<1	2	---
Tin	ppm	ASTM D5185m	>20	0	<1	---
Antimony	ppm	ASTM D5185m		---	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
Cadmium	ppm	ASTM D5185m		0	0	---





ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	2	---
Barium	ppm	ASTM D5185m		<1	<1	---
Molybdenum	ppm	ASTM D5185m		0	<1	---
Manganese	ppm	ASTM D5185m		0	<1	---
Magnesium	ppm	ASTM D5185m		44	16	---
Calcium	ppm	ASTM D5185m	48	11	52	---
Phosphorus	ppm	ASTM D5185m	337	324	323	---
Zinc	ppm	ASTM D5185m	426	255	269	---
Sulfur	ppm	ASTM D5185m	2280	738	2219	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	2	---
Sodium	ppm	ASTM D5185m		2	2	---
Potassium	ppm	ASTM D5185m	>20	<1	2	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>2500	882	215	---
Particles >6µm		ASTM D7647	>320	28	44	---
Particles >14µm		ASTM D7647	>80	1	4	---
Particles >21µm		ASTM D7647	>20	0	1	---
Particles >38µm		ASTM D7647	>4	0	0	---
Particles >71µm		ASTM D7647	>3	0	0	---
Oil Cleanliness		ISO 4406 (c)	>18/15/13	17/12/7	15/13/9	---



OIL ANALYSIS REPORT

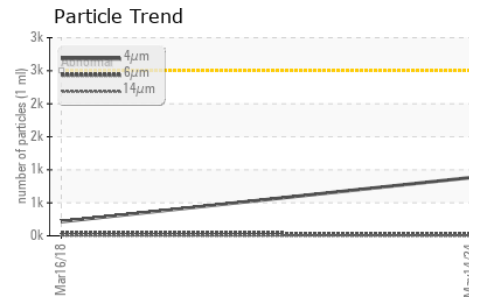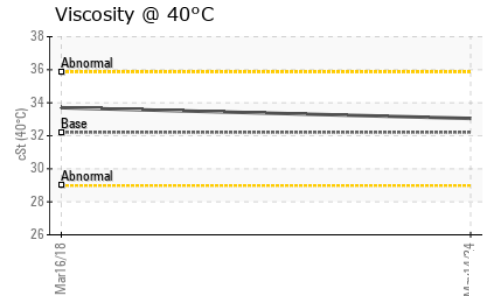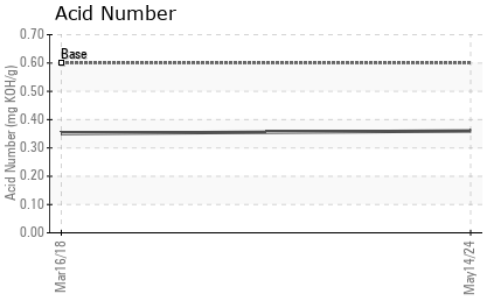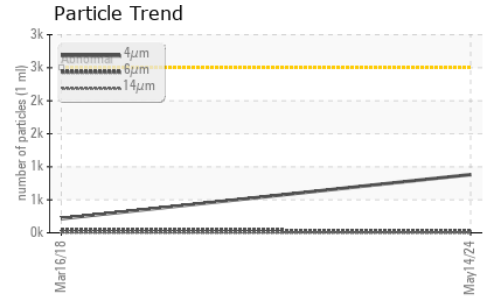


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	.6	0.36	0.351	---





VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	---
Free Water	scalar	*Visual		NEG	NEG	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	32.21	33.05	33.7	---

SAMPLE IMAGES

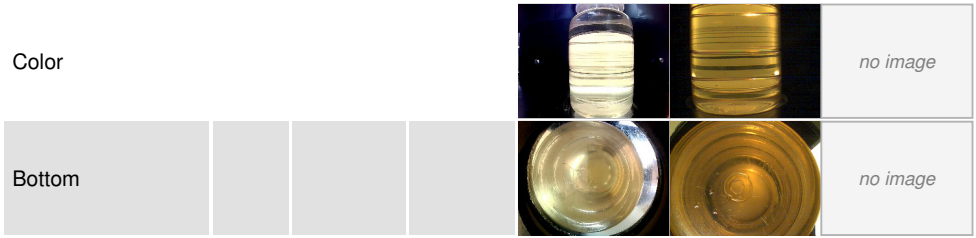

GRAPHS

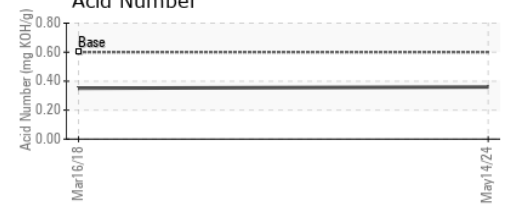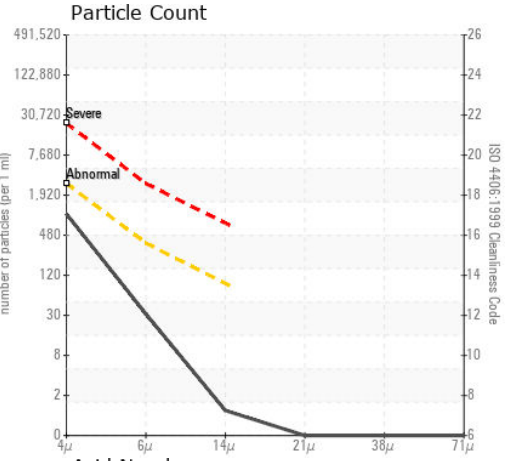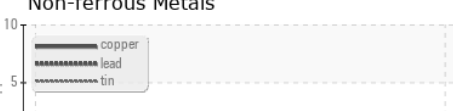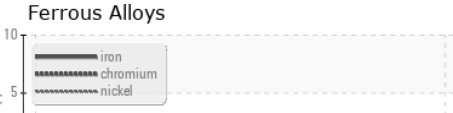

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0917860 **Received** : 16 May 2024
Lab Number : **06181289** **Tested** : 23 May 2024
Unique Number : 11032615 **Diagnosed** : 23 May 2024 - Wes Davis
Test Package : IND 2

TADANO MANTIS CORPORATION
 2680 S FRONT ST
 RICHLANDS, VA
 US 24641
 Contact: Mark McKinley
 mark.mckinley@tadano.com
 T: (615)224-7110
 F: (615)790-6803

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)