




OIL ANALYSIS REPORT

Sample Rating Trend

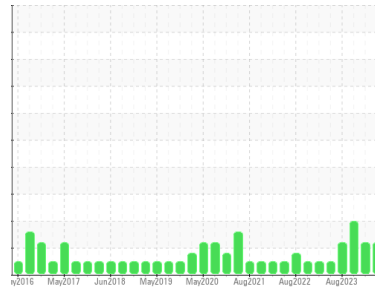

ISO



Machine Id
PLATE FREEZER POWER PACK 6 (S/N S0395MFMPHAA3)
 Component
Hydraulic System
 Fluid
PETRO CANADA PURITY FG AW HYDRAULIC 46 (65 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | USP0011834 | USP0007098 | USP0003733 |
| Sample Date | Client Info | | 15 May 2024 | 12 Feb 2024 | 13 Nov 2023 |
| Machine Age | hrs | Client Info | 0 | 0 | 0 |
| Oil Age | hrs | Client Info | 0 | 0 | 0 |
| Oil Changed | Client Info | | N/A | N/A | N/A |
| Sample Status | | | ATTENTION | ATTENTION | ABNORMAL |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|-----------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m >20 | 1 | <1 | 0 |
| Chromium | ppm | ASTM D5185m >20 | 1 | 2 | 2 |
| Nickel | ppm | ASTM D5185m >20 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | 0 | 0 | <1 |
| Silver | ppm | ASTM D5185m | <1 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m >20 | 0 | 0 | 0 |
| Lead | ppm | ASTM D5185m >20 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185m >20 | 10 | 10 | 10 |
| Tin | ppm | ASTM D5185m >20 | 0 | <1 | 0 |
| Vanadium | ppm | ASTM D5185m | 0 | 0 | <1 |
| Cadmium | ppm | ASTM D5185m | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|-------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m | 0 | 0 | 0 |
| Barium | ppm | ASTM D5185m | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185m | 0 | 0 | 0 |
| Magnesium | ppm | ASTM D5185m | <1 | 0 | 0 |
| Calcium | ppm | ASTM D5185m | 0 | 0 | 0 |
| Phosphorus | ppm | ASTM D5185m | 168 | 184 | 106 |
| Zinc | ppm | ASTM D5185m | 17 | 8 | 0 |
| Sulfur | ppm | ASTM D5185m | 23 | 13 | 0 |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|------------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185m >15 | <1 | 0 | 0 |
| Sodium | ppm | ASTM D5185m | 1 | 0 | <1 |
| Potassium | ppm | ASTM D5185m >20 | 0 | 0 | 0 |
| Water | % | ASTM D6304 >0.05 | 0.003 | 0.003 | 0.004 |
| ppm Water | ppm | ASTM D6304 >500 | 33 | 31 | 40.7 |

FLUID CLEANLINESS

| | method | limit/base | current | history1 | history2 |
|-----------------|--------------|------------|-----------------|----------|----------|
| Particles >4µm | ASTM D7647 | >5000 | 9209 | 9298 | 16690 |
| Particles >6µm | ASTM D7647 | >1300 | 2044 | 2212 | 4312 |
| Particles >14µm | ASTM D7647 | >160 | 107 | 95 | 268 |
| Particles >21µm | ASTM D7647 | >40 | 26 | 19 | 73 |
| Particles >38µm | ASTM D7647 | >10 | 0 | 1 | 2 |
| Particles >71µm | ASTM D7647 | >3 | 0 | 0 | 0 |
| Oil Cleanliness | ISO 4406 (c) | >19/17/14 | 20/18/14 | 20/18/14 | 21/19/15 |


FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 0.26 | 0.54 | 0.50 | 0.47 |




OIL ANALYSIS REPORT


Particle Trend

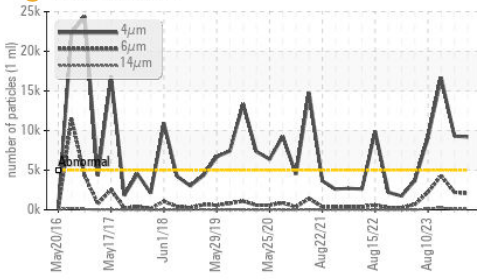


Water (KF)

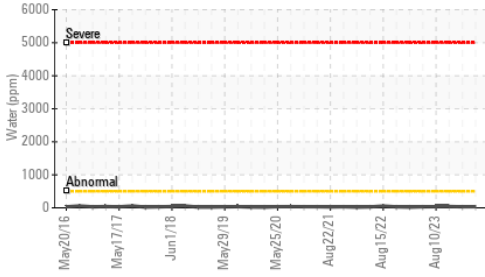


Acid Number

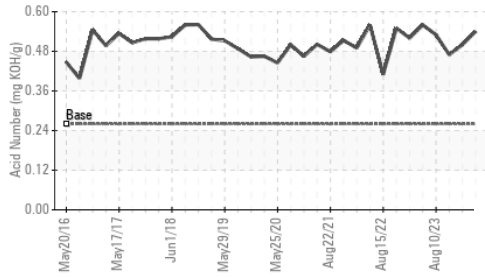

Water (KF)

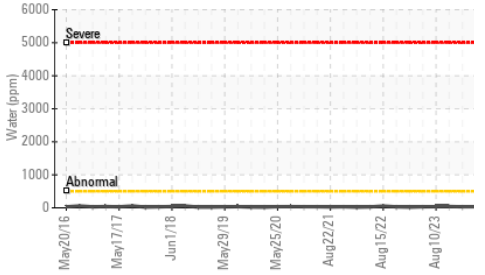

Viscosity @ 40°C

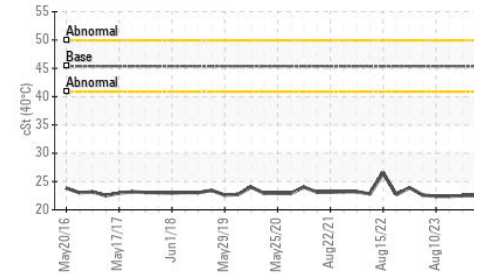

| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.05 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 | 45.36 | 22.5 | 22.5 |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

Color




Bottom




GRAPHS


Ferrous Alloys

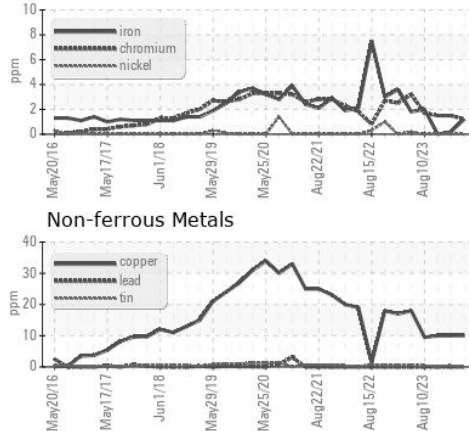


Non-ferrous Metals

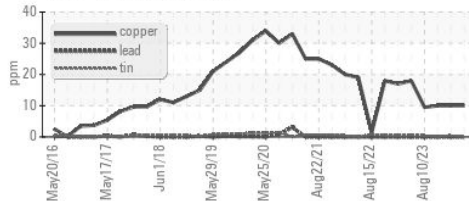


Viscosity @ 40°C

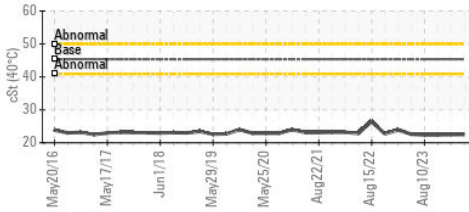

Particle Count

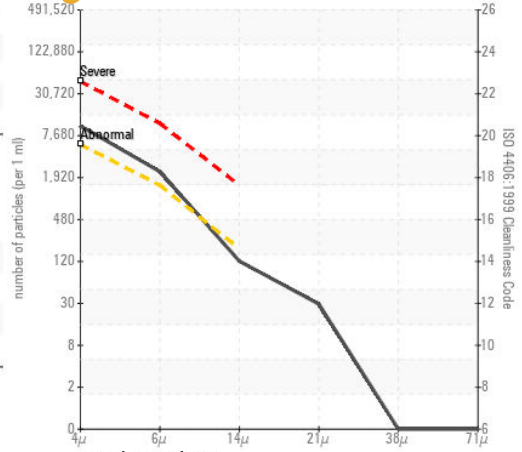

Acid Number

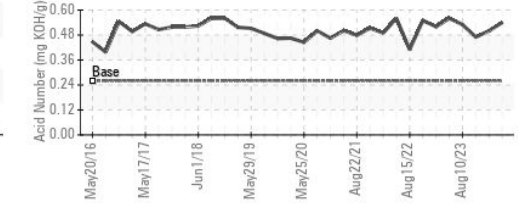

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : USP0011834
 Lab Number : 06181375
 Unique Number : 11032701
 Test Package : IND 2

Received : 16 May 2024
 Tested : 17 May 2024
 Diagnosed : 20 May 2024 - Jonathan Hester

CONAGRA FOODS - COUNCIL BLUFFS
 1023 4TH ST
 COUNCIL BLUFFS, IA
 US 51503
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: