


OIL ANALYSIS REPORT

Sample Rating Trend





ER1 3HS (S/N 0403) Refrigeration Compressor

Fluid USPI 1009-68 SC (95 GAL)

ENGINE ROOM 1

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		r2015 Apr20	16 Sep2017 Dec2018	Dec2019 Feb2021 Apr2022 J	un 2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0011822	USP0006861	USP0004067
Sample Date		Client Info		12 May 2024	18 Feb 2024	01 Dec 2023
Machine Age	hrs	Client Info		59210	57169	25249
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	0	0	0
Chromium	ppm	ASTM D5185m	>2	<1	0	<1
Nickel	ppm	ASTM D5185m		0	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>3	0	0	<1
Lead	ppm	ASTM D5185m	>2	0	0	0
Copper	ppm	ASTM D5185m	>8	<1	0	0
Tin	ppm	ASTM D5185m	>4	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		0	0	0
Calcium	ppm	ASTM D5185m		0	0	0
Phosphorus	ppm	ASTM D5185m		0	0	0
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m	50	0	0	0
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0	0	0
Sodium	ppm	ASTM D5185m		<1	<1	0
Potassium	ppm	ASTM D5185m	>20	0	<1	<1
Water	%	ASTM D6304	>0.01	0.001	0.002	0.001
ppm Water	ppm	ASTM D6304		10	20	0
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	481	5000	5080
Particles >6µm		ASTM D7647	>2500	67	1307	1345
Particles >14µm		ASTM D7647	>320	6	69	80
Particles >21µm		ASTM D7647	>80	2	14	18
Particles >38µm		ASTM D7647	>20	0	0	0
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	16/13/10	19/18/13	20/18/13
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974	0.005	0.014	0.014	0.015





OIL ANALYSIS REPORT



20k	4j.	tm tm μm	1				
15k - Abn	omal						
A.		4	1	M		V	\mathcal{M}
90 Nar28/15	9		00	Dec29/19	Renn .	Apr15/22	Jun16/23

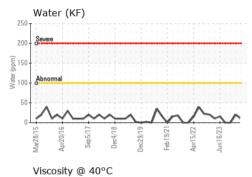





VISUAL		method				history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.01	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
		اه م مالم مما	11 11 //	a	hintom of	history O


FLUID PROPER	711ES	method			riistory i	riistoryz
Visc @ 40°C	cSt	ASTM D445	67	66.9	65.8	66.5

SAMPLE	IMAGES
C/ (IVII LL	IIVII (GEO

Color

Bottom



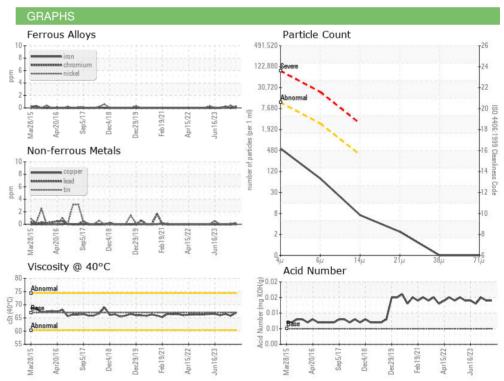





Certificate 12367

Laboratory Sample No.

Lab Number : 06181392 Unique Number : 11032718 Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : USP0011822 Received : 16 May 2024

Tested : 17 May 2024

Diagnosed : 20 May 2024 - Jonathan Hester

Contact: MIKE WEAVER mike.weaver@conagrafoods.com T:

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

TROY, OH

US 45373

F:

CONAGRA FOODS

801 DYE MILL ROAD